


INSTALLATION




STEP 9

Test the Redline LED Bar again for function.

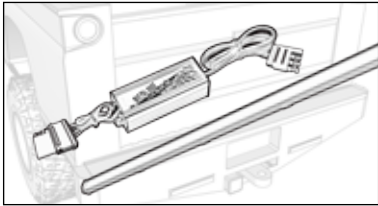

If you experience any error codes or dash lights, please install the optional Tailgate Module between the vehicle and Redline LED bar. **(Sold Separately)**

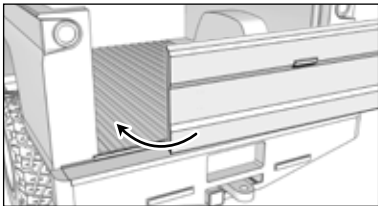

STEP 10

Reinstall vehicle tailgate.

DISCLAIMER

OPT7 Lighting is not liable for damages or personal injuries while installing this product. The Installation Guide is intended as assistance to reduce setup time. OPT7 Lighting assumes no responsibility for improper installation. If you are unfamiliar with your vehicle or inexperienced with aftermarket upgrades, please seek professional assistance.



NEED HELP?


Scan for tutorial videos, troubleshooting tips, and more.

2 YEAR WARRANTY


REDLINE TAILGATE

INSTALLATION GUIDE


WHAT'S INCLUDED

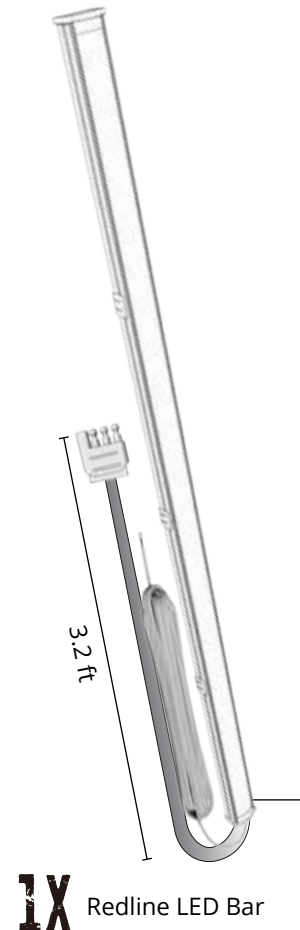


1X Redline LED Bar

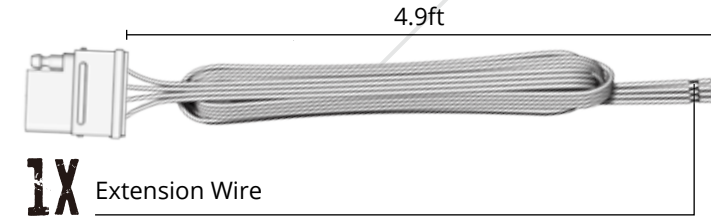


1X Extension Wire

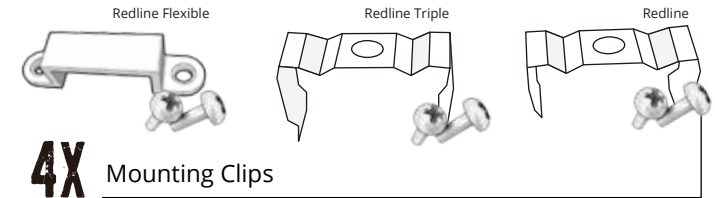


4X Mounting Clips

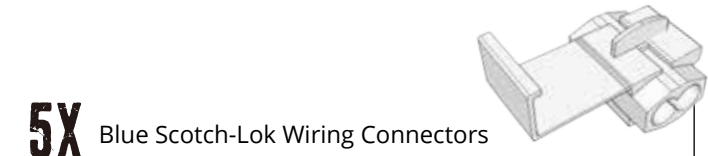

5X Blue Scotch-Lok Wiring Connectors




2X Red Scotch-Lok Wiring Connector

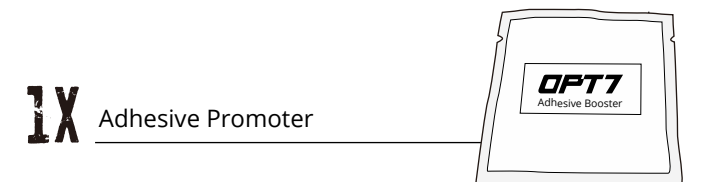


1X Adhesive Promoter

INSTALLATION

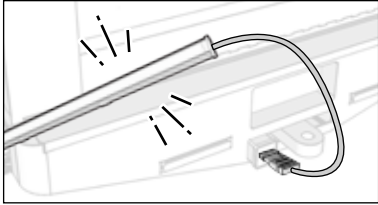


STEP 1

Test the Redline LED Bar for function before mounting on vehicle.

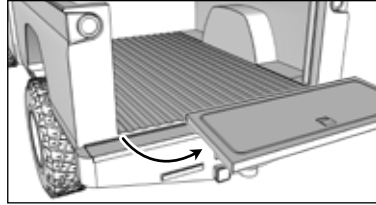

STEP 2


Remove tailgate from vehicle.

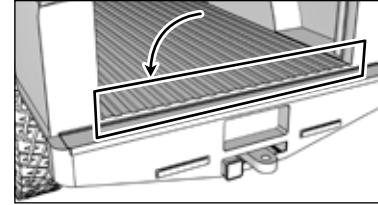

STEP 3


Thoroughly clean the area where the Redline LED Bar will be mounted.

ADHESIVE METHOD

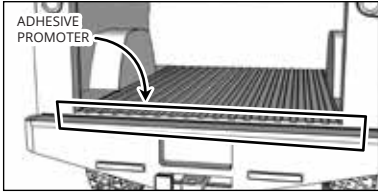

STEP 4

Apply the Adhesive Promoter to the cleaned area.

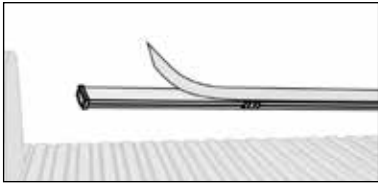


STEP 5

On the Redline LED Bar, peel the back off of the adhesive and apply firmly to the cleaned area.


OR

MOUNTING CLIP METHOD

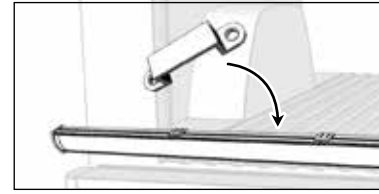


STEP 4

Mark out where you want to mount the included clips taking straightness and placement into consideration.

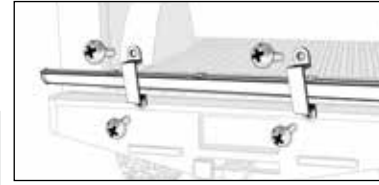


STEP 5

Use the included screws and clips to solidly mount the Redline LED bar to the vehicle.

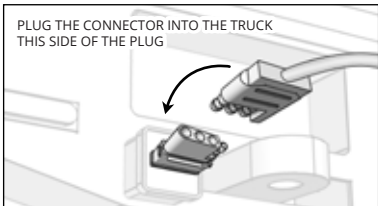

STEP 6

Plug the 4-pin flat connector into the proper receptacle on the vehicle.

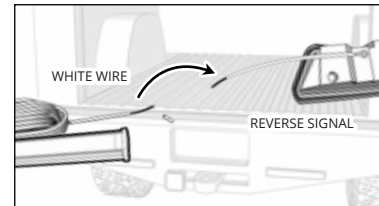

STEP 7

Splice the white wire coming from the Redline LED Bar into the reverse signal on the vehicle.

STEP 8

Optional: If hard-wiring, use image on the right to identify wire color functions and pair them to appropriately identified wires on vehicle.

TO REDLINE LED BAR

Ground
Running Light
Left Turn & Brake
Right Turn & Brake



TRAILER HARDWARE HARNESS

White/Ground
Brown/Running Light
Yellow/Left Turn & Brake
Green/Right Turn & Brake