

## EMC TEST REPORT

For

Ugreen Group Limited

HDMI Switch

Model No.: 40251

Additional Model No.: 20668, 20669, 20670, 20671, 20672, 20677, 20679, 20680,  
30941, 40201, 40202, 40203, 40205, 40207, 40216, 40218, 40234, 40251, 40276,  
40277, 40278, 40279, 40369, 40370, 40525, 40526, 40527, 40528, 40529, 40530,  
40531, 40532, 20639, 20614, 20630, 20665, 20667, 20666

Prepared for : Ugreen Group Limited  
Address : UGREEN Building, Longcheng Industrial Park,  
Longguanxi Road, Longhua, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an  
Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 11, 2016  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : October 11, 2016~ October 20, 2016  
Date of Report : October 20, 2016



<p><b>EMC TEST REPORT</b>  <b>EN 55032: 2015</b>                  Electromagnetic compatibility of multimedia equipment - Emission Requirements  <b>EN 55024: 2010</b>                  Information technology equipment-Immunity characteristics-Limits and methods of measurement of measurement</p>	
<b>Report Reference No. ....:</b>	<b>LCS161011001AE</b>
<b>Date Of Issue.....:</b>	October 20, 2016
<b>Testing Laboratory Name.....:</b>	<b>Shenzhen LCS Compliance Testing Laboratory Ltd.</b>
<b>Address .....</b>	1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China
<b>Testing Location/ Procedure .....</b>	Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/>
<b>Applicant's Name .....</b>	<b>Ugreen Group Limited</b>
<b>Address .....</b>	UGREEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, China
<b>Test Specification:</b>	
<b>Standard .....</b>	EN 55032: 2015 EN 61000-3-2: 2014 EN 61000-3-3: 2013 EN 55024: 2010
<b>Test Report Form No.....:</b>	LCSEMC-1.0
<b>TRF Originator.....:</b>	Shenzhen LCS Compliance Testing Laboratory Ltd.
<b>Master TRF .....</b>	Dated 2011-03
<p><b>SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.</b>                  This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</p>	
<b>Test Item Description.....:</b>	<b>HDMI Switch</b>
<b>Trade Mark.....:</b>	UGREEN
<b>Model/ Type Reference .....</b>	40251
<b>Ratings .....</b>	Input: DC 5V Output: DC 5V
<b>Result .....</b>	<b>Positive</b>

**Compiled by:**




Hana Zeng/ File administrators

**Supervised by:**



Glin Lu/ Technique principal

**Approved by:**

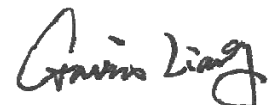

Gavin Liang/ Manager

**EMC -- TEST REPORT****Test Report No. : LCS161011001AE**October 20, 2016

Date of issue

Type/ Model..... : 40251

EUT..... : HDMI Switch

**Applicant..... : Ugreen Group Limited**Address..... : UGREEN Building, Longcheng Industrial Park, Longguanxi  
Road, Longhua, Shenzhen, China

Telephone..... : /

Fax..... : /

**Manufacturer..... : Ugreen Group Limited**Address..... : UGREEN Building, Longcheng Industrial Park, Longguanxi  
Road, Longhua, Shenzhen, China

Telephone..... : /

Fax..... : /

**Factory..... : Ugreen Group Limited**Address..... : UGREEN Building, Longcheng Industrial Park, Longguanxi  
Road, Longhua, Shenzhen, China

Telephone..... : /

Fax..... : /

**Test Result** according to the standards on page 8: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Revision	Issue Date	Revisions	Revised By
00	October 20, 2016	Initial Issue	Gavin Liang

## TABLE OF CONTENT

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS.....</b>	<b>8</b>
1.1.Description of Standards and Results.....	8
1.2.Description of Performance Criteria .....	9
<b>2. GENERAL INFORMATION .....</b>	<b>10</b>
2.1.Description of Device (EUT) .....	10
2.2.Description of Support Device .....	10
2.3.Description of Test Facility .....	10
2.4.Statement of the measurement uncertainty.....	10
2.5.Measurement Uncertainty .....	11
<b>3. measuring Devices and test equipment.....</b>	<b>12</b>
3.1.Conducted Disturbance .....	12
3.2.Disturbance Power .....	12
3.3.Radiated Electromagnetic Disturbance .....	12
3.4.Radiated Disturbance (Electric Field) .....	12
3.5.Harmonic Current.....	12
3.6.Voltage fluctuation and Flicker .....	12
3.8.RF Field Strength Susceptibility .....	13
3.9.Electrical Fast Transient/Burst .....	13
3.10.Surge .....	13
3.11.Conducted Susceptibility.....	13
3.12.Power Frequency Magnetic Field Susceptibility.....	13
3.13.Voltage Dips .....	13
3.14.Voltage Short Interruptions .....	13
<b>4. POWER LINE CONDUCTED EMISSION MEASUREMENT .....</b>	<b>14</b>
4.1.Block Diagram of Test Setup .....	14
4.2.Test Standard .....	14
4.3.EUT Configuration on Test .....	14
4.4.Operating Condition of EUT .....	14
4.5.Test Procedure .....	15
4.6.Test Results .....	15
<b>5. RADIATED EMISSION MEASUREMENT .....</b>	<b>18</b>
5.1.Block Diagram of Test Setup .....	18
5.2.Measuring Standard.....	18
5.3.Radiated Emission Limits .....	18
5.4.EUT Configuration on Test .....	19
5.5.Operating Condition of EUT .....	19
5.6.Test Procedure .....	19
5.7.Test Results .....	19
<b>6. HARMONIC CURRENT EMISSION MEASUREMENT.....</b>	<b>22</b>
6.1.Block Diagram of Test Setup .....	22
6.2.Test Standard .....	22
6.3.Operation Condition of EUT .....	22
6.4.Test Results .....	22
7.1.Block Diagram of Test Setup .....	23
7.2.Measuring Standard.....	23
7.3.Operation Condition of EUT .....	23
7.4.Test Results .....	23
<b>8. ELECTROSTATIC DISCHARGE IMMUNITY TEST .....</b>	<b>24</b>
8.1.Block Diagram of Test Setup .....	24
8.2.Test Standard .....	24
8.3.Severity Levels and Performance Criterion .....	24
8.4.EUT Configuration on Test .....	24

8.5.Operating Condition of EUT .....	24
8.6.Test Procedure .....	25
8.7.Test Results .....	25
<b>9. RF FIELD STRENGTH SUSCEPTIBILITY TEST .....</b>	<b>27</b>
9.1.Block Diagram of Test .....	27
9.2.Test Standard .....	27
9.3.Severity Levels and Performance Criterion .....	27
9.4.EUT Configuration on Test .....	28
9.5.Operating Condition of EUT .....	28
9.6.Test Procedure .....	28
9.7.Test Results .....	28
<b>10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST .....</b>	<b>30</b>
10.1.Block Diagram of Test Setup .....	30
10.2.Test Standard .....	30
10.3.Severity Levels and Performance Criterion .....	30
10.4.EUT Configuration on Test .....	30
10.5.Operating Condition of EUT .....	30
10.6.Test Procedure .....	31
10.7.Test Results .....	31
<b>11. SURGE IMMUNITY TEST .....</b>	<b>33</b>
11.1.Block Diagram of Test Setup.....	33
11.2.Test Standard .....	33
11.3.Severity Levels and Performance Criterion.....	33
11.4.EUT Configuration on Test .....	33
11.5.Operating Condition of EUT .....	33
11.6.Test Procedure .....	34
11.7.Test Results.....	34
<b>12. INJECTED CURRENTS SUSCEPTIBILITY TEST .....</b>	<b>36</b>
12.1.Block Diagram of Test Setup .....	36
12.2.Test Standard .....	36
12.3.Severity Levels and Performance Criterion .....	36
12.4.EUT Configuration on Test .....	36
12.5.Operating Condition of EUT .....	36
12.6.Test Procedure .....	37
12.7.Test Results .....	37
<b>13. MAGNETIC FIELD SUSCEPTIBILITY TEST .....</b>	<b>39</b>
13.1.Block Diagram of Test Setup .....	39
13.2.Test Standard .....	39
13.3.Severity Levels and Performance Criterion .....	39
13.4.EUT Configuration on Test .....	39
13.5.Test Procedure .....	40
13.6.Test Results .....	40
<b>14. VOLTAGE DIPS AND INTERRUPTIONS TEST .....</b>	<b>42</b>
14.1.Block Diagram of Test Setup .....	42
14.2.Test Standard .....	42
14.3.Severity Levels and Performance Criterion .....	42
14.4.EUT Configuration on Test .....	42
14.5.Operating Condition of EUT .....	42
14.6.Test Procedure .....	43
14.7.Test Results .....	43
<b>15. PHOTOGRAPH .....</b>	<b>45</b>
15.1.Photo of Power Line Conducted Measurement.....	45
15.2.Photo of Radiated Measurement .....	45
15.3.Photo of Harmonic & Flicker Measurement .....	46
15.4.Photo of Electrostatic Discharge Test.....	46
15.5. Photo of Electrical Fast Transient/Burst Test .....	47
15.6.Photo of Surge Test .....	47

15.7.Photo of Injected Currents Susceptibility Test ..... 48  
15.8.Photo of Magnetic Field Immunity Test..... 48  
15.9.Photo of Voltage Dips and Interruptions Test..... 49  
**16. EXTERNAL AND INTERNAL PHOTOS OF THE EUT..... 50**

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

<b>EMISSION (EN 55032: 2015)</b>			
<b>Description of Test Item</b>	<b>Standard</b>	<b>Limits</b>	<b>Results</b>
Conducted disturbance at mains terminals	EN 55032: 2015	Class B	PASS
Conducted disturbance at telecommunication port	EN 55032: 2015	Class B	N/A
Radiated disturbance	EN 55032: 2015	Class B	PASS
Harmonic current emissions	EN 61000-3-2: 2014	Class A	PASS
Voltage fluctuations & flicker	EN 61000-3-3: 2013	-----	PASS
<b>IMMUNITY (EN 55024: 2010)</b>			
<b>Description of Test Item</b>	<b>Basic Standard</b>	<b>Performance Criteria</b>	<b>Results</b>
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2006+A1: 2010	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4: 2012	B	PASS
Surge (Input a.c. power ports)	EN 61000-4-5: 2014	B	PASS
Surge (Telecommunication ports)		B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2014	A	PASS
Power frequency magnetic field	EN 61000-4-8: 2010	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11: 2004	B	PASS
Voltage dips, 30% reduction		C	PASS
Voltage interruptions		C	PASS
N/A is an abbreviation for Not Applicable.			

<b>Test mode:</b>	
Mode 1	Operate in HDMI Mode

## 1.2. Description of Performance Criteria

### General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

#### 1.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### 1.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### 1.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : HDMI Switch

Trade Mark : UGREEN

Model Number : 40251

Power Supply : Input: DC 5V  
Output: DC 5V

EUT Clock Frequency :  $\leq$  108MHz

### 2.2. Description of Support Device

Adapter : Power Supply: Input: 100-240V~, 50/60Hz, 0.5A  
Output: 5V $\overline{=}$ , 2.5A

### 2.3. Description of Test Facility

EMC Lab. : CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

### 2.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 2.5.Measurement Uncertainty

Test	Parameters	Expanded uncertainty (U <sub>lab</sub> )	Expanded uncertainty (U <sub>cispr</sub> )
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	$\pm 2.63$ dB $\pm 2.35$ dB	$\pm 4.0$ dB $\pm 3.6$ dB
Power disturbance	Level accuracy (30MHz to 300MHz)	$\pm 2.90$ dB	$\pm 4.5$ dB
Electromagnetic Radiated Emission (3-loop)	Level accuracy (9kHz to 30MHz)	$\pm 3.60$ dB	N/A
Radiated Emission	Level accuracy (9kHz to 30MHz)	$\pm 3.68$ dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	$\pm 3.48$ dB	$\pm 5.2$ dB
Radiated Emission	Level accuracy (above 1000MHz)	$\pm 3.90$ dB	N/A
Mains Harmonic	Voltage	$\pm 0.510\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 0.510\%$	N/A

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### 3. MEASURING DEVICES AND TEST EQUIPMENT

#### 3.1. Conducted Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESR 7	101182	2016-06-18
2	10dB Attenuator	SCHWARZBECK	MTS-IMP136	261115-001-0032	2016-06-18
3	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2016-06-18
4	EMI Test Software	AUDIX	E3	N/A	N/A
5	ISN	SCHWARZBECK	NTFM 8158	NTFM 8158 0120	2016-06-18

#### 3.2. Disturbance Power

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESR 7	101181	2016-06-18
2	Absorbing clamp	ROHDE & SCHWARZ	MDS 21	4033	2016-10-28
3	EMI Test Software	AUDIX	E3	N/A	N/A
4	6dB Attenuator	N/A	N/A	50FP-006-H3B	2016-06-18

#### 3.3. Radiated Electromagnetic Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESR 7	101142	2016-06-18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI3	101840	2016-06-18
3	Triple-loop Antenna	LAPLACE	MK II-A	9161	2016-06-18
4	10dB Attenuator	LAPLACE	HAT-10	15542	2016-06-18
5	EMI Test Software	AUDIX	E3	N/A	N/A

#### 3.4. Radiated Disturbance (Electric Field)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2016-06-18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESR 7	101181	2016-06-18
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2016-04-18
4	EMI Test Software	AUDIX	E3	N/A	2016-06-18
5	Positioning Controller	MF	MF-7082	/	2016-06-18

#### 3.5. Harmonic Current

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2016-06-18

#### 3.6. Voltage fluctuation and Flicker

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2016-06-18

#### 3.7. Electrostatic Discharge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	SCHLODER	SESD 230	604035	2016-06-18

### 3.8.RF Field Strength Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	SIGNAL GENERATOR	R&S	SMB100A	105942	2016-09-14
2	RF Power Amplifier	BONN Elektronik	BLWA0830-160/100/40D	128740	2016-09-14
3	Log-periodic Antenna	SCHWARZBECK	STLP9128D	043	2016-09-14
4	Power Meter	R&S	102031	16829	2016-09-14

### 3.9.Electrical Fast Transient/Burst

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Electrical fast transient(EFT)generator	3CTEST	EFT-4021	EC0461044	2016-06-18
2	Coupling Clamp	3CTEST	EFTC	EC0441098	2016-06-18

### 3.10.Surge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Surge test system	EM test	UCS 500 M4	0101-34	2016-11-19

### 3.11.Conducted Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Simulator	FRANKONIA	CIT-10	A126A1195	2016-06-18
2	CDN	FRANKONIA	CDN-M2	5100100100	2016-06-18
3	CDN	FRANKONIA	CDN-M3	0900-11	2016-06-18
4	Attenuator	FRANKONIA	ATT6	0010222A	2016-06-18
5	Infuse tongs	EMTEST	EM-Clamp	0513A031201	2016-06-18

### 3.12.Power Frequency Magnetic Field Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power frequency mag-field generator System	EVERFINE	EMS61000-8K	906003	2016-06-18

### 3.13.Voltage Dips


Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2016-06-18

### 3.14.Voltage Short Interruptions

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2016-06-18

## 4. POWER LINE CONDUCTED EMISSION MEASUREMENT

### 4.1. Block Diagram of Test Setup

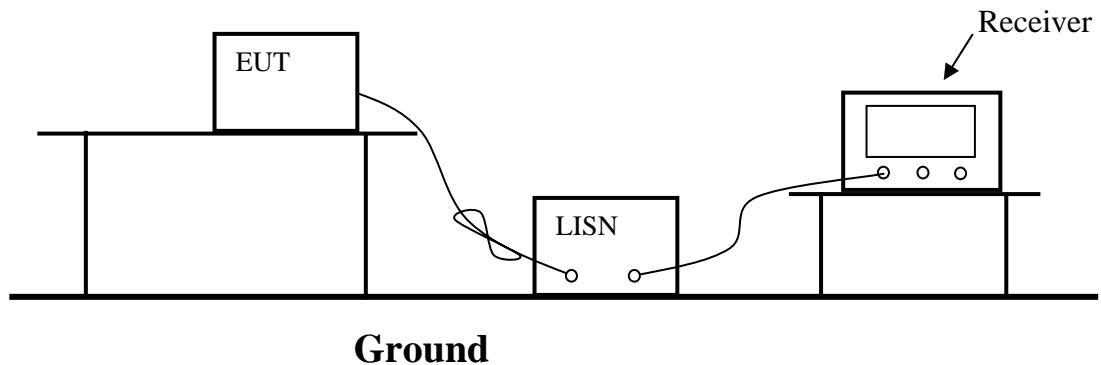

### 4.2. Test Standard

EN 55032: 2015

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 4.3. EUT Configuration on Test

The following equipments are installed on Conducted Emission Measurement to see EN 55032 requirements and operating in a manner which tends to maximize its emission characteristics in normal application.

### 4.4. Operating Condition of EUT

4.4.1. Setup the EUT as shown on Section 4.1.

4.4.2. Turn on the power of all equipments.

4.4.3. Let the EUT work in measuring mode (ON) and measure it.

#### 4.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided 50-ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter is set at 9kHz in 150kHz~30MHz.


The frequency range from 150kHz to 30MHz is investigated

#### 4.6. Test Results

**PASS.**

The test result please refer to the next page.


<b>Model No.</b>	40251	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.4°C, 56% RH	<b>Test Engineer</b>	Davey Xu
<b>Pol</b>	Line	<b>Testing Voltage</b>	230V

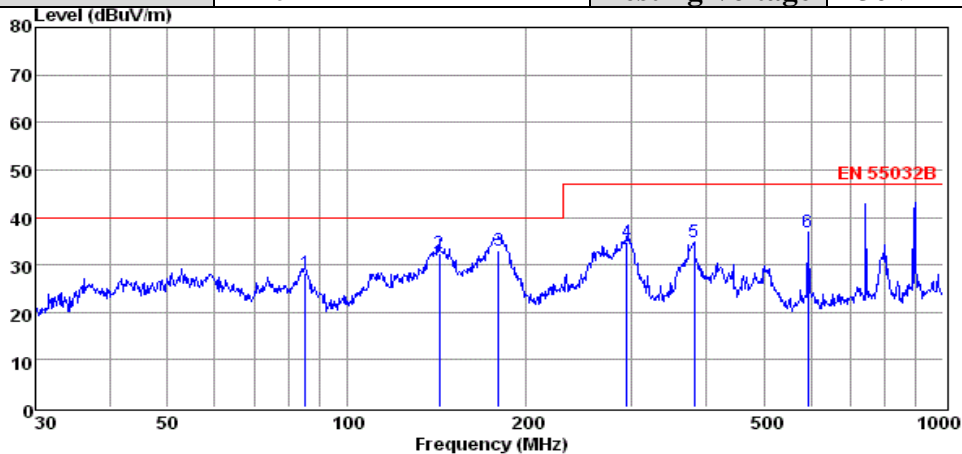

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	85.00	17.60	0.47	10.31	28.38	40.00	-11.62	QP
2	142.82	23.54	0.71	8.21	32.46	40.00	-7.54	QP
3	179.39	22.58	0.89	9.64	33.11	40.00	-6.89	QP
4	295.15	20.80	1.08	12.97	34.85	47.00	-12.15	QP
5	382.59	19.10	1.13	14.65	34.88	47.00	-12.12	QP
6	593.05	16.96	1.51	18.32	36.79	47.00	-10.21	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

<b>Model No.</b>	40251	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.4°C, 56% RH	<b>Test Engineer</b>	Davey Xu
<b>Pol</b>	Neutral	<b>Testing Voltage</b>	230V

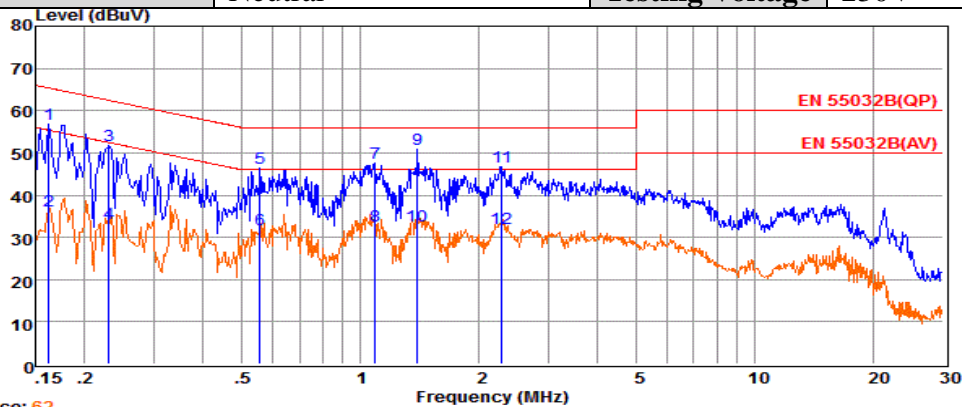


Trace: 62

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.16	37.24	9.67	0.02	10.00	56.93	65.34	-8.41	QP
2	0.16	16.62	9.67	0.02	10.00	36.31	55.33	-19.02	Average
3	0.23	32.06	9.59	0.03	10.00	51.68	62.44	-10.76	QP
4	0.23	13.61	9.59	0.03	10.00	33.23	52.43	-19.20	Average
5	0.56	26.59	9.62	0.04	10.00	46.25	56.00	-9.75	QP
6	0.56	12.06	9.62	0.04	10.00	31.72	46.00	-14.28	Average
7	1.09	27.96	9.63	0.05	10.00	47.64	56.00	-8.36	QP
8	1.09	13.09	9.63	0.05	10.00	32.77	46.00	-13.23	Average
9	1.40	31.23	9.63	0.05	10.00	50.91	56.00	-5.09	QP
10	1.40	13.03	9.63	0.05	10.00	32.71	46.00	-13.29	Average
11	2.28	27.08	9.63	0.05	10.00	46.76	56.00	-9.24	QP
12	2.29	12.49	9.63	0.05	10.00	32.17	46.00	-13.83	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

<b>Model No.</b>	40251	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.4°C, 56% RH	<b>Test Engineer</b>	Davey Xu
<b>Pol</b>	Line	<b>Testing Voltage</b>	110V

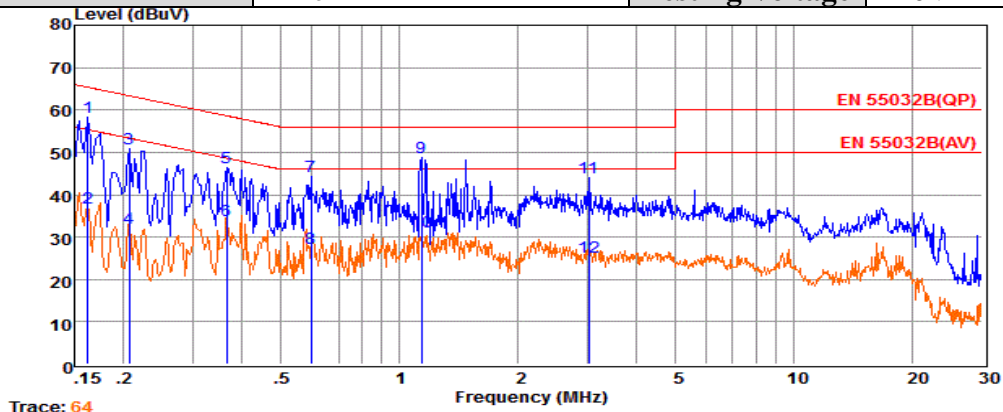


Trace: 64

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.16	38.78	9.59	0.02	10.00	58.39	65.34	-6.95	QP
2	0.16	17.21	9.59	0.02	10.00	36.82	55.33	-18.51	Average
3	0.21	31.19	9.63	0.03	10.00	50.85	63.36	-12.51	QP
4	0.21	12.52	9.63	0.03	10.00	32.18	53.36	-21.18	Average
5	0.37	26.74	9.62	0.03	10.00	46.39	58.61	-12.22	QP
6	0.37	14.37	9.62	0.03	10.00	34.02	48.60	-14.58	Average
7	0.60	24.76	9.63	0.04	10.00	44.43	56.00	-11.57	QP
8	0.60	7.76	9.63	0.04	10.00	27.43	46.00	-18.57	Average
9	1.14	29.22	9.63	0.05	10.00	48.90	56.00	-7.10	QP
10	1.14	11.65	9.63	0.05	10.00	31.33	46.00	-14.67	Average
11	3.03	24.42	9.64	0.06	10.00	44.12	56.00	-11.88	QP
12	3.03	5.46	9.64	0.06	10.00	25.16	46.00	-20.84	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

<b>Model No.</b>	40251	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.4°C, 56% RH	<b>Test Engineer</b>	Davey Xu
<b>Pol</b>	Neutral	<b>Testing Voltage</b>	110V

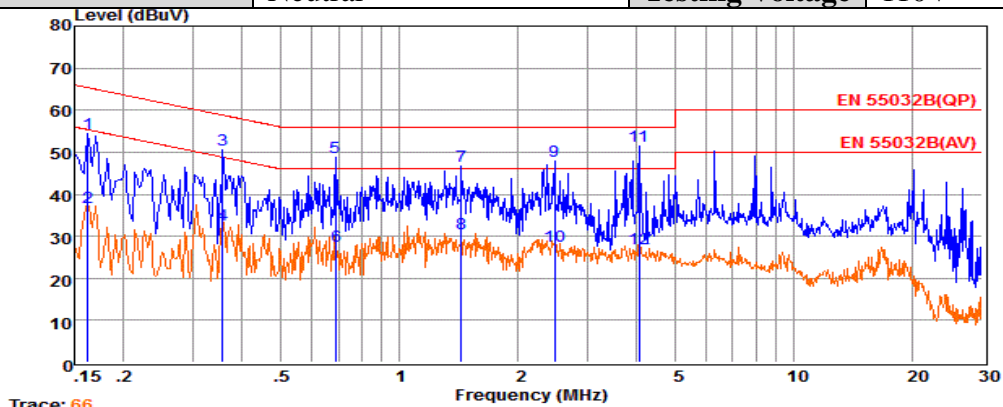

Trace: 66


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.16	34.70	9.67	0.02	10.00	54.39	65.34	-10.95	QP
2	0.16	17.13	9.67	0.02	10.00	36.82	55.33	-18.51	Average
3	0.36	30.82	9.61	0.03	10.00	50.46	58.83	-8.37	QP
4	0.36	13.02	9.61	0.03	10.00	32.66	48.82	-16.16	Average
5	0.69	29.19	9.63	0.04	10.00	48.86	56.00	-7.14	QP
6	0.69	7.88	9.63	0.04	10.00	27.55	46.00	-18.45	Average
7	1.43	26.88	9.63	0.05	10.00	46.56	56.00	-9.44	QP
8	1.43	10.93	9.63	0.05	10.00	30.61	46.00	-15.39	Average
9	2.47	28.13	9.64	0.05	10.00	47.82	56.00	-8.18	QP
10	2.47	7.97	9.64	0.05	10.00	27.66	46.00	-18.34	Average
11	4.05	31.64	9.65	0.06	10.00	51.35	56.00	-4.65	QP
12	4.05	7.40	9.65	0.06	10.00	27.11	46.00	-18.89	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

## 5. RADIATED EMISSION MEASUREMENT

### 5.1. Block Diagram of Test Setup

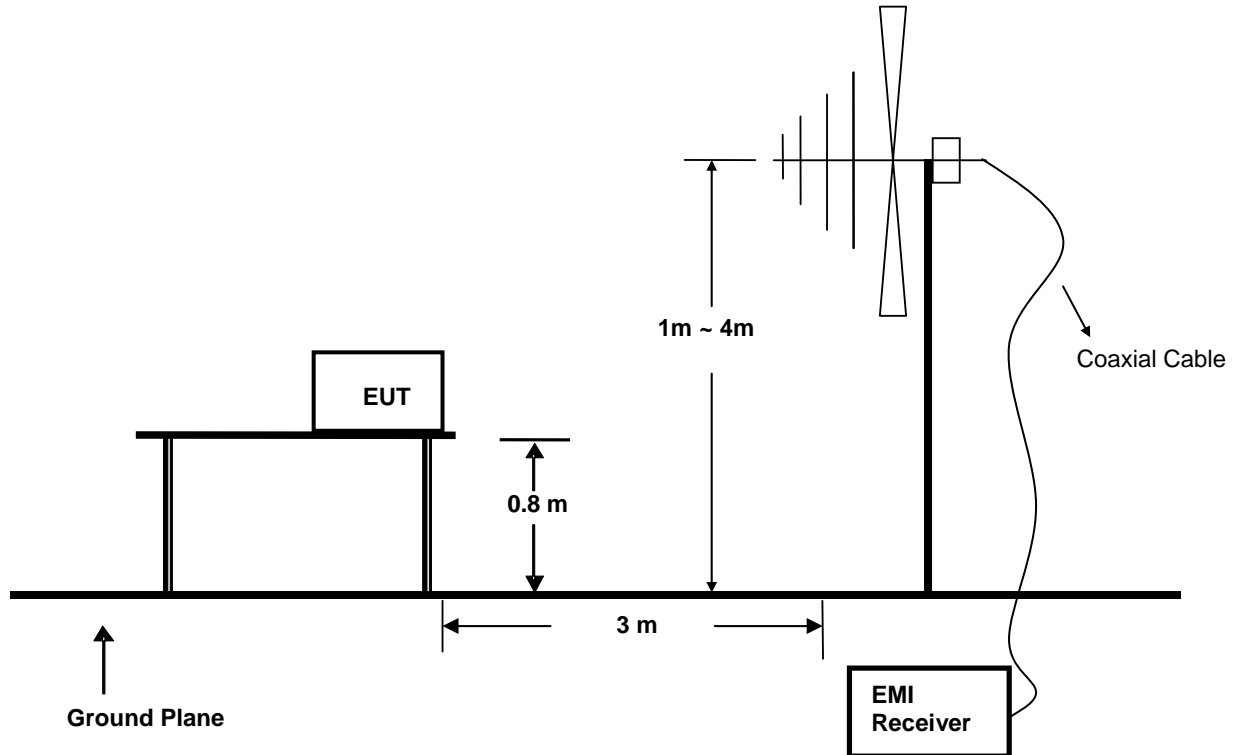

### 5.2. Measuring Standard

EN 55032: 2015

### 5.3. Radiated Emission Limits

EN 55032 Limits:

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

#### Limits for radiated disturbance Blow 1GHz

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB $\mu$ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note:(1)The smaller limit shall apply at the combination point between two frequency bands.

(2)Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

## 5.4.EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

## 5.5.Operating Condition of EUT

5.5.1.Turn on the power.

5.5.2.After that, let the EUT work in test mode (ON) and measure it.

## 5.6.Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the Receiver is set at 120kHz.


The frequency range from 30MHz to 1000MHz is investigated.

## 5.7.Test Results

**PASS.**

The test result please refer to the next page.


<b>Model No.</b>	40251	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.3°C, 56.8% RH	<b>Test Engineer</b>	Davey Xu
<b>Pol</b>	Vertical	<b>Testing Voltage</b>	230V

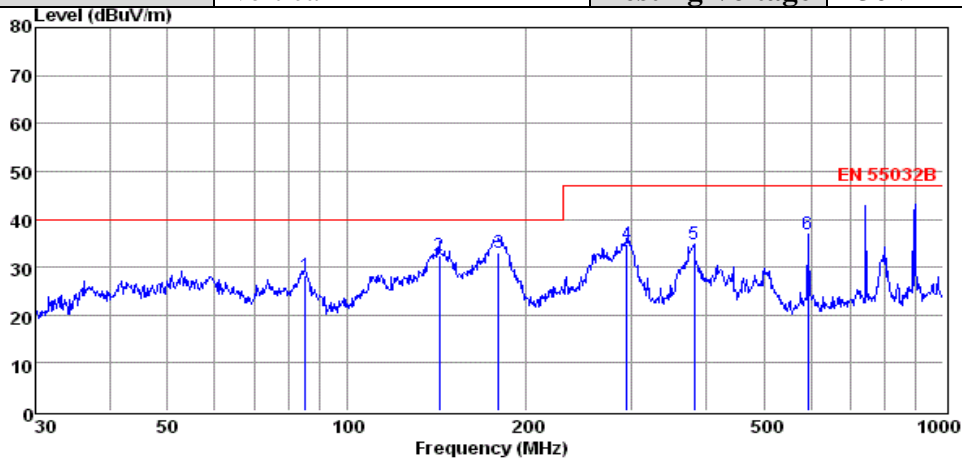

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	85.00	17.60	0.47	10.31	28.38	40.00	-11.62	QP
2	142.82	23.54	0.71	8.21	32.46	40.00	-7.54	QP
3	179.39	22.58	0.89	9.64	33.11	40.00	-6.89	QP
4	295.15	20.80	1.08	12.97	34.85	47.00	-12.15	QP
5	382.59	19.10	1.13	14.65	34.88	47.00	-12.12	QP
6	593.05	16.96	1.51	18.32	36.79	47.00	-10.21	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that at 20db below the official limit are not reported

<b>Model No.</b>	40251	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.3°C, 56.8% RH	<b>Test Engineer</b>	Davey Xu
<b>Pol</b>	Horizontal	<b>Testing Voltage</b>	230V

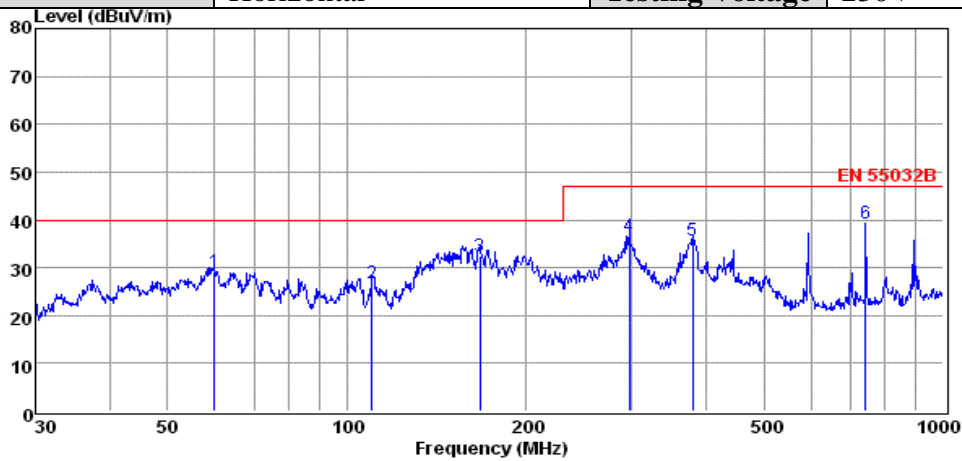


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	59.86	15.89	0.49	12.70	29.08	40.00	-10.92	QP
2	110.18	13.80	0.61	12.22	26.63	40.00	-13.37	QP
3	167.24	22.87	0.77	8.89	32.53	40.00	-7.47	QP
4	297.22	22.56	1.12	13.01	36.69	47.00	-10.31	QP
5	379.91	19.86	1.18	14.59	35.63	47.00	-11.37	QP
6	742.26	18.24	1.78	19.34	39.36	47.00	-7.64	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that at 20db below the official limit are not reported

Note: Pre-Scan all mode, Thus record worse case mode result in this report.


<b>Model No.</b>	40251	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.3°C, 56.8% RH	<b>Test Engineer</b>	Davey Xu
<b>Pol</b>	Vertical	<b>Testing Voltage</b>	110V

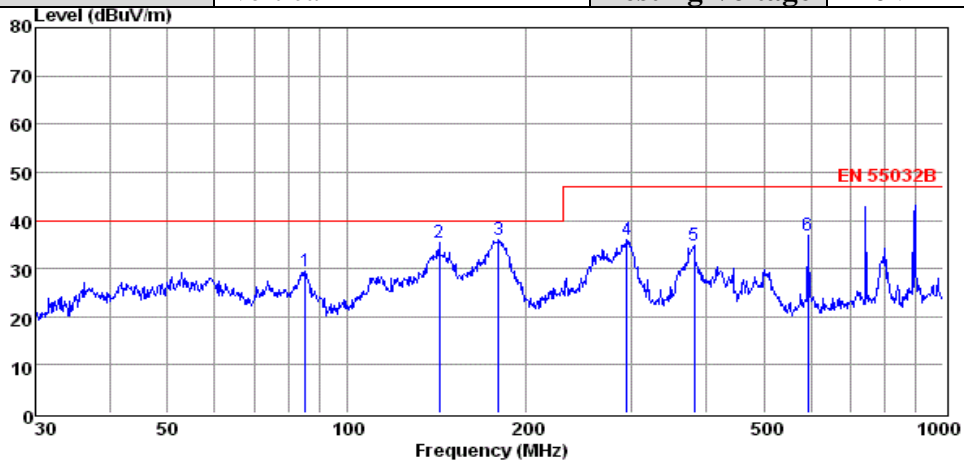

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	85.00	18.60	0.47	10.31	29.38	40.00	-10.62	QP
2	142.82	26.54	0.71	8.21	35.46	40.00	-4.54	QP
3	179.39	25.58	0.89	9.64	36.11	40.00	-3.89	QP
4	295.15	21.80	1.08	12.97	35.85	47.00	-11.15	QP
5	382.59	19.10	1.13	14.65	34.88	47.00	-12.12	QP
6	593.05	16.96	1.51	18.32	36.79	47.00	-10.21	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the official limit are not reported

<b>Model No.</b>	40251	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.3°C, 56.8% RH	<b>Test Engineer</b>	Davey Xu
<b>Pol</b>	Horizontal	<b>Testing Voltage</b>	110V

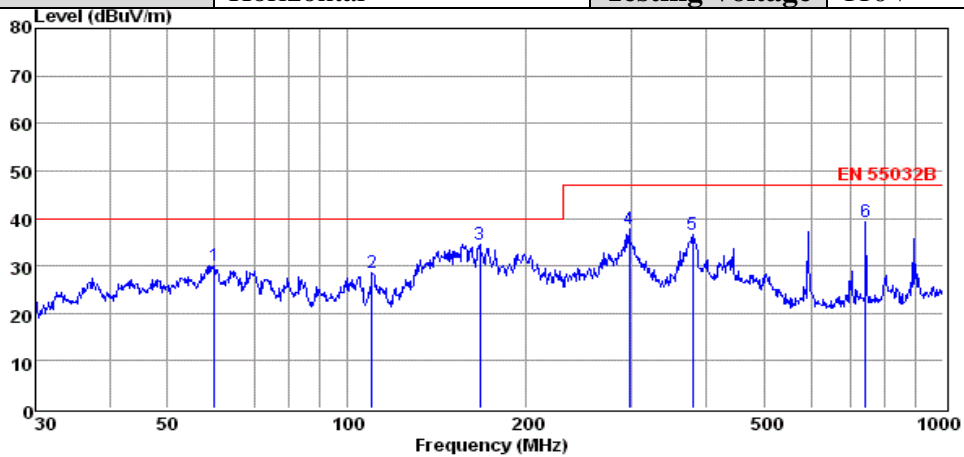


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	59.86	16.89	0.49	12.70	30.08	40.00	-9.92	QP
2	110.18	15.80	0.61	12.22	28.63	40.00	-11.37	QP
3	167.24	24.87	0.77	8.89	34.53	40.00	-5.47	QP
4	297.22	23.56	1.12	13.01	37.69	47.00	-9.31	QP
5	379.91	20.86	1.18	14.59	36.63	47.00	-10.37	QP
6	742.26	18.24	1.78	19.34	39.36	47.00	-7.64	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the official limit are not reported

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

## 6. HARMONIC CURRENT EMISSION MEASUREMENT

### 6.1. Block Diagram of Test Setup

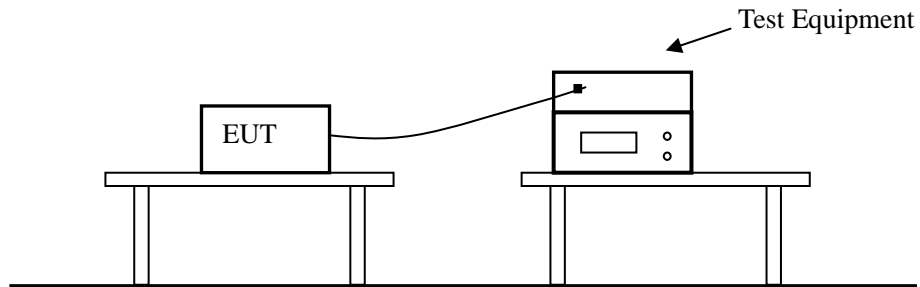

### 6.2. Test Standard

EN 61000-3-2: 2014

### 6.3. Operation Condition of EUT

Same as Section 4.4, except the test setup replaced as Section 6.1.

### 6.4. Test Results


**PASS.**

Because power of EUT less than 75W. According standard EN 61000-3-2,

Harmonic current isn't required.

## 7. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

### 7.1. Block Diagram of Test Setup

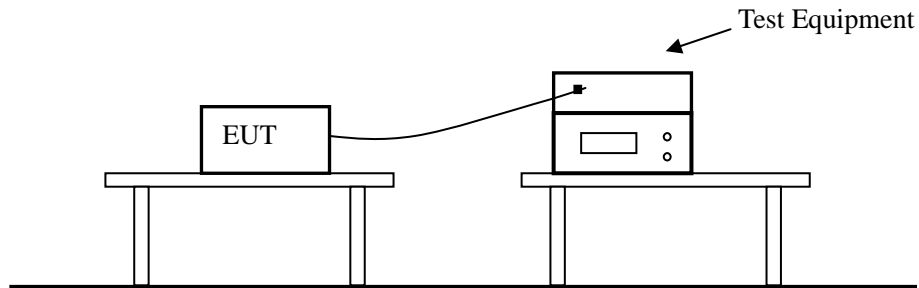

### 7.2. Measuring Standard

EN 61000-3-3: 2013

### 7.3. Operation Condition of EUT

Same as Section 4.4, except the test setup replaced as Section 7.1.


### 7.4. Test Results

**PASS.**

<b>Model No.</b>	40251	<b>Test Engineer</b>	Davey Xu	
Overall Result: <b>PASS</b>	Notes: Measurement method - Voltage			
	Pst	dc (%)	dmax (%)	d(t) > 3.3%(ms)
Limit	1.000	3.300	4.000	500
Reading 1	0.268	0.046	0.583	0

## 8. ELECTROSTATIC DISCHARGE IMMUNITY TEST

### 8.1. Block Diagram of Test Setup

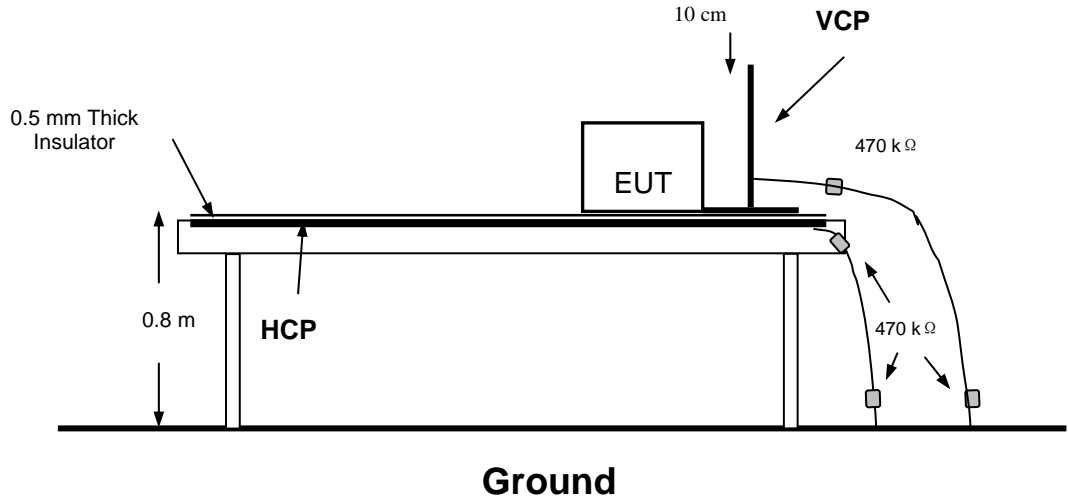

### 8.2. Test Standard

EN 55024: 2010 (EN 61000-4-2: 2009, Severity Level: 3 / Air Discharge:  $\pm 8\text{KV}$ , Level: 2 / Contact Discharge:  $\pm 4\text{KV}$ )

### 8.3. Severity Levels and Performance Criterion

#### 8.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	$\pm 2$	$\pm 2$
2.	$\pm 4$	$\pm 4$
3.	$\pm 6$	$\pm 8$
4.	$\pm 8$	$\pm 15$
X	Special	Special

#### 8.3.2. Performance Criterion: B

### 8.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.7.

### 8.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 4.4. Except the test set up replaced by Section 8.1.

## 8.6. Test Procedure

### 8.6.1. Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

### 8.6.2. Contact Discharge

All the procedure shall be same as Section 8.6.1. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

### 8.6.3. Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

### 8.6.4. Indirect Discharge For Vertical Coupling Plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

## 8.7. Test Results

**PASS.**

Please refer to the following pages

# Electrostatic Discharge Test Results

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
<b>Applicant</b>	Ugreen Group Limited		
<b>EUT</b>	HDMI Switch	<b>Temperature</b>	23.2°C
<b>M/N</b>	40251	<b>Humidity</b>	56.7%
<b>Criterion</b>	B	<b>Pressure</b>	1021mbar
<b>Test Mode</b>	Mode 1	<b>Test Engineer</b>	Davey Xu

Air Discharge						
Test Points	Test Levels			Results		
	± 2KV	± 4KV	± 8KV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B


Contact Discharge					
Test Points	Test Levels		Results		
	± 2 kV	±4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Discharge To Horizontal Coupling Plane					
Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Discharge To Vertical Coupling Plane					
Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

## 9. RF FIELD STRENGTH SUSCEPTIBILITY TEST

### 9.1. Block Diagram of Test

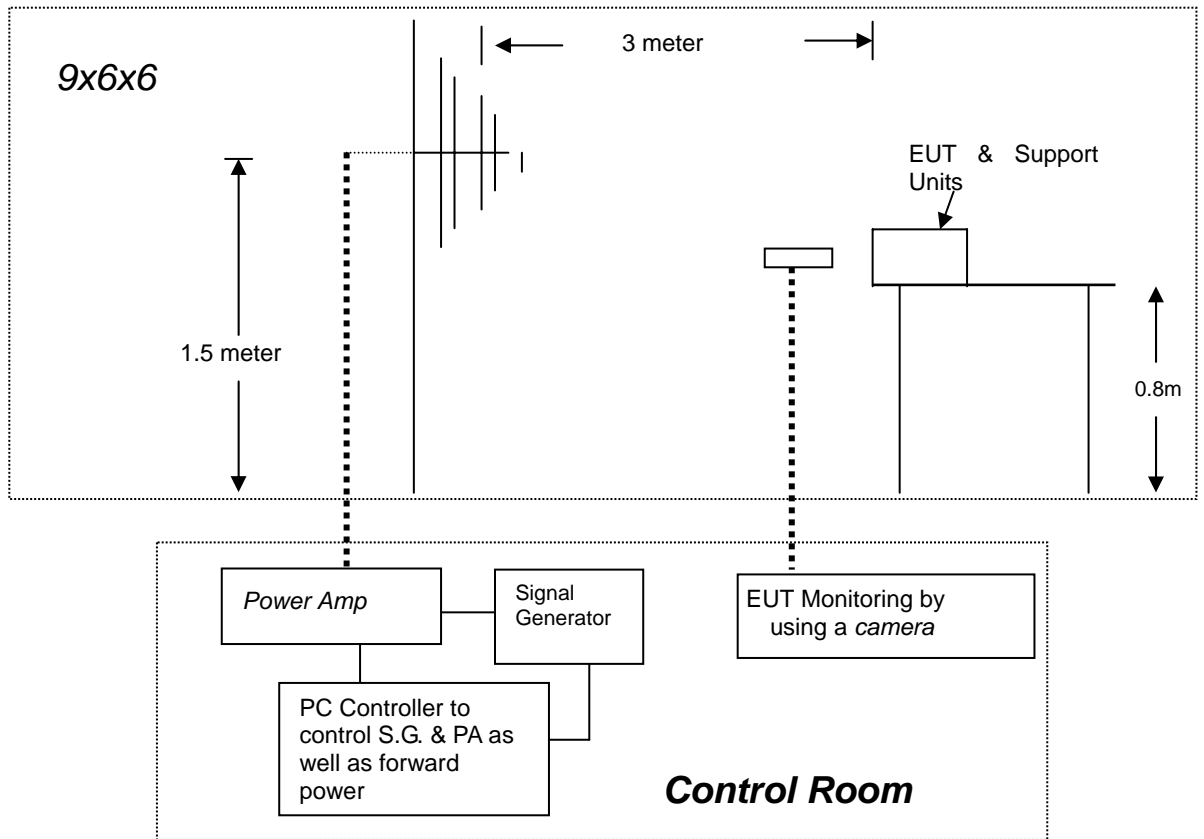

### 9.2. Test Standard

EN 55024: 2010 (EN 61000-4-3: 2006+A1: 2010 Severity Level: 2, 3V / m)

### 9.3. Severity Levels and Performance Criterion

#### 9.3.1. Severity Levels

Level	Field Strength (V/m)
1.	1
2.	3
3.	10
X.	Special

#### 9.3.2. Performance Criterion: A

#### 9.4.EUT Configuration on Test

The configuration of the EUT is same as Section 3.8.

#### 9.5.Operating Condition of EUT

Same as radiated emission measurement, which is listed in Section 5.5, except the test setup replaced as Section 9.1.

#### 9.6.Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD Recording is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
-----	-----
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
5. Dwell Time	3 Sec.

#### 9.7.Test Results

**PASS.**

Please refer to the following page.

## RF Field Strength Susceptibility Test Results

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-3 <input checked="" type="checkbox"/> EN 61000-4-3		
<b>Applicant</b>	Ugreen Group Limited		
<b>EUT</b>	HDMI Switch	<b>Temperature</b>	24.3°C
<b>M/N</b>	40251	<b>Humidity</b>	56.8%
<b>Field Strength</b>	3 V/m	<b>Criterion</b>	A
<b>Test Mode</b>	Mode 1	<b>Test Engineer</b>	Davey Xu
<b>Frequency Range</b>	80 MHz to 1000 MHz		
<b>Modulation</b>	<input type="checkbox"/> None <input type="checkbox"/> Pulse <input checked="" type="checkbox"/> AM 1KHz 80%		
<b>Steps</b>	1%		

	Horizontal	Vertical
<b>Front</b>	PASS	PASS
<b>Right</b>	PASS	PASS
<b>Rear</b>	PASS	PASS
<b>Left</b>	PASS	PASS


**Test Equipment:**

1. Signal Generator: 2031 (MARCONI)
2. Power Amplifier: 500A100 & 100W/1000M1 (A&R)
3. Power Antenna: 3108 (EMCO) & AT1080 (A&R)
4. Field Monitor: FM2000 (A&R)

Note:

## 10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

### 10.1. Block Diagram of Test Setup

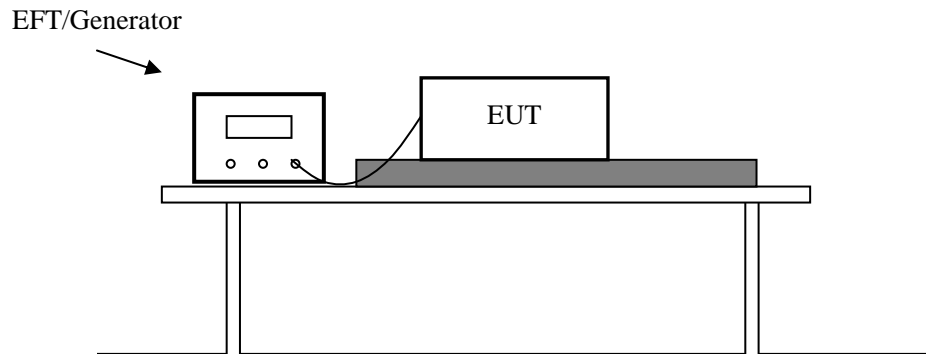

### 10.2. Test Standard

EN 55024: 2010 (EN 61000-4-4: 2004+A1: 2010, Severity Level, Level 2: 1KV)

### 10.3. Severity Levels and Performance Criterion

#### 10.3.1. Severity level

Level	Open Circuit Output Test Voltage $\pm 10\%$	
	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

#### 10.3.2. Performance Criterion: B

### 10.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.9.

### 10.5. Operating Condition of EUT

10.5.1. Setup the EUT as shown in Section 10.1.

10.5.2. Turn on the power of all equipments.

10.5.3. Let the EUT work in test mode (ON) and measure it.

## 10.6. Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

10.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

10.6.2. For signal lines and control lines ports: No I/O ports. It's unnecessary to test.

10.6.3. For DC output line ports: It's unnecessary to test.

## 10.7. Test Results

**PASS.**

Please refer to the following page.

## Electrical Fast Transient/Burst Test Results


<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
<b>Applicant</b>	Ugreen Group Limited		
<b>EUT</b>	HDMI Switch	<b>Temperature</b>	24°C
<b>M/N</b>	40251	<b>Humidity</b>	57.3%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	B
<b>Test Engineer</b>	Davey Xu		

Line	Test Voltage	Result (+)	Result (-)
L	1KV	PASS	PASS
N	1KV	PASS	PASS
PE			
L-N	1KV	PASS	PASS
L-PE			
N-PE			
L-N-PE			
Signal Line			
I/O Cable			

Note:

## 11. SURGE IMMUNITY TEST

### 11.1. Block Diagram of Test Setup

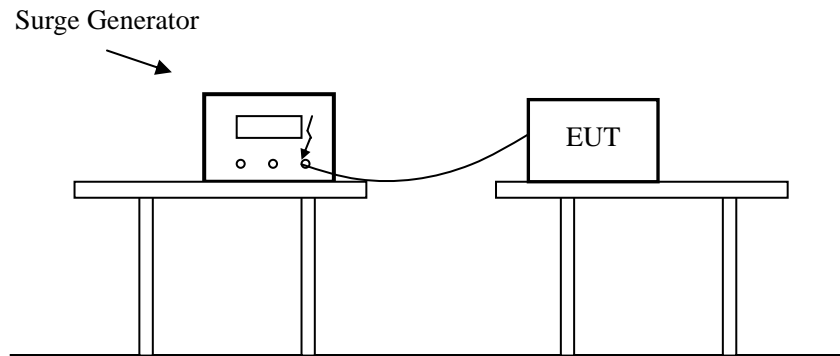

### 11.2. Test Standard

EN 55024: 2010 (EN 61000-4-5: 2014, Severity Level: Line to Line: Level 2, 1.0KV, Line to Earth: Level 3, 2.0KV)

### 11.3. Severity Levels and Performance Criterion

#### 11.3.1. Severity level

Severity Level	Open-Circuit Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

#### 11.3.2. Performance Criterion: B

### 11.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.10.

### 11.5. Operating Condition of EUT

11.5.1. Setup the EUT as shown in Section 11.1.

11.5.2. Turn on the power of all equipments.

11.5.3. Let the EUT work in test mode (ON) and measure it.

## 11.6. Test Procedure

11.6.1. Set up the EUT and test generator as shown on Section 11.1.

11.6.2. For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

11.6.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

11.6.4. Different phase angles are done individually.

11.6.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

## 11.7. Test Results

**PASS.**

Please refer to the following page.


## Surge Immunity Test Result

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
<b>Applicant</b>	Ugreen Group Limited		
<b>EUT</b>	HDMI Switch	<b>Temperature</b>	24°C
<b>M/N</b>	40251	<b>Humidity</b>	57.3%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	B
<b>Test Engineer</b>	Davey Xu		

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result
L-N	+	0°	5	1.0	PASS
	+	90°	5	1.0	PASS
	+	180°	5	1.0	PASS
	+	270°	5	1.0	PASS
	-	0°	5	1.0	PASS
	-	90°	5	1.0	PASS
	-	180°	5	1.0	PASS
	-	270°	5	1.0	PASS
L-PE					
N-PE					
Signal Line					
Note					

## 12. INJECTED CURRENTS SUSCEPTIBILITY TEST

### 12.1. Block Diagram of Test Setup

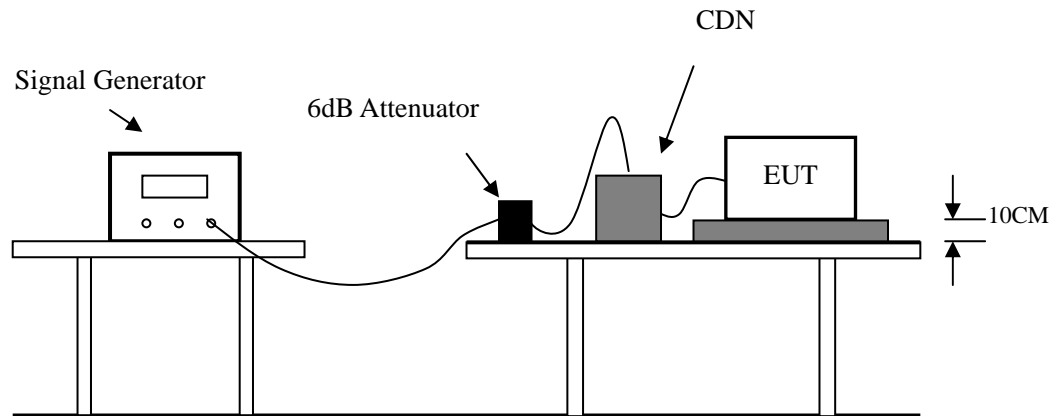

### 12.2. Test Standard

EN 55024: 2010(EN 61000-4-6: 2014, Severity Level: Level 2, 3V (rms), (0.15MHz ~ 80MHz))

### 12.3. Severity Levels and Performance Criterion

#### 12.3.1. Severity level

Level	Field Strength (V)
1	1
2	3
3	10
X	Special

#### 12.3.2. Performance Criterion: A

### 12.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.11.

### 12.5. Operating Condition of EUT

12.5.1. Setup the EUT as shown in Section 12.1.

12.5.2. Turn on the power of all equipments.

12.5.3. Let the EUT work in test mode (ON) and measure it.

## 12.6. Test Procedure

- 12.6.1. Set up the EUT, CDN and test generators as shown on Section 12.1.
- 12.6.2. Let the EUT work in test mode and measure it.
- 12.6.3. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 12.6.4. The disturbance signal described below is injected to EUT through CDN.
- 12.6.5. The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 12.6.6. The frequency range is swept from 150kHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 12.6.7. The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 12.6.8. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

## 12.7. Test Results

**PASS.**

Please refer to the following page.

## Injected Currents Susceptibility Test Results

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
<b>Applicant</b>	Ugreen Group Limited		
<b>EUT</b>	HDMI Switch	<b>Temperature</b>	24.4℃
<b>M/N</b>	40251	<b>Humidity</b>	56%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	A
<b>Test Engineer</b>	Davey Xu		

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 80	AC Mains	3V	A	PASS


## Remark:

1. Modulation Signal:1kHz 80% AM
2. Measurement Equipment :
  - Simulator: CIT-10 (FRANKONIA)
  - CDN : CDN-M2 (FRANKONIA)
  - CDN-M3 (FRANKONIA)

## Note:

## 13. MAGNETIC FIELD SUSCEPTIBILITY TEST

### 13.1. Block Diagram of Test Setup

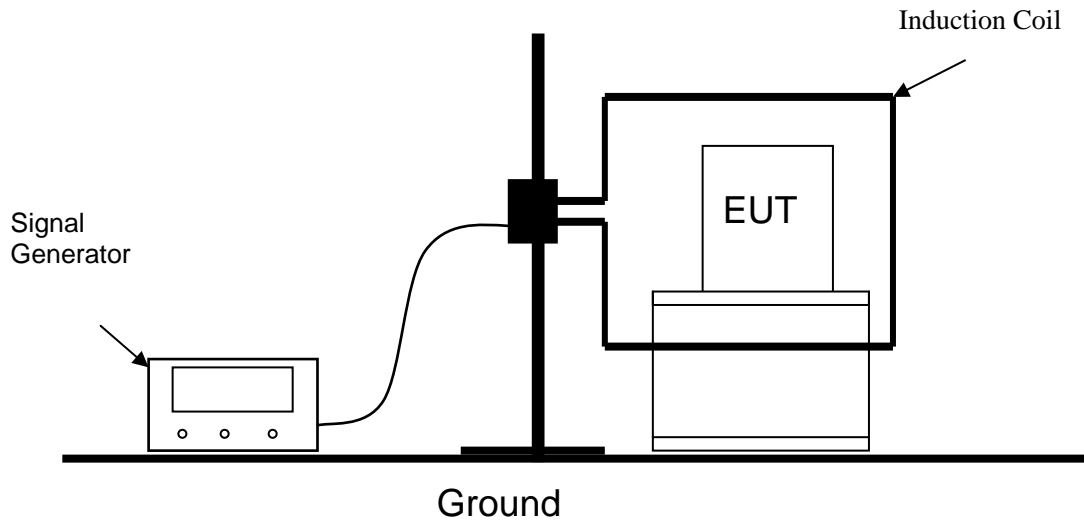

### 13.2. Test Standard

EN 55024: 2010 (EN 61000-4-8: 2010, Severity Level: Level 1, 1A / m)

### 13.3. Severity Levels and Performance Criterion

#### 13.3.1. Severity Levels

Level	Field Strength (A/m)
1	1
2	3
3	10
4	30
5	100
X	Special

#### 13.3.2. Performance Criterion: A

### 13.4. EUT Configuration on Test

The configuration of the EUT is same as Section 3.12.

### 13.5. Test Procedure

The EUT is placed in the middle of a induction coil (1\*1m), under which is a 1\*1\*0.1m (high) table, this small table is also placed on a larger table, 0.8 m above the ground. Both horizontal and vertical polarization of the induction coil is set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

### 13.6. Test Results

**PASS.**

Please refer to the following page.

## Magnetic Field Immunity Test Result


<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-8 <input checked="" type="checkbox"/> EN 61000-4-8		
<b>Applicant</b>	Ugreen Group Limited		
<b>EUT</b>	HDMI Switch	<b>Temperature</b>	24°C
<b>M/N</b>	40251	<b>Humidity</b>	57.3%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	A
<b>Test Engineer</b>	Davey Xu		

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
1	5 mins	X	A	PASS
1	5 mins	Y	A	PASS
1	5 mins	Z	A	PASS

Note:

## 14. VOLTAGE DIPS AND INTERRUPTIONS TEST

### 14.1. Block Diagram of Test Setup

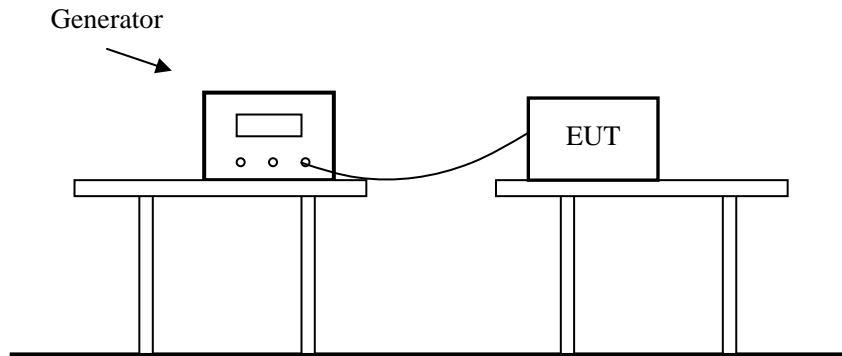

### 14.2. Test Standard

EN 55024: 2010 (EN 61000-4-11: 2004)

### 14.3. Severity Levels and Performance Criterion

#### 14.3.1. Severity level

Test Level (% UT)	Voltage dip and short interruptions (% UT)	Duration (in period)
0	100	0.5
70	30	25
0	100	250

#### 14.3.2. Performance Criterion: B&C

### 14.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.13&3.14.

### 14.5. Operating Condition of EUT

14.5.1. Setup the EUT as shown in Section 14.1.

14.5.2. Turn on the power of all equipments.

14.5.3. Let the EUT work in test mode (ON) and measure it.

## 14.6. Test Procedure

14.6.1. Set up the EUT and test generator as shown on Section 14.1.

14.6.2. The interruptions are introduced at selected phase angles with specified duration.

14.6.3. Record any degradation of performance.

## 14.7. Test Results

**PASS.**

Please refer to the following page.

## Voltage Dips And Interruptions Test Results


<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
<b>Applicant</b>	Ugreen Group Limited		
<b>EUT</b>	HDMI Switch	<b>Temperature</b>	24°C
<b>M/N</b>	40251	<b>Humidity</b>	57.3%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	B&C
<b>Test Engineer</b>	Davey Xu		

Test Level % U <sub>T</sub>	Voltage Dips & Short Interruptions % U <sub>T</sub>	Duration (in periods)	Criterion	Result
0	100	0.5P	B	PASS
70	30	25P	C	PASS
0	100	250P	C	PASS


Note:

## 15. PHOTOGRAPH

### 15.1. Photo of Power Line Conducted Measurement

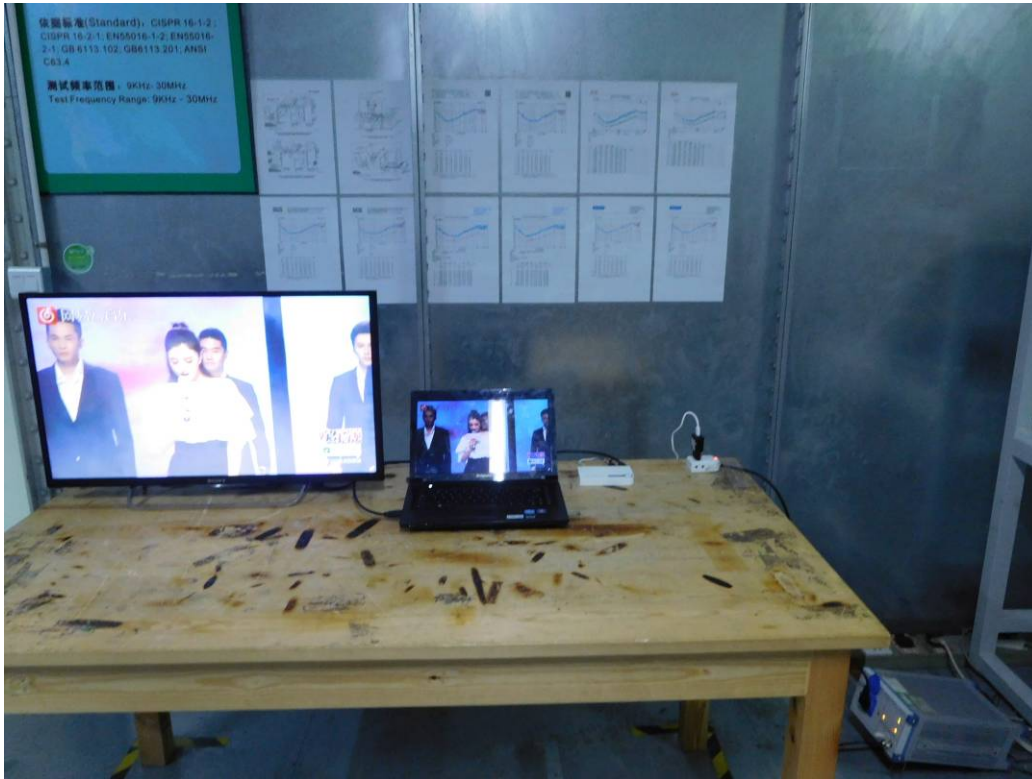

### 15.2. Photo of Radiated Measurement

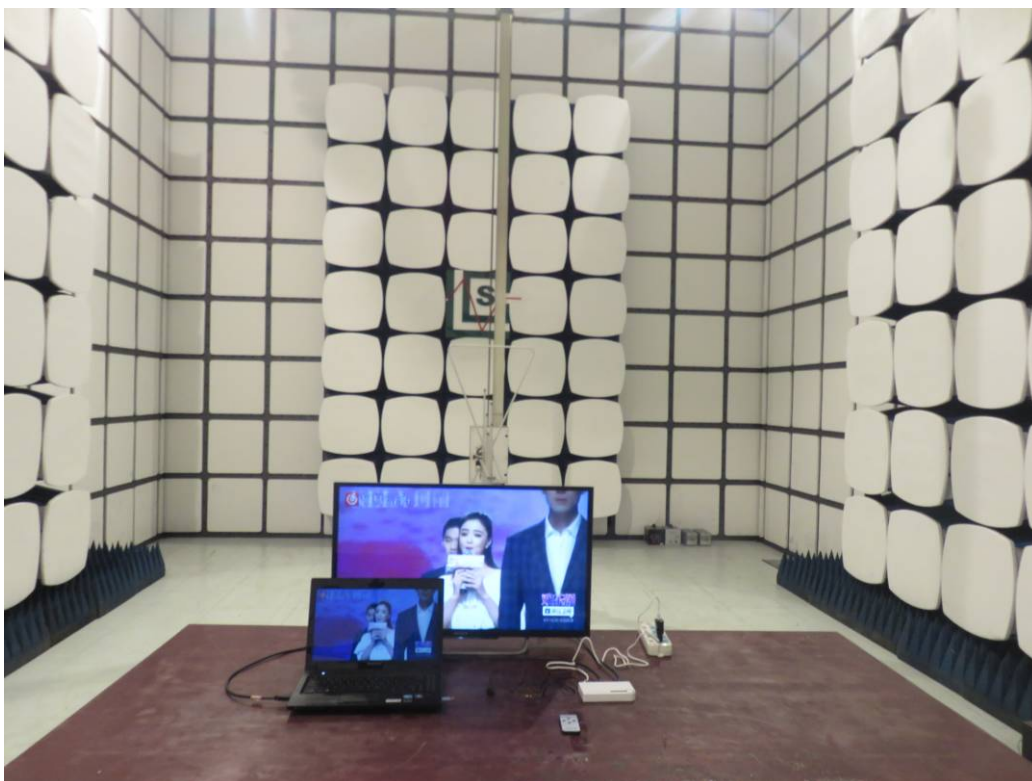

### 15.3. Photo of Harmonic & Flicker Measurement




### 15.4. Photo of Electrostatic Discharge Test



### 15.5. Photo of Electrical Fast Transient/Burst Test




### 15.6. Photo of Surge Test

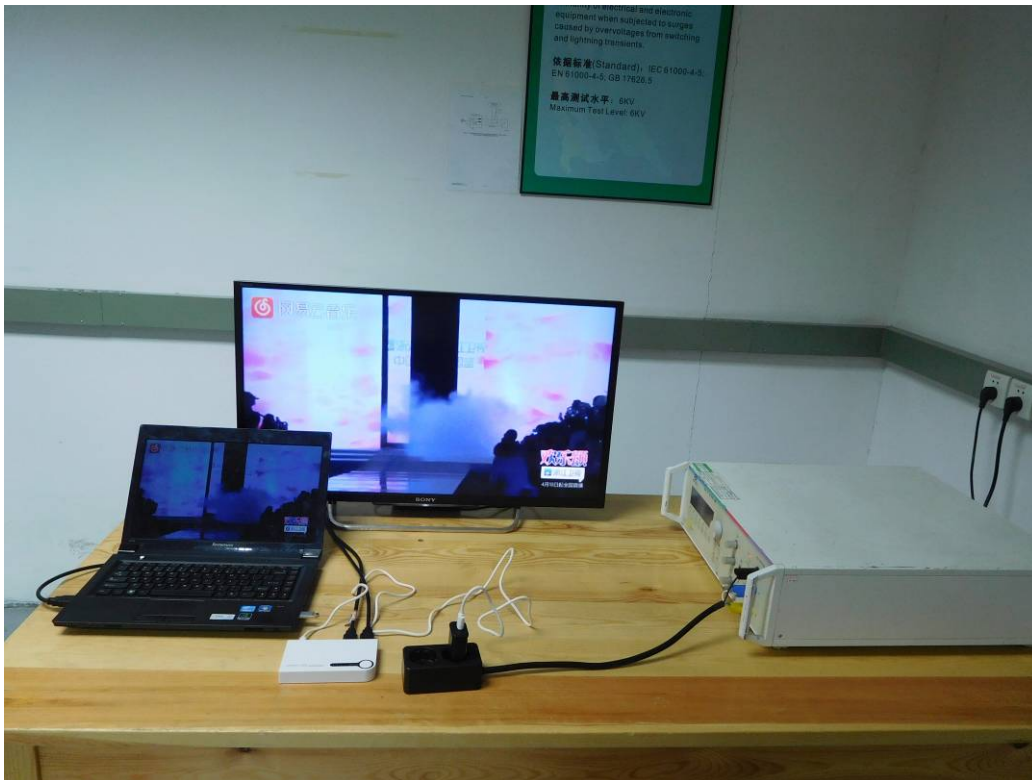


### 15.7.Photo of Injected Currents Susceptibility Test



### 15.8.Photo of Magnetic Field Immunity Test

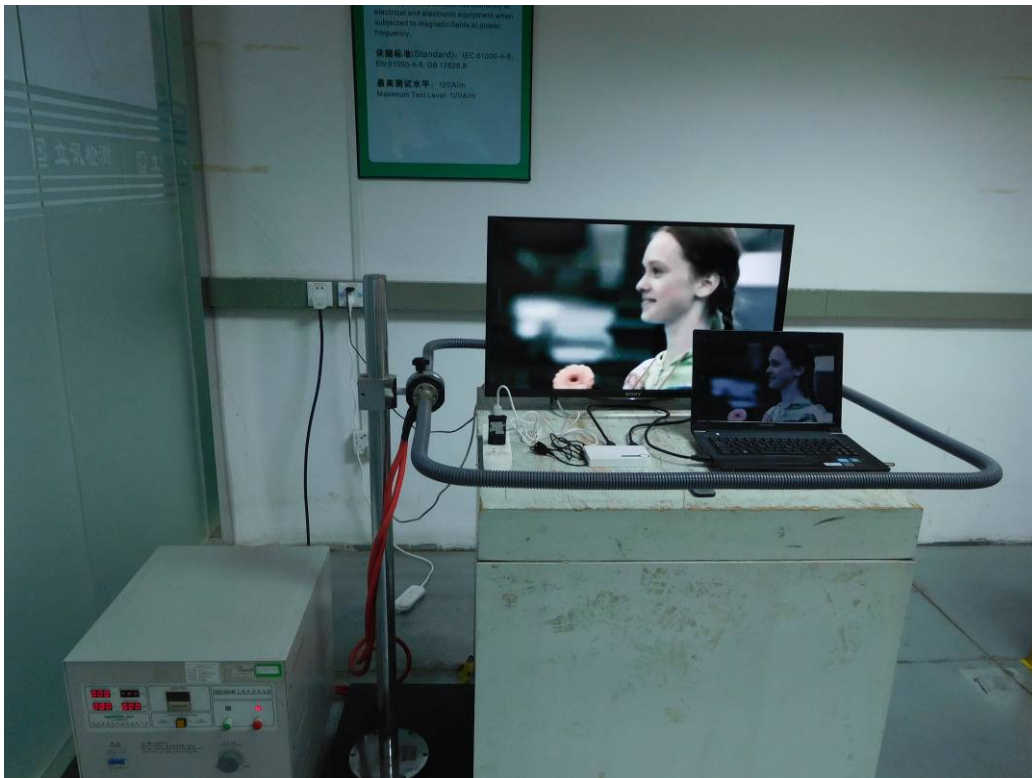

### 15.9.Photo of Voltage Dips and Interruptions Test

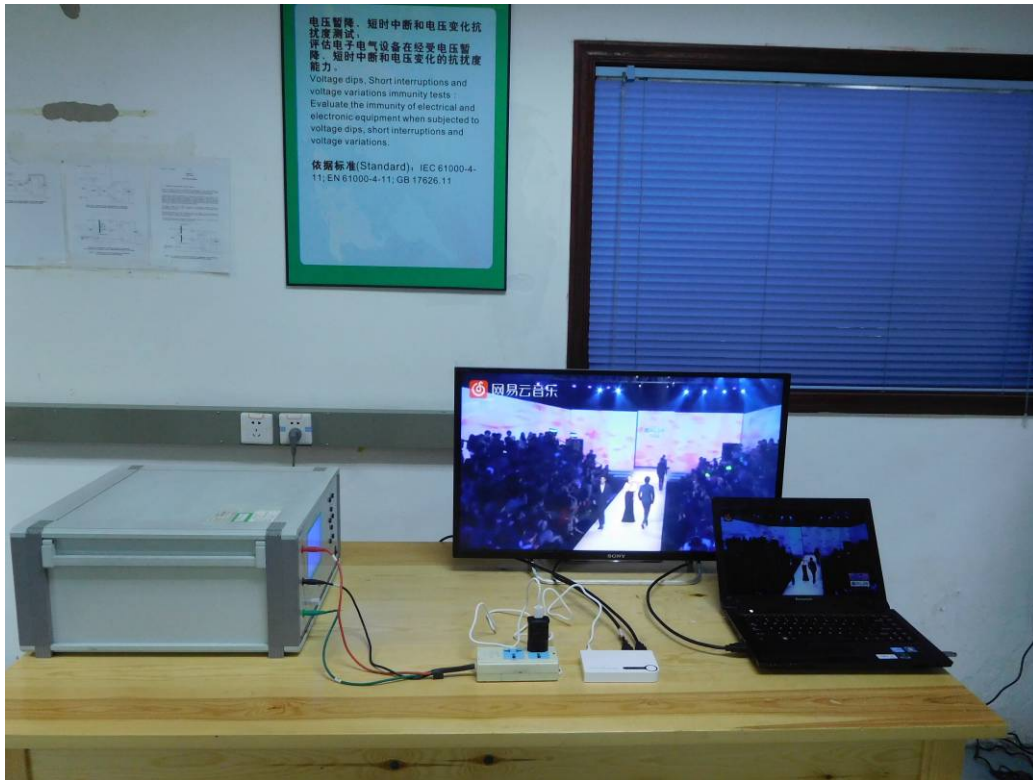

## 16. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig. 1

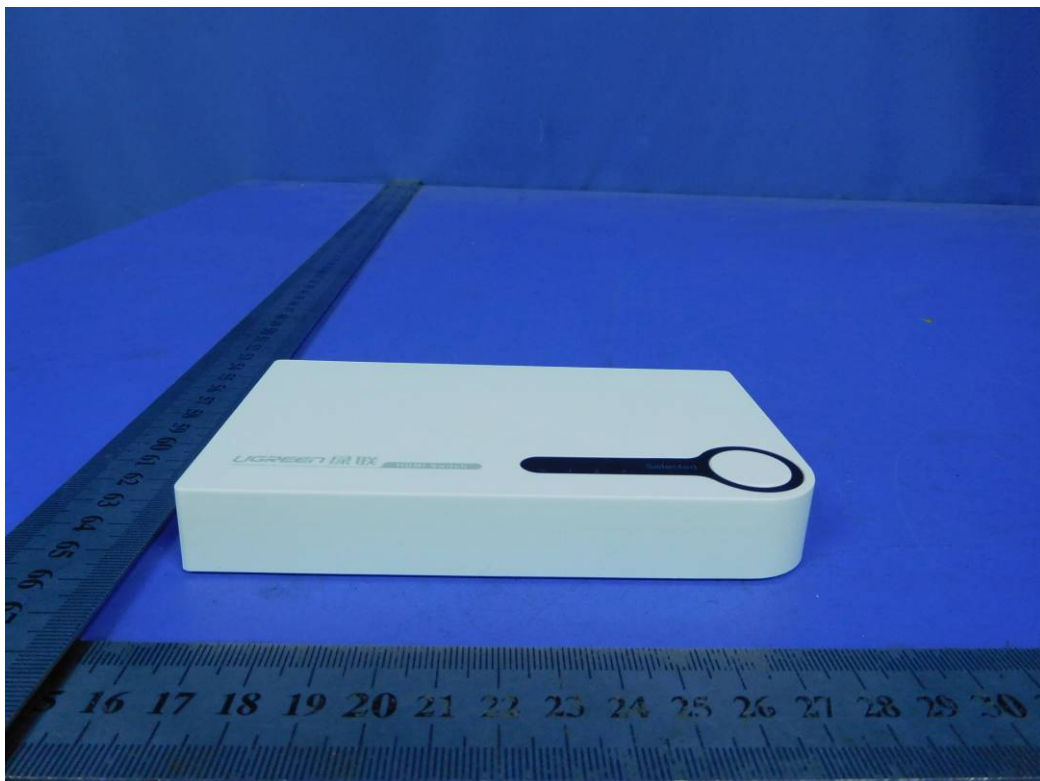


Fig. 2



Fig. 3

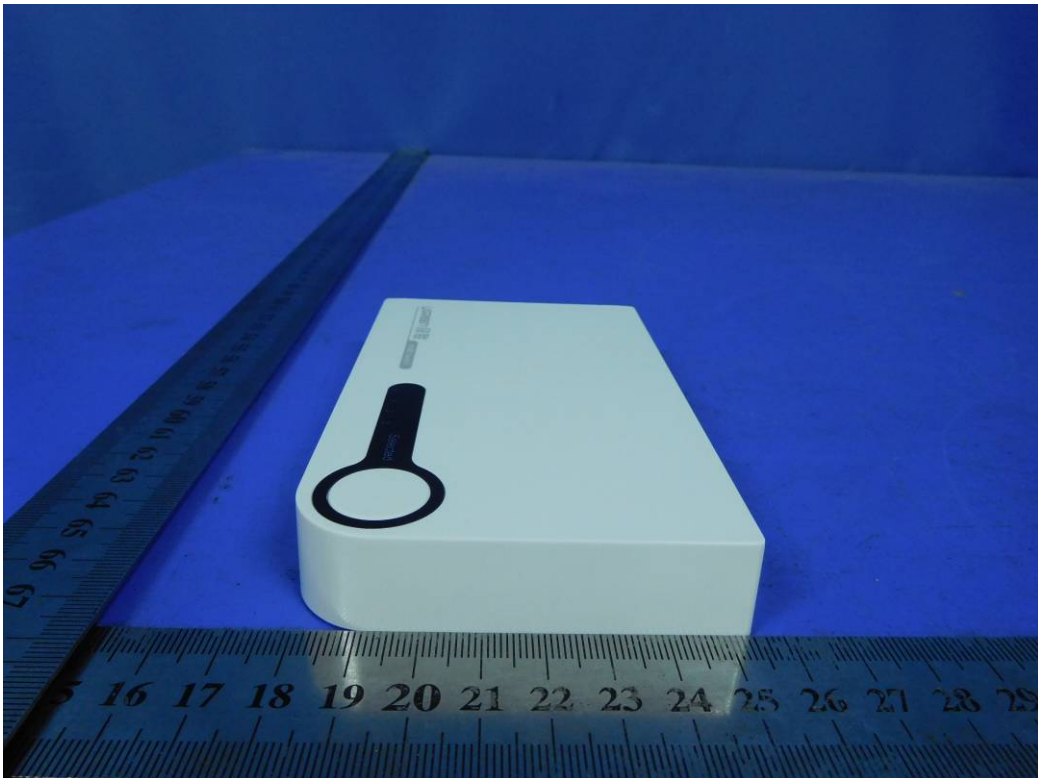


Fig. 4

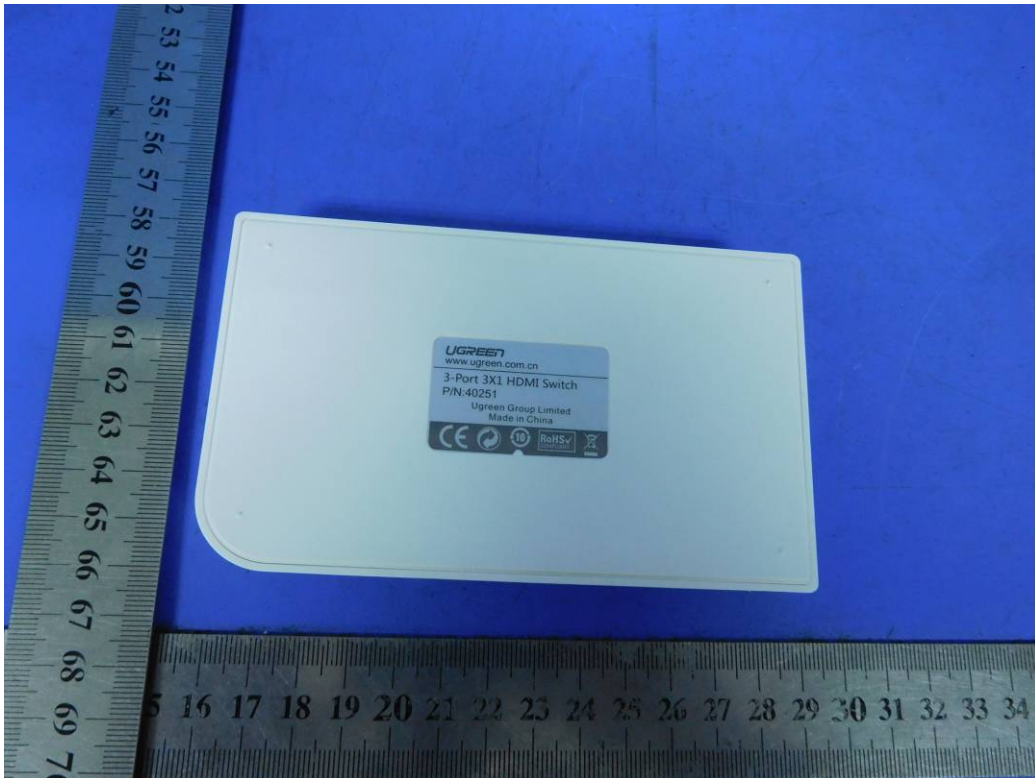


Fig. 5



Fig. 6

-----THE END OF TEST REPORT-----