



52321
Bumper Mount
Grill Bracket



Remove all items from package and verify that all parts are there. Please do not return to point of purchase. We will be happy to provide any missing or defective parts.

Assembly:

Step 1


Remove 2 'U' bolts from package along with the 4 matching nuts and flat washers.

Place base assembly on top of the bumper near the right end and thread the two 'U' bolts from the bottom of the bumper up through the holes in the base. Add a steel washer and a nut on each end of each 'U' bolt. Tighten the 'U' bolts into place.

Step 2

Insert the 4 1/4" bolt through the top flange of the grill mounting plate, the top nylon washer, the swing arm the bottom nylon washer and the bottom flange of the grill mounting plate.

Add the self locking nut to the threads at the bottom of the bolt and tighten.

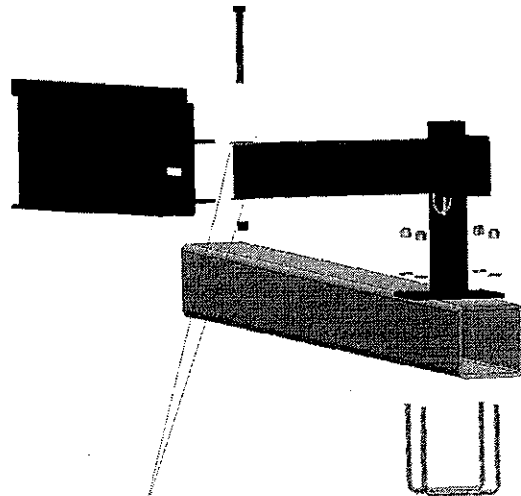

Nylon Washers



Side View


Use:

A lynch pin is provided to lock the arm at a safe distance from the coach.

Insert the lynch pin in the location shown at the right to keep the swing arm from moving back towards the coach.

Stowing:

Remove the grill and move the swing arm back against the stationary arm. Insert the lynch pin into the hole of the tab protruding through the slot in the grill mounting plate.

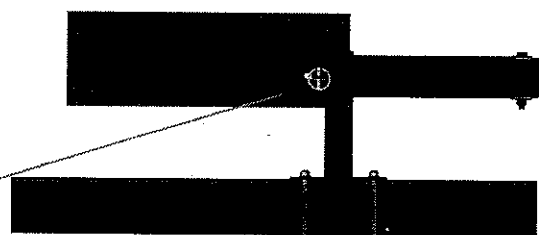

Rear View

Bumper

WARNINGS:

Do not cook with the grill in the stowed position.

Do not travel with the bumper mount NOT in the stowed position.

Do not travel with the grill attached to the grill mounting plate.

Do not allow the bumper mount arm to extend beyond the end of the bumper when stowed.