



Desktop DIMM Installation


Note: Never apply pressure or handle the memory module on or around the Integrated Circuit (IC)! Always handle memory with both hands positioned at the upper-most corners of the Printed Circuit Board (PCB).

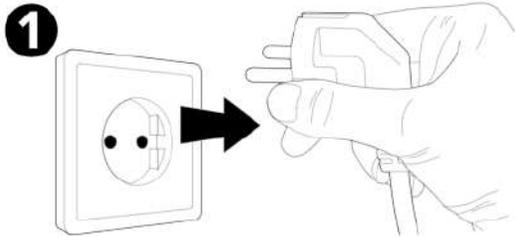


1 Disconnect the AC power cord and remove the computer cover.

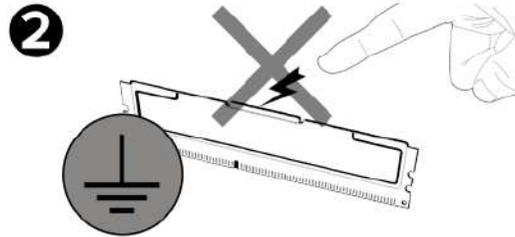


2 Prior to handling the memory module(s), always touch an unpainted and grounded metal object or use a grounded antistatic wrist strap to prevent electrostatic discharge (ESD).

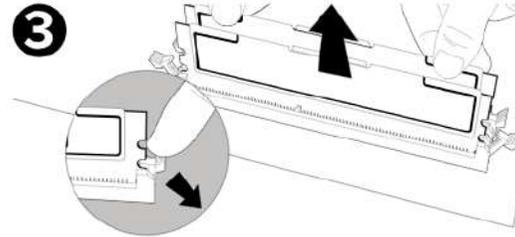


3 If necessary, remove pre-existing memory by pressing down on the lock/ejector tabs. The tabs are located at both ends of the memory socket.

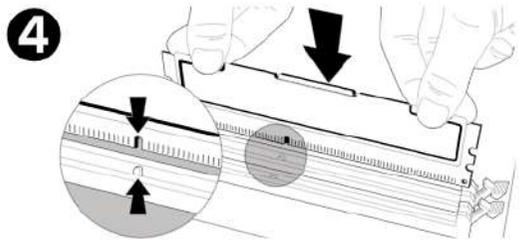

4 Align the memory module key(s) along with the memory socket keys(s) for proper installation.

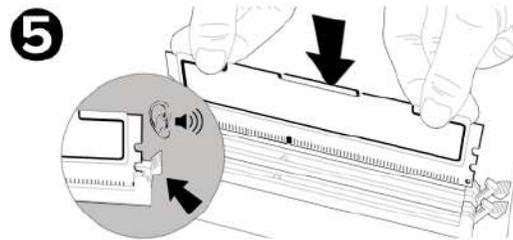


5 Press the memory into the socket until the tabs snap into place and secure the memory module.

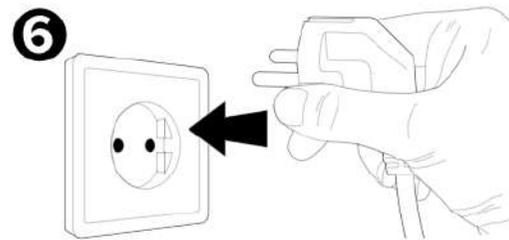


6 Replace the computer cover and plug in the AC power cord.

Notebook SO-DIMM Installation


Note: Never apply pressure or handle the memory module on or around the Integrated Circuit (IC)! Always handle memory with both hands positioned at the upper-most corners of the Printed Circuit Board (PCB).

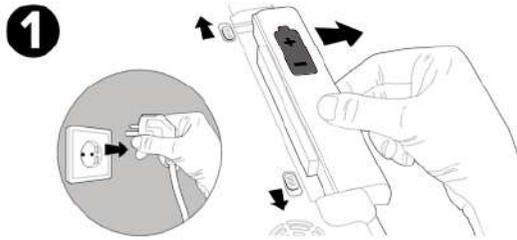


1 Disconnect the AC power cord and remove the battery.

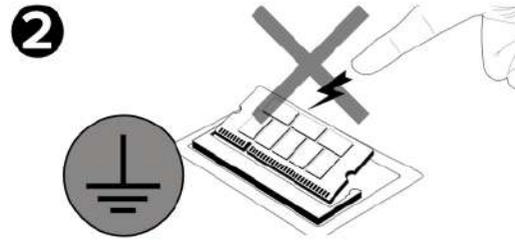


2 Prior to handling the memory module(s), always touch an unpainted and grounded metal object or use a grounded antistatic wrist strap to prevent electrostatic discharge (ESD).

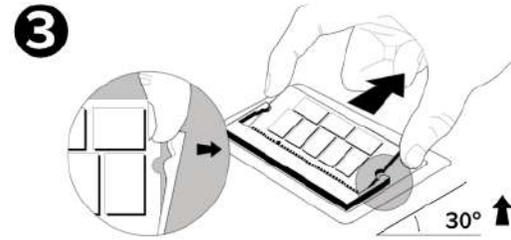


3 If necessary, remove pre-existing memory by gently pulling the lock/ejector tabs (located on both sides of the memory socket) away from the memory module. The memory will unlock and pop-up 30 degrees for removal.

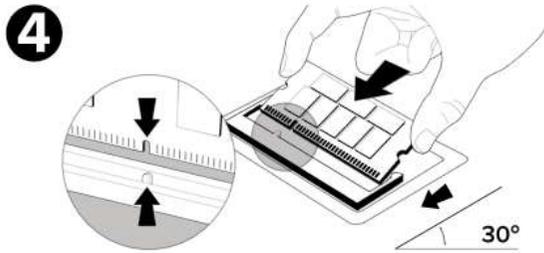

4 Align the memory module key along with the memory socket key and insert the memory at a 30 degree angle.

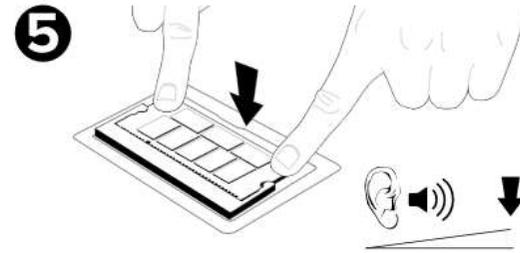

5 Rotate the memory downward until the lock/ejector tabs engage and click into place.

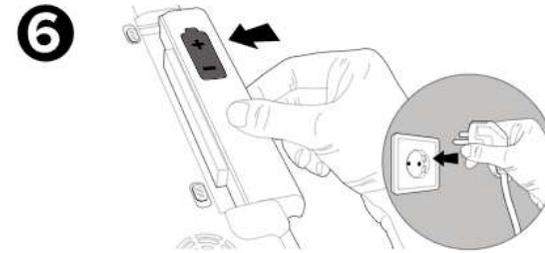

6 Replace the battery and plug in the AC power cord.