

Products Specification

Products Name:TD-8135MG Digital Products No.

No.	Item	Specification
1.1	Storage Temperature Range	-30° C~80° C
1.2	Operating Temperature Range	-25° C~70° C

2. Standard Test Environment

No.	Item	Specification
2.1	Temperature Range	-25° C~70° C
2.2	Humidity Range	65%±10%

3. Mechanical Specification

No.	Item	Specification
3.1	Size	40.0*20.5*40.5mm
3.2	Weight	56g±5%
3.3	Gear type	5 Metal
3.4	Limit angle	360°
3.5	Bearing	2BB
3.6	Horn gear spline	25T Diameter:6.0mm High4.0mm
3.7	Horn type	Plastic, POM
3.8	Case	Engineering plastics(PBT)+Aluminum alloy
3.9	Connector wire	320mm±5mm
3.10	Motor	Carbon brush motor
3.11	Splash water resistance	yes


4. Electrical Specification

No.	Operat voltage	4.8V	8.4V
4.1	Idle current	mA	mA
4.2	No load speed	0.32sec/60°	0.22sec/60°
4.3	Runnig current	140mA	200mA
4.4	Peak stall torque	32.7kg.cm	35.2kg.cm
4.5	Stall current	2800mA±10%	3800mA±10%
4.6	Working voltage range	4.8-8.4V	

5. Control Specification

No.	Item	Specification
5.1	Command signal	Pulse width modification
5.2	Amplifier type	Digital controller
5.3	Pulse width range	500~2500usec
5.4	Neutral position	1500usec
5.5	Running degree	180° ±3° (when 500~2500usec)
5.6	Dead band width	5 usec
5.7	Rotating direction	Counterclockwise (when 1000~2000usec)

6.The Drawings:

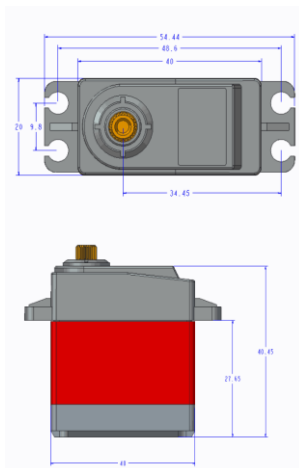

The Wire and plug:

