


Name and function of each part

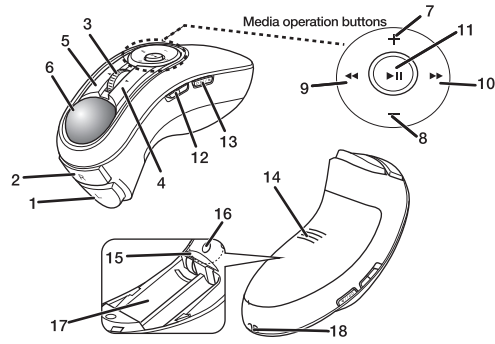

- 1 Left button
- 2 Right button
- 3 Wheel/Power indicator light
The LED blinks red when the battery level is low.
- 4 "Back" button
Operates the "Back" button on the Web browser.
- 5 "Forward" button
Operates the "Forward" button on the Web browser.
- 6 Trackball
Rotate using your fingertips to move the cursor.
- 7 Volume up
- 8 Volume down
- 9 Previous track
- 10 Next track
- 11 Play/pause


- 12 Power Switch
- 13 Pointer speed change button/
Pairing button
Each time the button is pressed, the count number (movement speed of the cursor) switches between three stages.
When the count number is changed, the current count number is shown by the number of times the LED light blinks.
one blink 500 dpi
two blinks 1000 dpi
three blinks 1500 dpi
Pair the mouse with your device's Bluetooth® module or a Bluetooth® adapter.

- 14 Battery cover
- 15 Optical sensor (reverse side of ball)
- 16 Ball removal hole
Remove the ball to clean the inside of the compartment.
- 17 Battery-storage compartment
- 18 Strap hole

MouseAssistant


Win <https://www.elecom.co.jp/r/132.html>
Mac <https://www.elecom.co.jp/r/133.html>
Download "ELECOM Mouse Assistant" from the ELECOM website to use its button assignment and high-speed scrolling functions.
* Windows® RT 8.1 and Android are not supported by the "ELECOM Mouse Assistant".

1 Insert the batteries

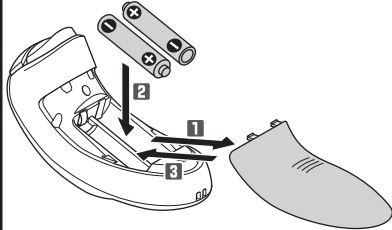

- 1 Remove the battery cover.
- 2 Insert the batteries as instructed.
 Insert with the correct battery plus and minus orientation.
- 3 Re-attach the battery cover to its original state.

2 Turning the Power On



- 1 Slide the power switch on the side of the product to the ON position.
Slide the switch to the left to reveal the blue indicator.
The power indicator light will light up red for a period of time.
* When remaining battery is low, the LED blinks red for a fixed time.
 Power-saving mode
When the mouse is left untouched for a fixed period of time while the power is ON, it automatically shifts to power-saving mode. The mouse is released from the power-saving mode when it is touched.
* Mouse operation may be unstable for a few seconds after returning from the power-saving mode.

3 Pairing with a PC

Pairing involves registering Bluetooth® devices (in this case, this product and your device) with each other, and authorising a connection between them.
This section covers Windows® and Macintosh standard Bluetooth functions. Depending on your device or Bluetooth® adaptor, unique Bluetooth® functions may be used. Please read the respective manuals for each function. Please carry out the pairing operation using your current mouse or touchpad on your device.

Windows® 10

If your computer does not support Bluetooth® 4.0 or if you have upgraded from Windows® 8.1 or Windows® 7, please use a Bluetooth® adaptor compatible with Bluetooth® 4.0

- 1 Click on the "Start" button on the lower left of the screen, and click on the "Settings" icon.



Click on "Devices" on the "Windows Settings" screen.

- 2 Click on "Devices".
The "Devices" page will appear.




- 3 Click on "Bluetooth & other devices", and click on "Add Bluetooth or other device".



- 4 Click "Bluetooth".



- 5 When the "Add a device" page appears, hold down the pairing button on the side of the product for around 5 seconds, and then release.
The product will be in pairing mode and the battery indicator light will blink red.



- 6 Click "ELECOM Relacon".
Start pairing.



- 7 When it changes to "Connected", click on "Done".



- 8 This product is added to "Mouse, keyboard, & pen", displays "Connected" and pairing is complete.



Windows® 7

Please purchase an adapter compatible with Bluetooth 4.0 compatible with Windows 7 that you can purchase in your region. For the pairing method, please refer to the instruction manual for the Bluetooth® adapter compatible with Bluetooth 4.0. (* We cannot take responsibility for its operation)

Hint for pairing
Select "ELECOM Relacon" from the list of devices.


macOS Mojave (10.14)

Can only be used for Macintosh compatible with Bluetooth 4.0.

- 1 From the Apple menu, click "System Preferences..." to display the system environment settings screen.



- 2 Click "Bluetooth" to display the "Bluetooth" environment settings screen.



- 3 During device search, hold down the pairing button on the side of the product for around 5 seconds, and then release.
The product will be in pairing mode and the battery indicator light will blink red.



- 4 Select "ELECOM Relacon", and click "Connect" to start pairing.



- 5 When it changes to "Connected", pairing is completed.




Android


Instructions for Pixel 3 (Android 9) are as follows.

- 1 Open "Settings" on your device.

- 2 Hold down the pairing button on the side of the product for around 5 seconds, and then release.
The product will be in pairing mode and the battery indicator light will blink red.



- 3 Tap on "Connected devices".



- 4 Tap on "Pair new device"

The Bluetooth will turn ON automatically if it is OFF.



- 5 Select "ELECOM Relacon" from "Available devices" and tap on the display.
Pairing will begin automatically.




- 6 When pairing is complete, "ELECOM Relacon" will appear under "Connected devices".



If pairing fails, delete "ELECOM Relacon" from "Available devices". Turn OFF the Bluetooth on your device and switch off the power on this product before attempting the pairing again.


How to clean the trackball

- 1 Remove the battery cover.
- 2 Use a thin rounded stick to push the ball from behind.



Do not use a sharp and pointed end.

- 3 Use a cotton bud or similar to remove the dust accumulated on the three contact surfaces of the red ball.



When cleaning around the optical sensor, take care not to damage the sensor.

Specifications

Supported OS	Windows® 10, Windows® 8.1, Windows® RT8.1, Windows® 7, macOS Mojave(10.14), Android 6.0 or above (Updating the OS or installing a service pack may be necessary.) * Compatibility information was retrieved during operation confirmation in our verification environment. There is no guarantee of complete compatibility with all devices, OS versions, and applications.
Resolution	500/1000/1500 dpi (switchable)
Compatible Bluetooth versions	Bluetooth® 4.0 (Bluetooth® low energy)
Compatible standard	Bluetooth 4.0 Class2
Supported Profile	HOGP (HID Over GATT Profile)
Radio frequency	2.4 GHz band
Radio wave method	GFSK
Radio wave range	Non-magnetic materials (such as wooden desks): approximately 10 m Magnetic materials (such as iron desks): approximately 3 m * These are test values in company environment and are not guaranteed.

Read method	Optical sensor method
Dimensions (W × D × H)	Mouse : Approximately 41 mm × 112 mm × 57 mm Stand : Approximately 65 mm × 65 mm × 37 mm
Operational temperature/humidity	5°C to 40°C/ up to 90%RH (without condensation)
Storage temperature/humidity	-10°C to 60°C/ up to 90%RH (without condensation)
Supported battery	Any two of AAA alkaline batteries, AAA manganese batteries, AAA type nickel-metal hydride batteries
Operational time	Estimate when using alkaline battery Continuous operation time: Approximately 107 hours Continuous standby time: Approximately 76 days Estimated usage time: Approximately 127 days (The above is assuming the computer is used for eight hours a day with 5% of that time spent operating the mouse.)