

PRO-GAMING MOUSE

----- Wireless

Thank you for choosing our gaming mouse. Please read the user manual carefully before and when you use this product.


Package content

- Mouse x 1
- Manual x 1
- 1.6m Type-C cable x 1

Compatibility

Compatible with Windows 7, Windows 8, Windows 10, Mac OS (Only basic function, no software available)

Keys Function

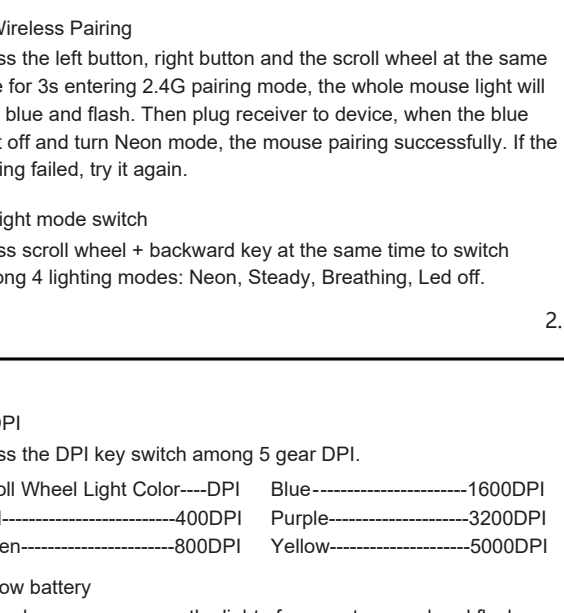

1.

Specification

Mouse size	123.6x63.8x38.3mm
DPI	400-800(default)-1600-3200-5000
Working Voltage	5V
Working Current	≤ 500mA
LR Key Switch	60million
Battery	500mAH built-in battery
Foot pad material	Teflon
Weight	70g

Mouse Usage

- Power Charging**
Connecting the device and mouse, when charging the indicator turn red, after full charged the indicator turn off.
- Wired/Wireless mode**
When connected the device with cable, the mouse will enter wired mode automatically; while only insert the USB receiver, the mouse will enter wireless mode.
- Wireless Pairing**
Press the left button, right button and the scroll wheel at the same time for 3s entering 2.4G pairing mode, the whole mouse light will turn blue and flash. Then plug receiver to device, when the blue light off and turn Neon mode, the mouse pairing successfully. If the pairing failed, try it again.
- Light mode switch**
Press scroll wheel + backward key at the same time to switch among 4 lighting modes: Neon, Steady, Breathing, Led off.

2.

5. DPI

Press the DPI key switch among 5 gear DPI.
Scroll Wheel Light Color---DPI
Blue-----1600DPI
Red-----400DPI Purple-----3200DPI
Green-----800DPI Yellow-----5000DPI


6. Low battery

When low power occurs, the light of mouse turns red and flashes, please charge in time.

Driver setting

- Installation**
Download the driver from <https://www.deluxworld.com/en/service/download/> and install the driver.
Note: Please make sure this mouse is already connected to computer when setting the functions in the driver. After installing, you can proceed button setting, lighting setting, DPI setting, Macro setting and so on.
- Settings**
Open driver setting interface (mouse must be connected, otherwise driver software unable to be opened):
a. Multi-group setting are available to be proceeded;
b. The battery power can be displayed in wireless mode, and the charging status can be displayed in wired mode;
c. The default state can be restored after clicking the "Restore" button.

3.

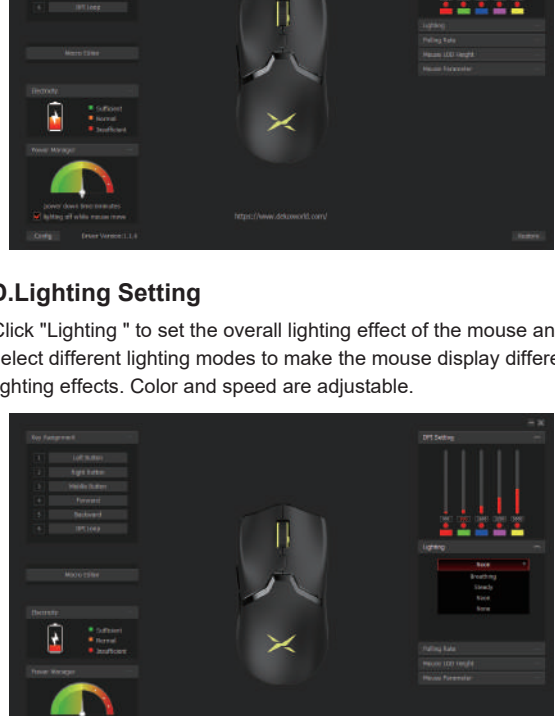

4.

B. Power Manager


- The battery down time can be set to 3-10 minutes. After sleep, you need to click the button to wake up the mouse;
- You can choose to turn off the light while mouse move. After click, the decorative light will automatically turn off when the mouse moves. When the mouse stops moving, the light keeps on for 1 minute, and then enter hibernation mode.



6.

C. DPI Setting


Click "DPI Setting" to proceed DPI gear, DPI value modification, lighting color for different DPI value.

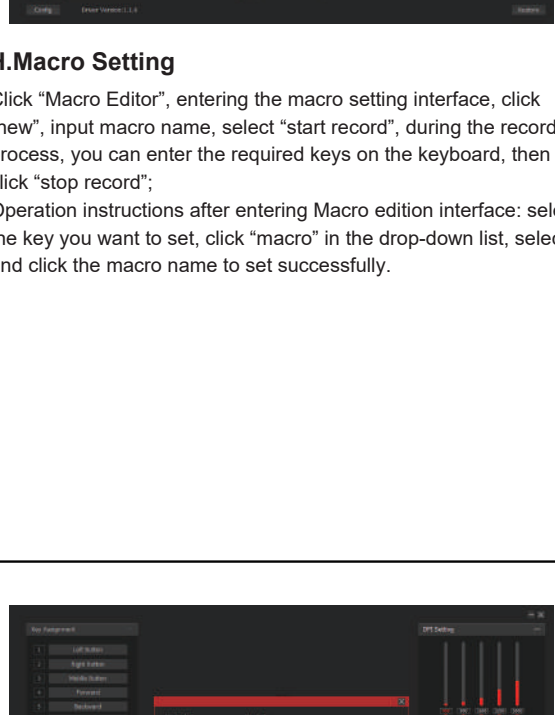

7.

D. Lighting Setting

Click "Lighting" to set the overall lighting effect of the mouse and select different lighting modes to make the mouse display different lighting effects. Color and speed are adjustable.

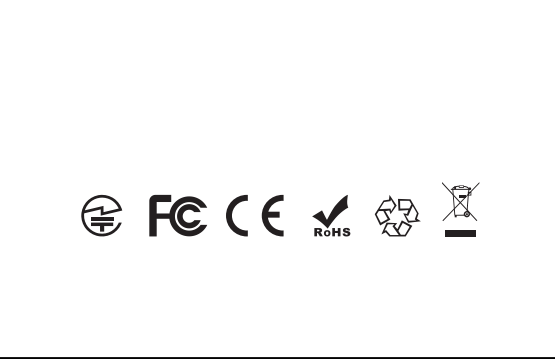

8.

E. Polling Rate Setting

Four level polling rate can be chosen: 125Hz-250Hz-500Hz-1000Hz.

F. LOD Setting

Click "Mouse LOD Height" to enter mouse mouse height lifted setting, adjusting height low gear to be 1mm or 2mm.

9.

G. Parameter Setting

Click "Mouse Parameter" to enter the system mouse setting interface.

H. Macro Setting

Click "Macro Editor", entering the macro setting interface, click "new", input macro name, select "start record", during the recording process, you can enter the required keys on the keyboard, then click "stop record";
Operation instructions after entering Macro edition interface: select the key you want to set, click "macro" in the drop-down list, select and click the macro name to set successfully.

9.

9.