Keychron

K2 Wireless Mechanical Keyboard

IN THE BOX:

Keychron K2 Wireless Mechanical Keyboard x 1

Type-A to Type-C Cable x 1

Manual x 1


Quick Start Guide x 1

Extra Keycaps Set x 1

QUICK START GUIDE


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.


Mac / Windows

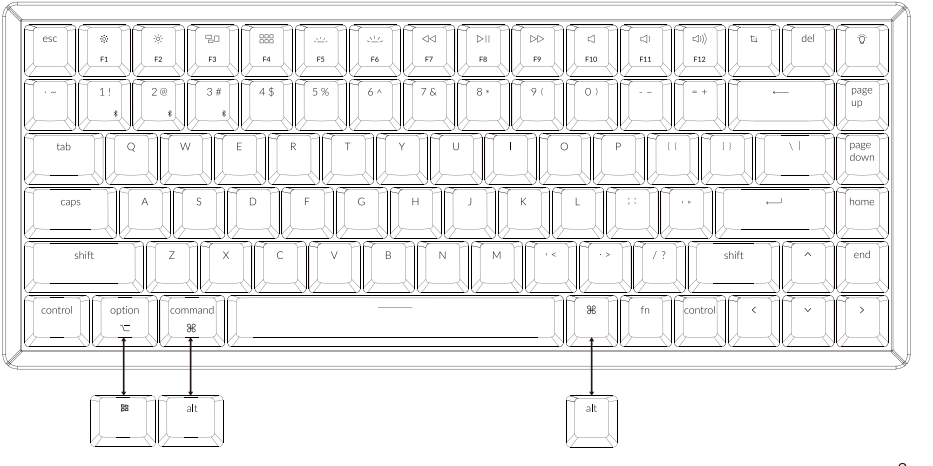


1 Connect Bluetooth









2 Connect Cable






3 Switch To The Right System

Please make sure the system toggle on the top left corner has been switched to the same system as your computer's operating system.

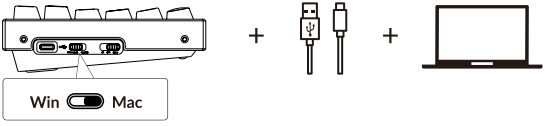


4 The Backlight

Press fn + Q to change the lighting effect

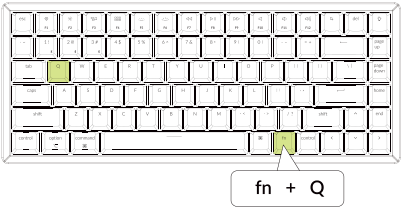


Press fn + tab to turn the backlight on/off

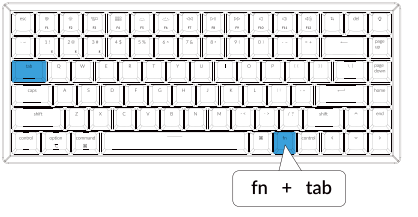


5 Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness

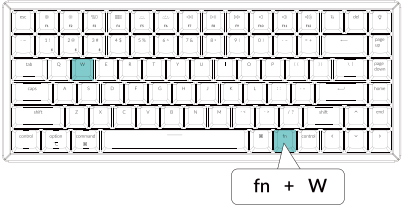


Press fn + S to decrease the backlight brightness

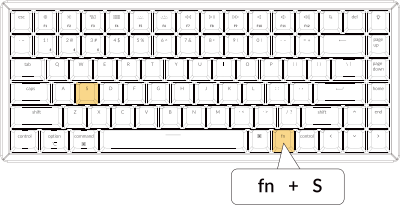


6 Adjust The Backlight Speed

Press fn + T to increase the light effect speed

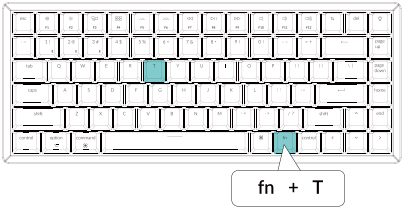

Press fn + G to decrease the light effect speed

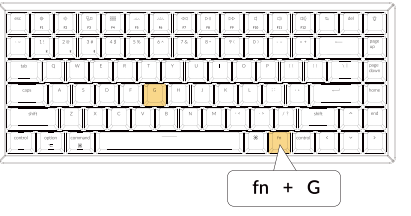


7 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



8 Factory Reset

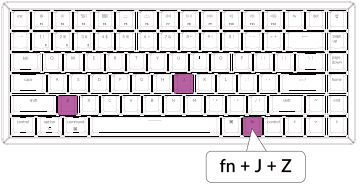

Troubleshooting? Don't know what's going on with the keyboard?

Factory reset your keyboard


1. Power on your keyboard.
2. Press and hold fn + J + Z (for 4 seconds). The keyboard backlight will flash in red quickly for 3 seconds, indicating that the keyboard has been reset.


K2 WIRELESS MECHANICAL KEYBOARD SPECIFICATIONS

Number of keys: 84
Switch type: Mechanical
Battery: 4000mAh
Charging time: Around 5 hours
Charging port: Type-C
Mode: Bluetooth / Wired
Bluetooth operating distance: Within 10 meters (open space)
Name of Bluetooth device: Keychron K2

Operating environment: -10 to 50°C
Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.

K2 WIRELESS MECHANICAL KEYBOARD OVERVIEW

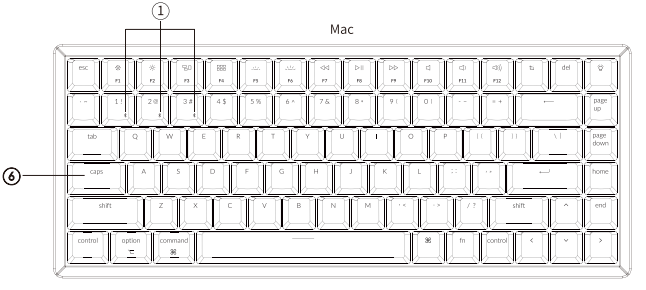



① Bluetooth Indicator

② Charging Port

③ Power Indicator

④ Win/Android Mac/iOS (OS Toggle)

⑤ Bluetooth/ OFF/ Cable

(Connection Mode Toogle)

⑥ Caps Lock Indicator

LED STATUS OVERVIEW

Function	LED Location	Status
Charging	Power Indicator	Low Power - Red Light Blinking Charging - Static Red Full charged - Static Green
Bluetooth	Bluetooth Indicator	Switching - Fast Blinking Paired - Light Off Pairing - Slow Blinking
Caps Lock	Caps Lock Indicator	Enable Caps Lock - Static White Disable Caps Lock - Light Off

FUNCTION DESCRIPTION:
CHARGING

Plug the cable into a USB port and plug the other end into the keyboard port. Power indicator: When battery is below 15%, a red power blinking indicator will be triggered. A red light will stay on while charging; Fully charged in around 5 hours, a green power indicator will appear.

*The Keychron keyboard is compatible with all USB ports. Please use a 5V 1A adapter or USB 3.0 for the best performance. The Keychron K2 can be charged in Bluetooth/on/off mode.
**This product supports up to 5V charging voltage and 1A charging current. We are not responsible for any problems caused by improper charging.

BLUETOOTH / WIRED MODE (MODE TOGGLE)

WIRED MODE

1. Switch the toggle to the “ option.
2. Connect our cable with your PC and keyboard.
3. Backlighting will be turned on.

*Under Wired Mode, keyboard will not enter into Battery Saver Mode.

BLUETOOTH MODE

1. Switch the toggle to the “BT” option.
2. Backlighting will be turned on.
3. Hold “fn+1” key for 4 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing).
4. Search for the Bluetooth device “Keychron K2” on your device and connect it (the Bluetooth indicator goes off after successful pairing).

Note: This keyboard supports pairing up to 3 devices simultaneously via key combination “fn” + “1” / “fn” + “2” / “fn” + “3”.

**The Bluetooth indicator will continue to flash for 3 minutes.*

***Slow or failed connections may exist due to different Bluetooth versions, please make sure all the settings are correct.*

SWITCH BLUETOOTH DEVICES

Short press key combination “fn” + “1” / “fn” + “2” / “fn” + “3” to switch to other device.

RECONNECT:

1. Switch the keyboard to the “BT” option to activate the keyboard.
2. The Bluetooth indicator flashes for 4 seconds and automatically pairs with the last paired device.
3. If the Bluetooth indicator is off, press any button to enter the connection again.

* The keyboard must have been paired with the device to perform this function.

AUTO SLEEP MODE:

- Under Wired Mode, the keyboard will not enter into Auto Sleep Mode.
- Under Bluetooth Mode, after 10 minutes of inactivity, the keyboard backlight turns off.

After 2 hours of inactivity, the keyboard will enter deep sleep mode and disconnect the wireless connection.

TURN OFF THE KEYBOARD

Switch the keyboard to the OFF option.

BACKLIGHT SETTING

- Short press key combination “fn”+  or “fn” +“tab” turn the backlight on/off.
- Short press key combination “fn”+“Q” or “fn”+“A” to switch between types of lighting effects.

OS TOGGLE SWITCH

1 – MAC/iOS

Switch the toggle to Mac/iOS when the keyboard is connected to a Mac or iOS operating system.

2 — WINDOWS/ANDROID

Switch the toggle to Windows/Android when the keyboard is connected to a Windows or Android operating system.

**When using the Windows/Android mode,*  *keys are used for "Windows" and "Alt" functions.*

3 — INPUT METHOD SWITCH

For iOS:

Input method switch: Ctrl + Space

Caps Lock: Caps (Enable General>Keyboards>Hardware Keyboard>Caps Lock Language Switch)

For Android:

Input method switch: Shift + Space

NOTE: Functions of certain multimedia key may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS. We also recommend not to switch OS frequently as it may impact keyboard operations.

TROUBLESHOOTING

If unable to pair keyboard to device, confirm that the device you're trying to pair with is Bluetooth–capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:
Allow Bluetooth devices to find this computer
Allow Bluetooth devices to connect to this computer
Alert me when a Bluetooth device wants to connect

My keyboard isn't working.
For the computer/smartphone:
Go to your device Bluetooth settings>Select the keyboard and remove/delete/unpair it.
Then restart your device.

For the keyboard:
Turn the keyboard off and back on. Then reconnect it to your device.

Bluetooth connection is interrupted even within 10 meters.
Check if the keyboard is resting on a metal surface that can interfere with the Bluetooth signal.

Third-party input tools are not compatible with the keyboard.
Due to compatibility, versions, brands and drivers of Windows/Android OS, functions of third-party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

Certain multimedia keys or function keys do not work.
Functions of certain multimedia keys may be disabled due to compatibility, versions, brands, and drivers of devices.

*Multimedia keys: 

Function keys: F1 / F2 / F3 / F4 / F5 / F6 / F7 / F8 / F9 / F10 / F11 / F12

Safety Precaution:
Keep the product, accessories and packaging parts out of the reach of children to prevent any accidents and choking hazards.
Always keep the product dry to avoid corrosion.
Do not expose the product to extreme temperatures below -10°C(14°F) or above 50°C(122°F) to preserve the lifespan of the keyboard.

Keychron, Inc.
Dover, DE 19901, United States
Find us at:
https://www.keychron.com
Support@keychron.com
@keychron
@keychron
@keychronMK
Designed by Keychron
Made in China