

**acer**  
**ODK390**  
**9-in-1 USB C Docking Station**

**User Manual**

**Thank you for choosing acer !**  
 Please read this user manual carefully when using this product.

**Preface**  
 Thank you for purchasing ACER products. For optimum operation, please read this manual carefully before using.


**Model:**  
 ODK390

**Item Name:**  
 9-in-1 USB C Docking Station

**Product List:**  
 1x 9-in-1 USB C Docking Station  
 1 x User Manual  
 1 x Warranty Card

**Compatibility**  
 The 9-in-1 Intelligent Type-C Hub Docking Station is a high-performance USB 3.1 hub that offers a range of expansion options for your computer. Featuring a total of 9 ports, including 3 USB A 3.1 ports, SD and TF card ports, a Gigabit RJ45 port, a VGA port, a 4K/30Hz HDMI 2.0 port, and a powerful PD 100W Type C charging port. Our USB-C Docking Station is compatible with operating systems such as Windows, Linux, Mac, providing greater flexibility and convenience to enhance your computing experience.

**Product Specifications**

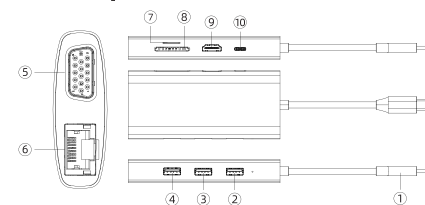


Serial number	Name	Function description
①	USB-C male	Connecting the type-c interface
②、③、④	USB-A 3.1 GEN1 female	Support USB devices : mouse , keyboard , USB flash disk , mobile hard disk and other data transmission. 5Gbps Transmission speed and downward compatible with USB 3.0 / USB 2.0 / USB 1.1
⑤	VGA female	Support 1080P high-definition video output
⑥	RJ45 female	Gigabit Ethernet port supporting 1000Mbps network connection.
⑦	Micro SD	Support TF / micro SD and other memory cards
⑧	SD	Support SD / SDHC / SDXC and other memory cards
⑨	HDMI female	Support high-definition HDMI 4K@30Hz video output, downward compatible with 2K, and support HDCP 1.4/2.2
⑩	USB-C female	Input : support 100W fast charging

**Material:** Aluminum  
**Product weight:** ≈83g / 0.18lb  
**Product size:** 112mm\*50mm\*17mm / 4.4\*1.97\*0.67 inches  
**Cable length:** 170mm / 0.56ft  
**Operating temperature:** 0°C-40°C

**Product precautions**

- The PD power supply function requires a standard PD power adapter to power the product and the computer.
- The charging is intermittent , Please check and confirm that the interface of the type-c motherboard of the computer and the plug of the power adapter are in go.
- When the TF / SD memory card needs to be removed after the installation, please remove it safely on the computer before pulling it out . Do not pull it out by force to avoid data loss , disk error , damage ,etc.
- When using a large mobile hard disk or solid state hard disk , please connect the external power adapter of the hard disk or connect the external power supply of the computer to charge the computer.

5. When using the HDMI and VGA connector , make sure your computer has the video output function.  
 6. Note: When VGA and HDMI are connected simultaneously, only identical displays are supported on two screens.

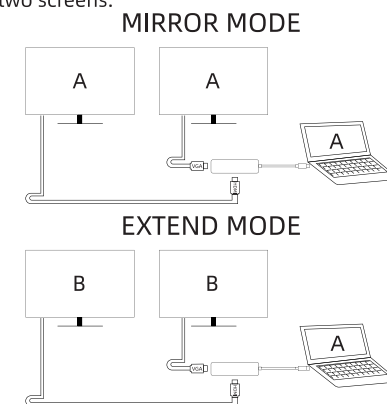

7. The Gigabit network card of this product is plug and play on Apple Mac OS and Win10 systems When it is accessed for the first time on Win7 , Win8 and Win8.1 systems , you may be prompted to install the driver automatically . ( Please refer to page 6 for installation instructions for the drivers. )


**If you are using Microsoft's Windows 7 or Windows XP operating systems and need to open a drive to install drivers, follow these steps:**

**Insert the Drive:** First, insert the CD, DVD, or USB drive containing the drivers into your computer.  
**AutoRun:** Typically, Windows will automatically detect the newly inserted drive and initiate the AutoRun program. If an AutoRun dialog box appears, you can directly choose to install the driver from there.

**Manually Open the Drive:**  
 In Windows 7/XP, open "Computer" (or "My Computer") and then double-click on the drive icon.  
**Locate Installation File:** Find the installation file in the drive, usually named "setup.exe" or "install.exe."  
**Run the Installer:** Double-click the installation file and follow the instructions to complete the driver installation.  
**Restart the Computer:** After installation, restarting the computer for the drivers to take effect.

Please note that Windows XP system may not support the latest hardware and drivers. You can upgrade to Windows 10 or Windows 11 for better compatibility and security.

**The following is an operational demonstration:**

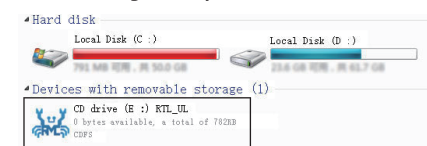

**After-Sale Services**

If you are not sure how to get your ACER product working properly, please contact our friendly support team at your free time for a quick solution.

**Customer Services: 978 230-8895(US)**  
**Mon-Fri: 9am-6pm (EST)**  
**Product Pictures:**



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the manufacturer could void the user authority, which is granted by the Federal Communications Commission, to operate this product.

