


Safe-Plate Outlet Safety Cover

INSTALLATION:

Flat head screwdriver needed.

1. **WARNING:** Turn off circuit breaker or fuse before installing Safe-Plate.
2. Remove the outlet cover.
3. Place Safe-Plate over receptacle and insert supplied screw(s) into hole(s). Tighten with flat head screwdriver.
4. After installation, check the slide cover to ensure it returns freely; if not operable, loosen the screws slightly until operable.
5. Restore power.

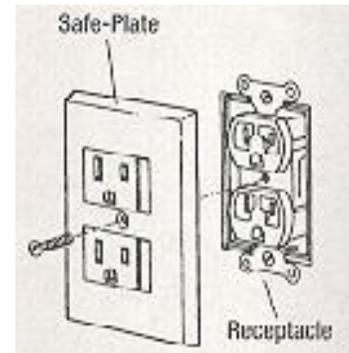

Minor receptacle adjustment may be needed if Safe-Plate fits wall too loosely or too tightly.

To adjust loose receptacle: Shut off circuit breaker or fuse. Tighten top and bottom screw of receptacle to draw it further into wall. Do not overtighten.

To adjust tight receptacle: Shut off circuit breaker or fuse. Slightly loosen top and bottom screws of receptacle. Installation of Safe-Plate will then draw receptacle out to meet back face of the cover.

EASY OPERATION:

1. Insert plug into plug face.
2. While pressing gently, slide the plug and cover to one side.
3. Continue pressing plug into outlet until firmly seated.