

### Features

- Two-handle gooseneck bathroom sink faucet.
- 3-11/16" (94 mm) gooseneck spout with rosespray.
- 7-5/16" (186 mm) wall-to-spout outlet.
- 1.2 gpm (gallons per minute) maximum flow rate.
- Lever handles with red/blue indexing (ADA compliant with correct installation).
- Optional decorative handle covers.
- KOHLER ceramic disc valves exceed industry longevity standards two times for a lifetime of durable performance.
- Less drain.
- Adjustable flanges.
- External NPT connections.
- Low Lead-Safe Drinking Water Act (SDWA) compliant.

### Material

- Brass construction.

### Installation

- 3" vertical wall-mount installation.
- Pairs with the Brockway wall-mounted wash sink.

### Recommended Products/Accessories

K-3200 Utility Sink  
K-3202 Utility Sink  
K-3203 Utility Sink



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

#### Color Code Description



CP Polished Chrome  
SR Vibrant Bright Nickel

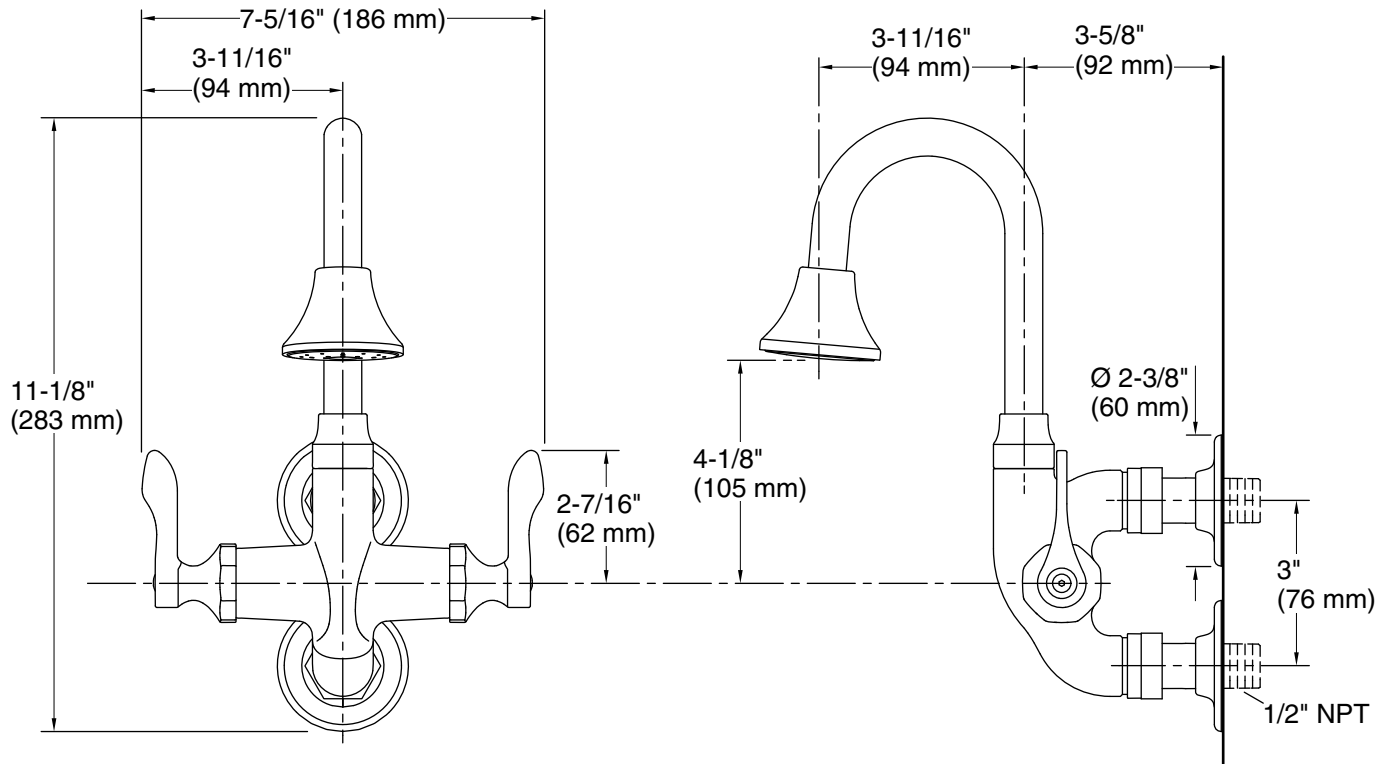

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)  
Pressure: 60 psi (4.1 bar)

#### Spout:

Spout reach: 3-11/16" (93 mm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.