

Football Projector

Menu:

ADDR	A001---A512	Address Code
CHND	16CH, 18CH	CH Select
SLND	MAST, SLAV	
SHND	SOUND, AUTO(Speed SP0—SP9)	Sounds,Auto
SENS	Sensitivity(0 off, 100 Highest)	
BLND	YES, NO	Standby Mode
LED	ON, OFF	Background
DISP	YES, NO	Reverse
PAN	YES, NO	Pan reverse
TILT	YES, NO	Tilt Reverse
MANU	PAN, TILT L-R, L-G, FLASH, RED, GREEN, BLUE, WHITE, DIMMER, STROBE,	Manual test
TEST	Auto test	
VER	V104	Version
RSET	YES, NO	Restore factory setting

DMX CH List


16CH:

1. Pan: 0—255 0-----540°
2. Tilt: 0—255, 0-----220°
3. Pan/Tilt speed: 0---255 Fast to slow
4. Dimming: 0—255 0-----100%
5. Strobe: 0---15 off, 16---255 Slow to Fast
6. Red dimming: 0---255 0-----100%
7. Green dimming: 0---255 0-----100%
8. Blue dimming: 0---255 0-----100%
9. White dimming: 0---255 0-----100%
10. Red laser: 0---15 Off,16---249 slow to fast,250---255 On
11. Green laser: 0---15 Off,16---249 slow to fast,250---255 ON
12. LED Strobe: 0---15 Off,16---255 slow to fast
- 13.LED Macro: 0---15 None, 16---255 Macro
- 14.Speed of LED Macro: slow to fast
- 15.Motor Macro: 0---15 None, 16---255 Macro
- 16.Speed of Motor Macro: Slow to fast

11 Channels Control Mode Icon

11 channel mode

Channel	Function	Instruction
1	Horizontal operation	0-255
2	Vertical(1) operation	0-255
3	Vertical(2) operation	0-255
4	Horizontal vertical speed	0-255
5	Dimming	0-255
6	Strobe	0-255
7	Red dimming	0-255
8	Green dimming	0-255
9	Blue dimming	0-255
10	White dimming	0-255
11	Reset	250-255 (5 seconds)

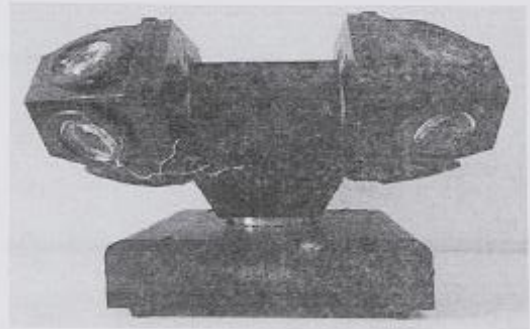

Two heads and 12 full-color headlights

ADDR A001---A512
CHND 11CH, 14CH
SLND MAST, SLAV