


# DP134(85564) and DP135(85596)product Firmware Upgrade Instructions for CH7218:

Regarding the issue of HDR/VRR unavailability of the product, please refer to the following firmware upgrade tool:


<https://www.mediafire.com/file/ibuw3ezvcefcpxn/85564&85996-CH7218+Firmware+Update+Tool.zip.rar/file>

## Operation steps:


- 1: Connect the product to the device and the monitor.
- 2: In the CH7218 Firmware Upgrade Tool folder, locate chrontel chip FW upgrade Tool.exe , double-click to open it, and the programming interface will appear as shown in the figure below.

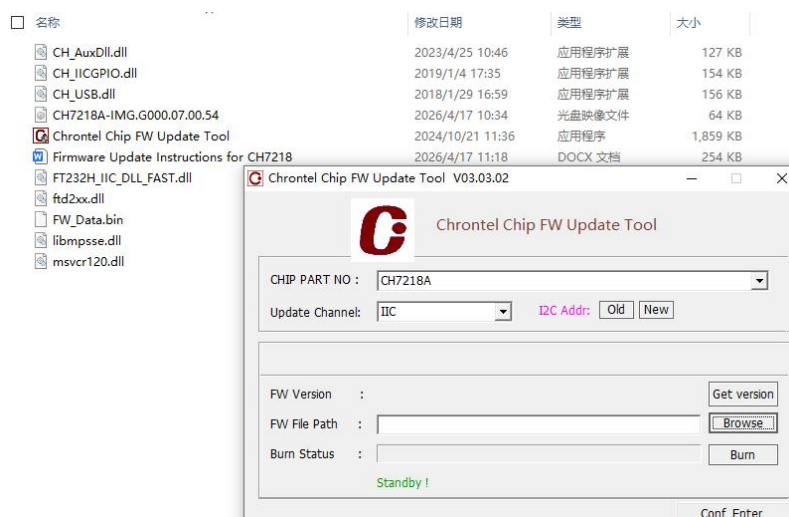


**3: In the Upgrade Channel option, select AUX.**

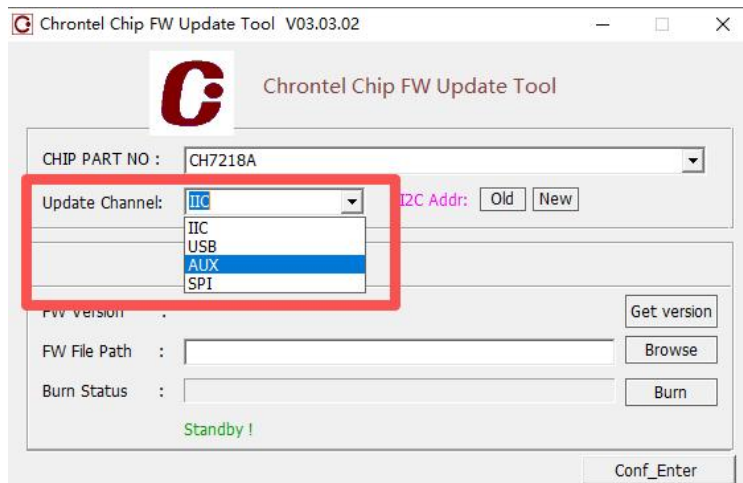



**4: Click GET version to retrieve the current firmware version.**

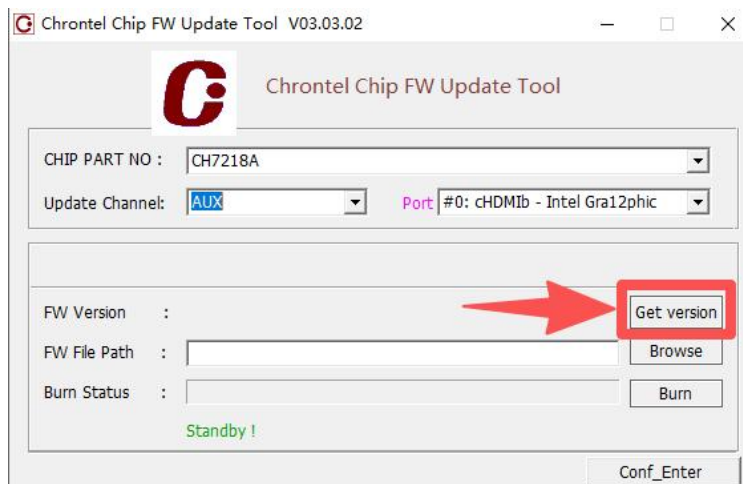



**5 : Click Browse to add the latest FW file(locate the file CH7218A-IMG.G000.07.00.54 within the upgrade package).**

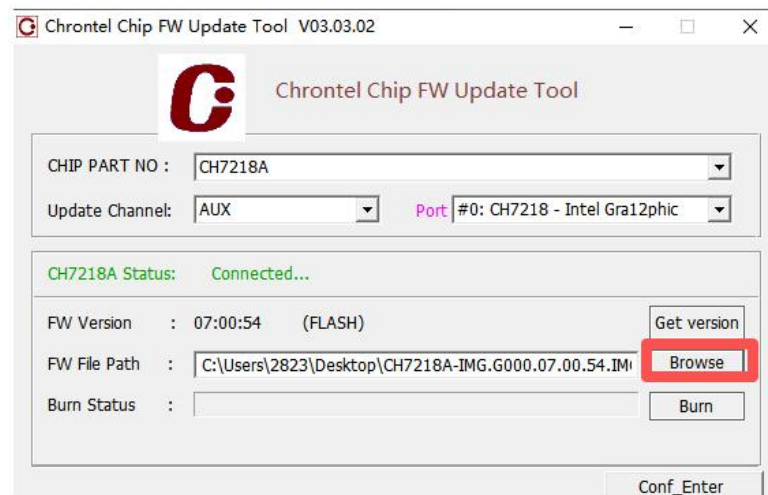

6 : Click Burn to start the firmware flashing process. In the pop-up window, select Only Upgrade

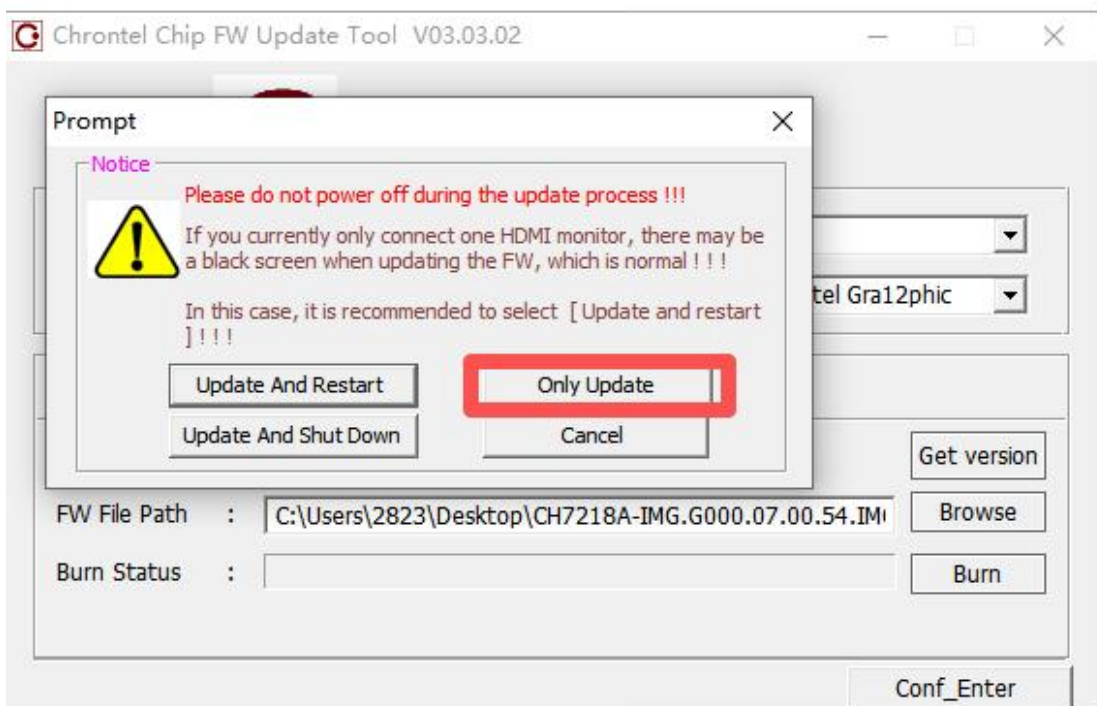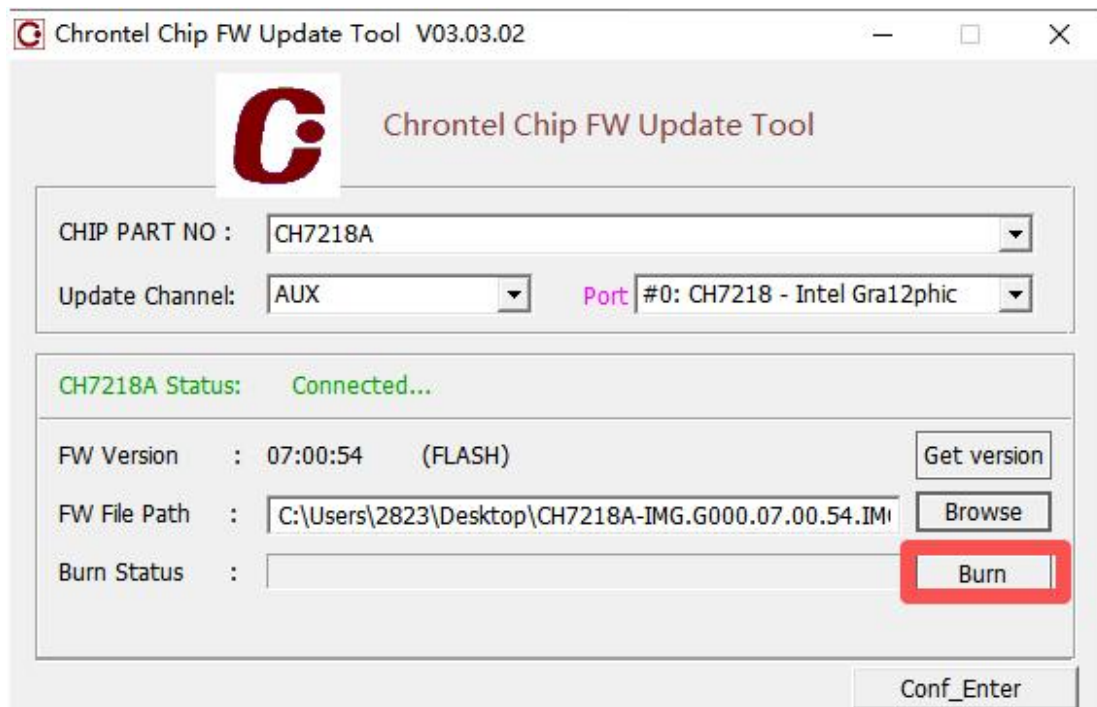

**7: Wait for 2-3 minutes, and the FW flashing will be complete.**

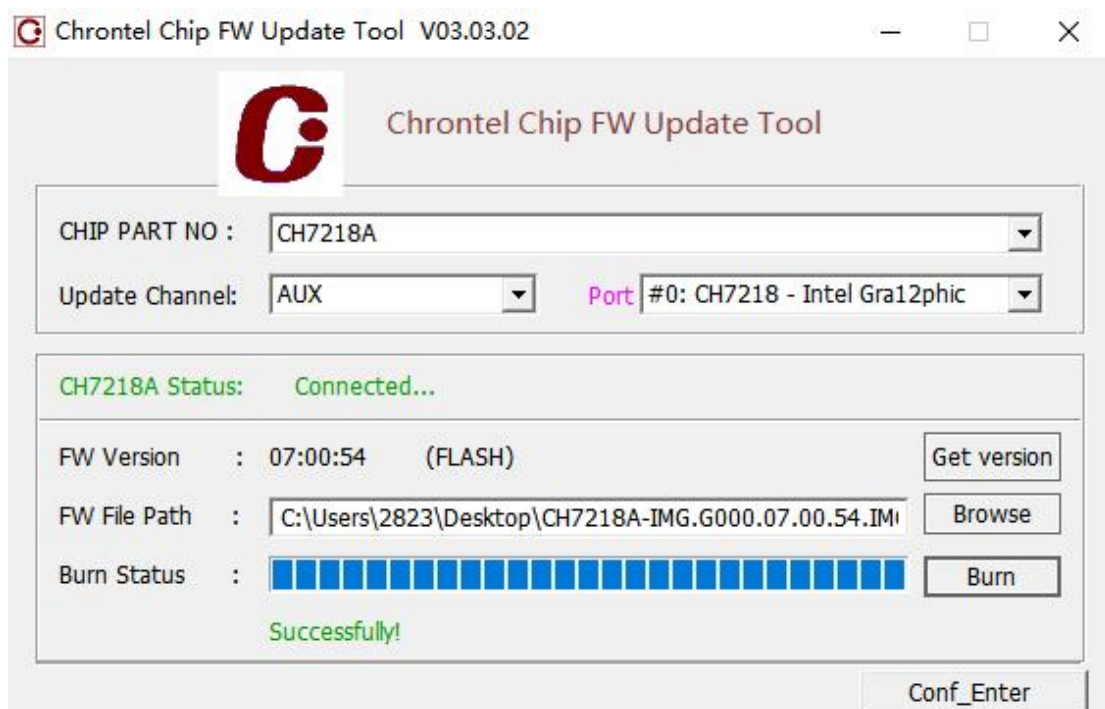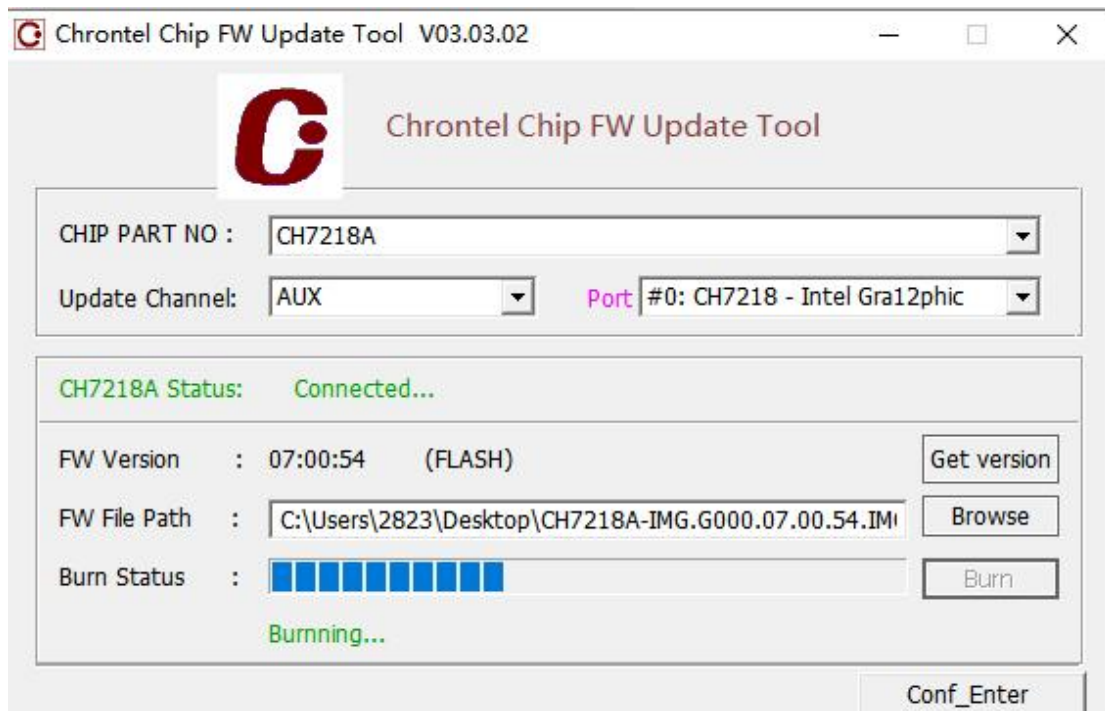

**8: Once finished, close the programming interface, unplug the product from the device, and reconnect it to use normally.**