


How to fit your 3 in 1 Harness

Proper fit is essential for the functions of the 3 in 1 Harness. With your dog standing and the harness completely unbuckled, follow the instructions below to find a proper fit for your dog.

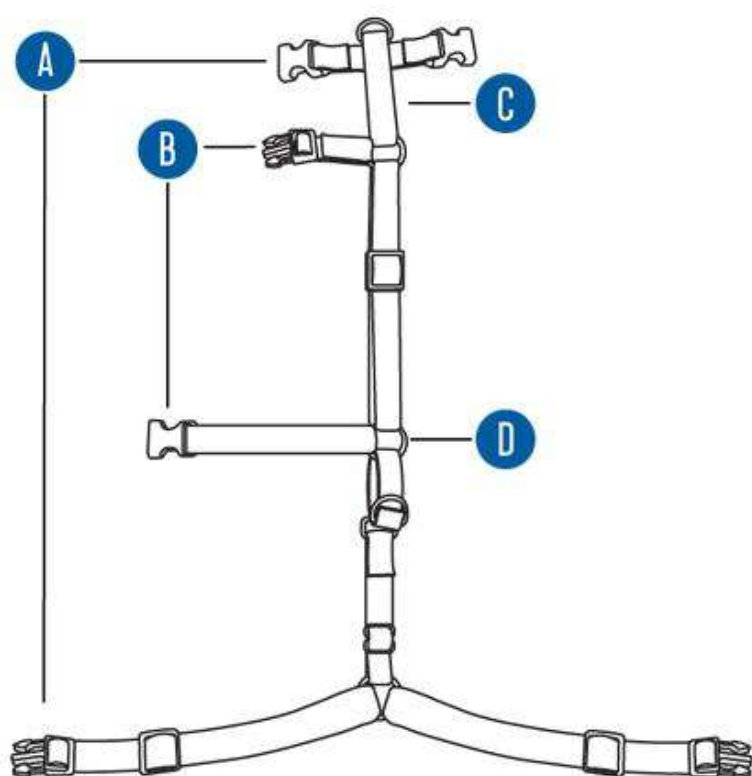

- A** Girth straps
- B** Shoulder strap
- C** Seat belt loop
- D** Chest O-Ring

Tips



Encourage your dog with praise and treats.



Find a stress-free environment, such as a quiet, indoor space.




Dogs may tense up during the fitting process, so check the fit after your dog has worn the harness for a few minutes.




- 1 Fit the shoulder straps around your dog's shoulders so the seat belt handle lies between your dog's shoulder blades.

Important: The seat belt handle is designed to prevent your dog from interfering with your driving. This is not a crash-tested safety restraint.

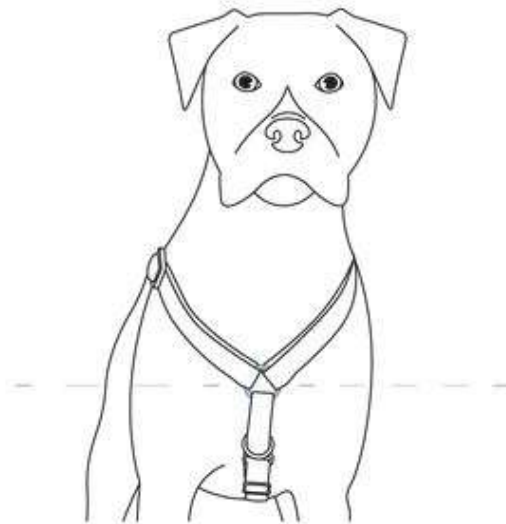

- 2** Adjust the shoulder straps so that the chest O-Ring is on or above your dog's breast bone.


Important: Correct placement of the O-Ring is needed for your dog's comfort and the no-pull function.

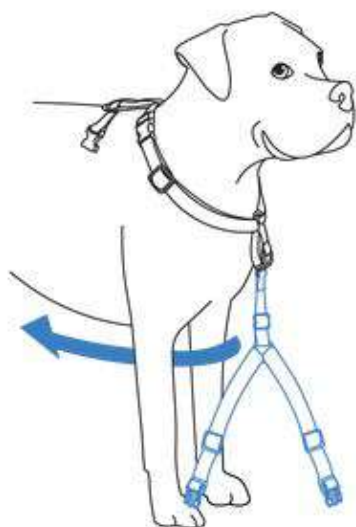

- 3** Bring the girth straps between the dog's front legs.



- 4** Attach the girth straps to the buckles on your dog's back and adjust for a snug fit.

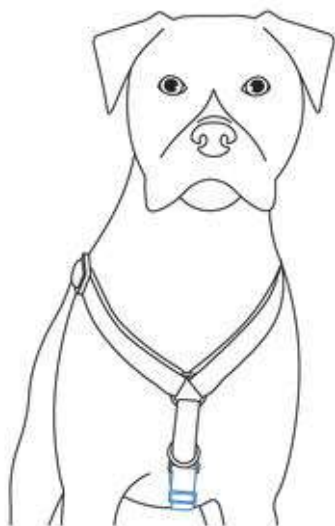

- 5** Adjust the grey strap under your dog's chest for a snug fit. Make sure the strap is not hanging off your dog's chest.



- 6** When fit properly, two fingers should barely fit between the skin and nylon strap. This prevents the harness from moving and chafing your dog's skin.