


MCHOSE L7 Series

Gaming Mouse

User Guide



Overview

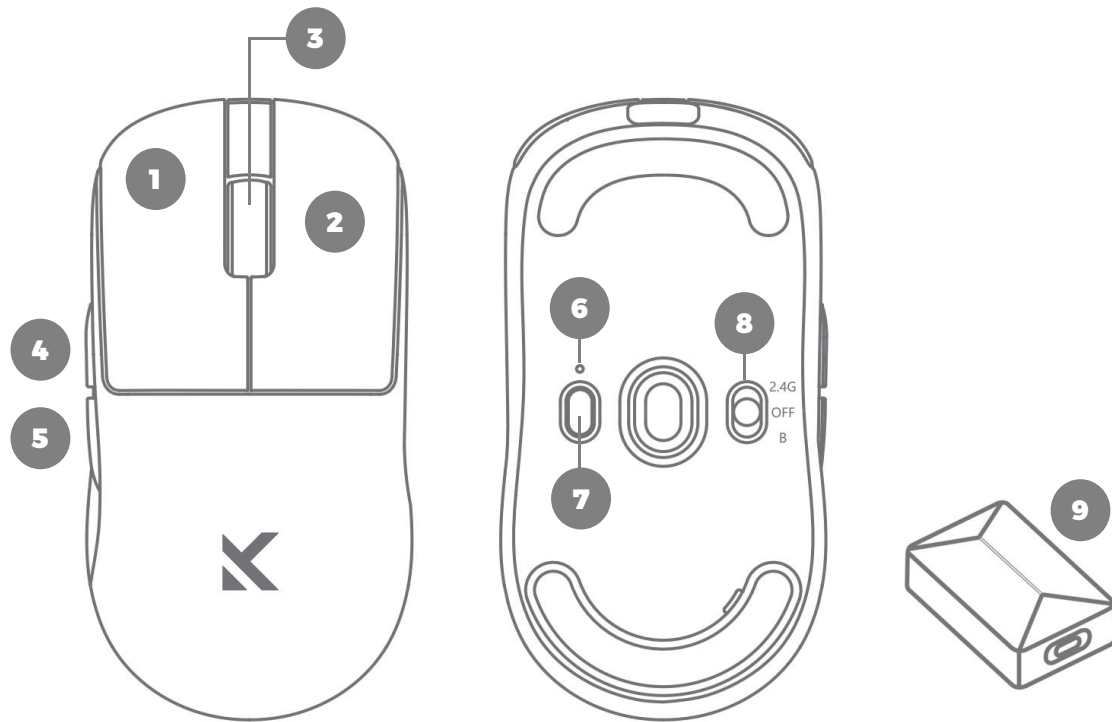

- 1** Left click button
- 2** Right click button
- 3** Mouse wheel/Middle button
- 4** Forward button
- 5** Back button
- 6** Indicator light
- 7** DPI switch button
- 8** Mode switch toggle
- 9** 2.4g RF wireless receiver


Overview

What's in the box

- MCHOSE L7 wireless gaming mouse
- Wireless receiver
- USB A-C cable
- Grip tape

Installation

Charge/wired connection

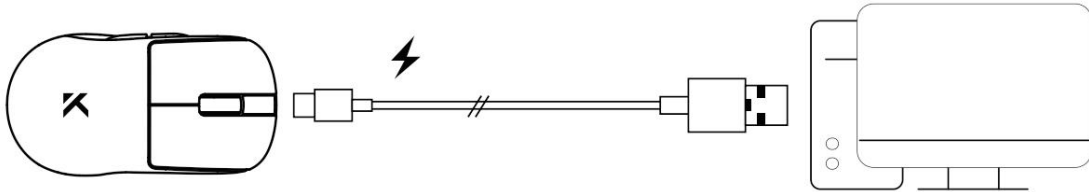



- Connect the cable to Type-C port of the mouse, and connect the cable to a USB 2.0(high-speed) or higher port of the computer.
- In 2.4G/BT mode, plugging in the USB cable automatically switches the mouse to wired mode and simultaneously charges the mouse.

Installation

2.4G RF connection

- Switch the toggle to **[2.4G]**.

Connect the USB receiver to the computer with the USB cable.

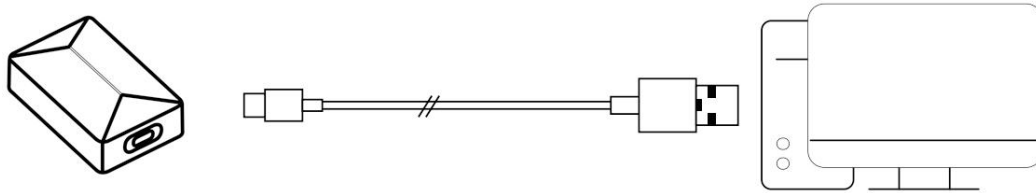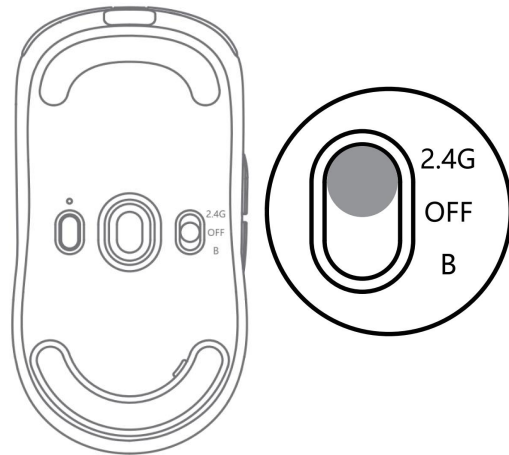



Manual pairing dongle (The dongle is default paired)

Press the **[Left]**, **[Middle]** and **[Right]** buttons of the mouse simultaneously for about 5 seconds. The Mouse will enter the re-pairing mode and the indicator light flashes. Re-plug the receiver and bring the mouse close to the receiver (within 20cm), and the Indicator light will be off after a successful connection.

Installation

BT connection

- Switch the toggle to **[B]**.

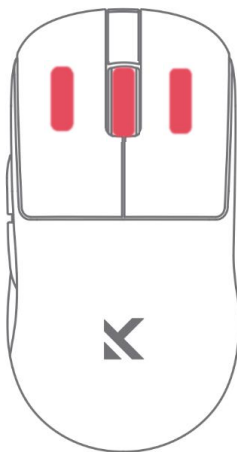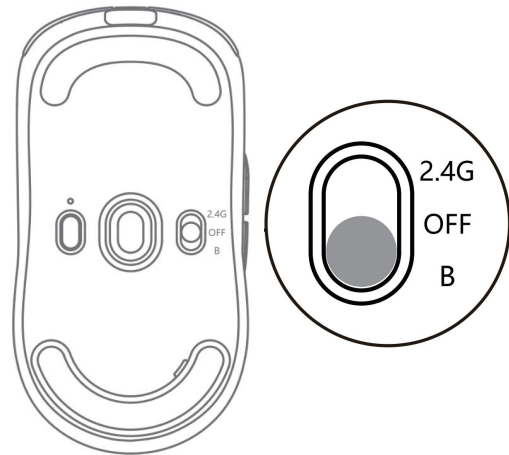


- Press the **[Left]**, **[Middle]** and **[Right]** buttons of the mouse simultaneously for about 3 seconds. The Mouse will enter the pairing mode and the indicator light flashes. Search for the device with the pairing name **[MCHOSE L7 Pro]/[MCHOSE L7 Ultra]** and pair, the indicator light will be off after the pairing is successful.

Software

To customize DPI, macro settings, update the newest firmware, and more, please download software at

<https://www.mchose.store/pages/firmware-2>

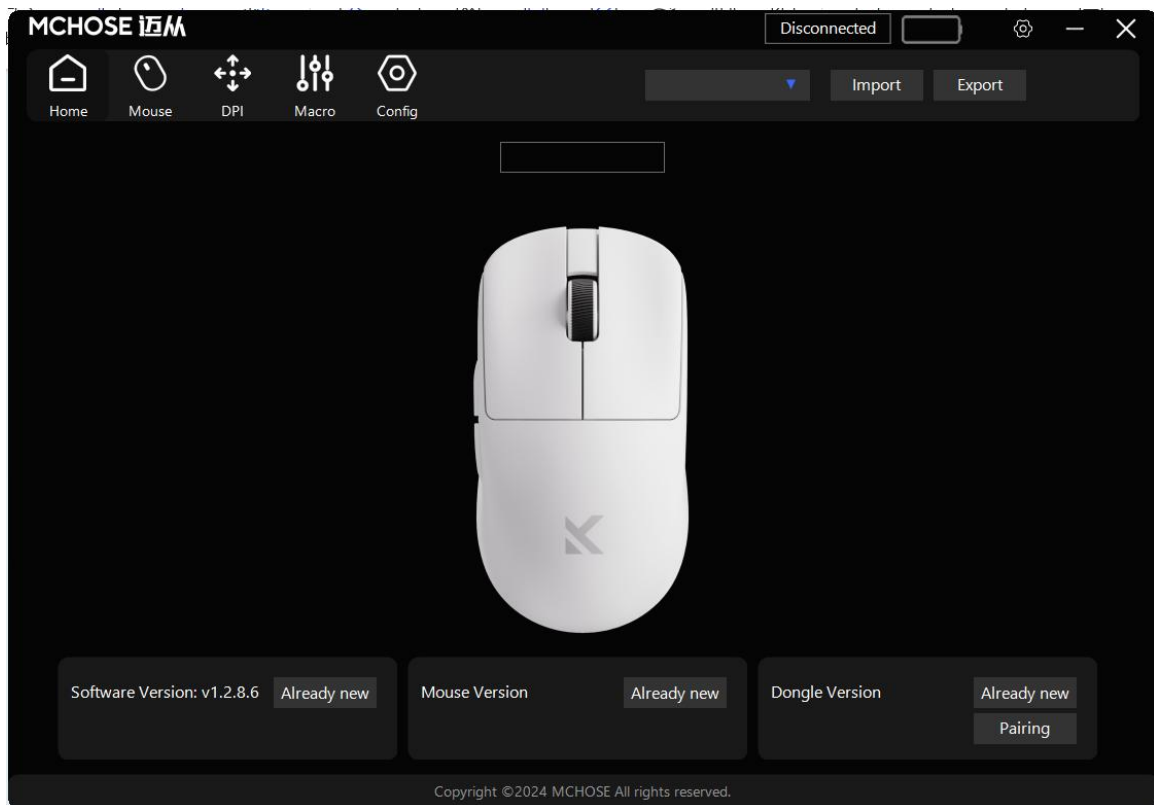


DPI

There are 6 default DPI presets.

Click the **[DPI switch]** button at the bottom of the mouse to cycle through DPI levels. Customizing and saving DPI levels can be done within MCHOSE L7 driver software.


Factory DPI setting	
DPI level	Indicator color
400	Red
800	Blue
1600	Green
3200	Yellow
6400	Cyan
26000 ^[1]	Purple

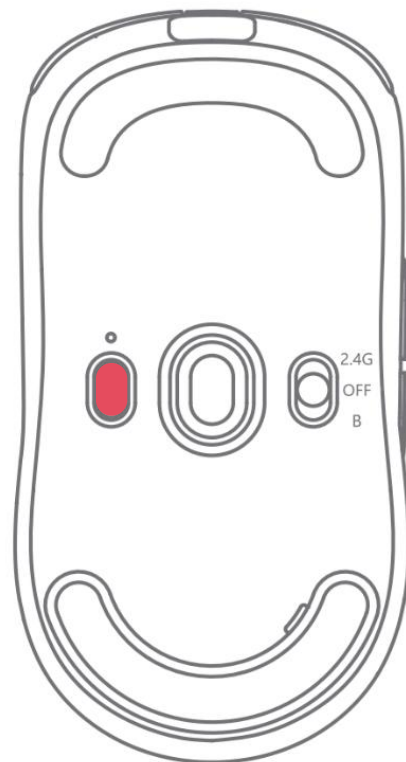

[1] L7 Ultra is equipped a PAW3950 sensor with 42000 DPI in purple light.

Power indicator

When the **[Indicator Light]** is flashing red, please charge the mouse promptly.

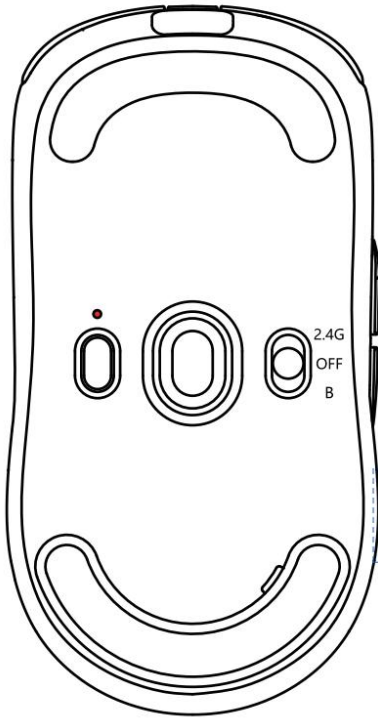

 The red indicator light is flashing:

Please charge immediately.

 The red indicator light is on:

Charging in progress.

 The green indicator light is on:

Charging complete