

14-IN-1



USB3.0
5Gbps



HDMI
4K



USB2.0
480Mbps



TF
104M/s



SD
104M/s



USB-C
5Gbps



RJ45
1000Mbps



VGA
1080P



PD
100W



Audio
3.5mm



Inhaltsverzeichnis

Wie viele Funktionen hat es?.....	Seite 3
Ist mein Laptop kompatibel?.....	Seite 3-4
• Typ Eins: unterstützt nur Datenübertragung__nicht kompatibel.....	Seite 5-6
• Typ Zwei: Multifunktions USB C__kompatibel.....	Seite 7-8
• Typ Drei: Thunderbolt 3/4__kompatibel.....	Seite 9-10
• Erkennen Sie den USB-C-Anschluss am Logo daneben.....	Seite 11
Häufig gestellte Fragen.....	Seite 12-14

Was ist die Produktfunktion?

- Datenübertragung: RJ45+1 USB2.0+3 USB3.0+1 USB C 3.0+SD/TF Kartenleser+Audio&Mic
- Videoausgang: 2 HDMI + VGA
- PD Aufladung: USB C Anschluss

Welche Art von Laptop ist kompatibel?


Der USB C Anschluss Ihres Laptops unterstützt gleichzeitig Datenübertragung, Videoausgabe und PD Ladefunktion.

Wie überprüfe ich die Kompatibilität?


- Überprüfen Sie das Benutzerhandbuch, ob Sie die USB-C-Funktion Ihres Laptops haben?
- Überprüfen Sie das Logo neben dem USB-C-Anschluss Ihres Laptops

1

- Nur Datenübertragung
- Nicht kompatibel

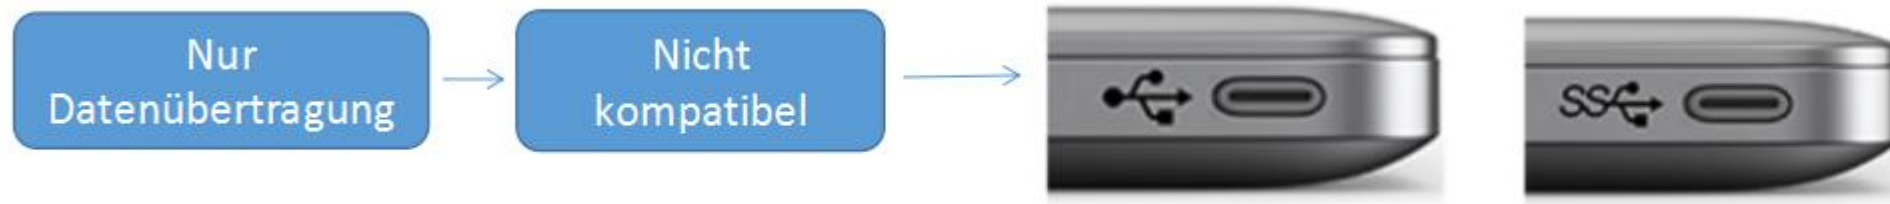

Right side

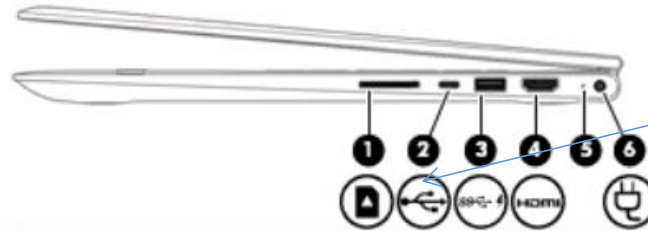

Item	Component	Description
(1)	Memory card reader	Reads optional memory cards that enable you to store, manage, share, or access information. To insert a card: 1. Hold the card label-side up, with connectors facing the computer. 2. Insert the card into the memory card reader, and then press in on the card until it is firmly seated. To remove a card: ▲ Press in on the card, and then remove it from the memory card reader.
(2)	USB Type-C port	Connects an optional USB device with a Type-C connector.
(3)	USB 3.0 charging (powered) port	Connects an optional USB device, such as a keyboard, mouse, external drive, printer, scanner, or USB hub. Standard USB ports will not charge all USB devices or will charge using a low current. Some USB devices require power and require you to use a powered port. NOTE: USB charging ports can also charge select models of cell phones and MP3 players, even when the computer is off.
(4)	HDMI port	Connects an optional video or audio device, such as a high-definition television, any compatible digital or audio component, or a high-speed High-Definition Multimedia Interface (HDMI) device.
(5)	AC adapter and battery light	• White: The AC adapter is connected and the battery is fully charged. • Blinking white: The AC adapter is disconnected and the battery has reached a low battery level. • Amber: The AC adapter is connected and the battery is charging. • Off: The battery is not charging.
(6)	Power connector	Connects an AC adapter.

das Logo bedeutet „nur Datenübertragung unterstützen“

nicht „Datenübertragung“ erwähnen, also ist es nicht kompatibel


2

- Unterstützt die Datenübertragung und Videoausgabe sowie das Aufladen von PD 3.0
- Kompatibel



Right

 **NOTE:** Refer to the illustration that most closely matches your computer.

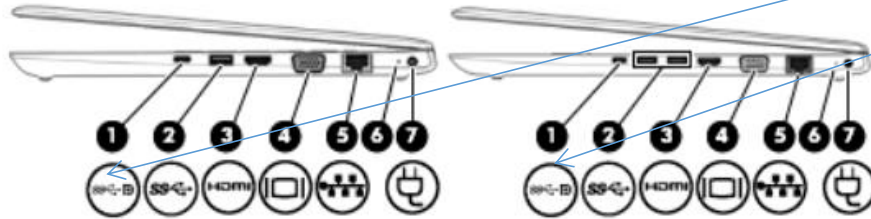

Component	Description
(1) 	USB Type-C power connector port, SuperSpeed port, and DisplayPort Connects an AC adapter that has a USB Type-C connector, supplying power to the computer and, if needed, charging the computer battery. – and – Connects a USB device that has a Type-C connector, such as a cell phone, camera, activity tracker, or smartwatch, and provides high-speed data transfer. – and – Connects a display device that has a USB Type-C connector, providing DisplayPort output. NOTE: Cables and/or adapters (purchased separately) may be required.
(2) 	USB 3.x SuperSpeed port (1 or 2 depending on model) Connects a USB device, such as a cell phone, camera, activity tracker, or smartwatch, and provides high-speed data transfer.
(3) 	HDMI port Connects an optional video or audio device, such as a high-definition television, any compatible digital or audio component, or a high-speed High Definition Multimedia Interface (HDMI) device.
(4) 	External monitor port Connects an external VGA monitor or projector.
(5) 	RJ-45 (network) jack/status lights Connects a network cable. - Green (left): The network is connected. - Amber (right): Activity is occurring on the network.

das Logo bedeutet
„Unterstützung von
Datenübertragung und
Videoausgabe“

Aufladen

Datentransfer

Video Ausgang

3


- Thunderbolt 3 oder Thunderbolt 4
- Kompatibel



Right



NOTE: Refer to the illustration that most closely matches your computer.

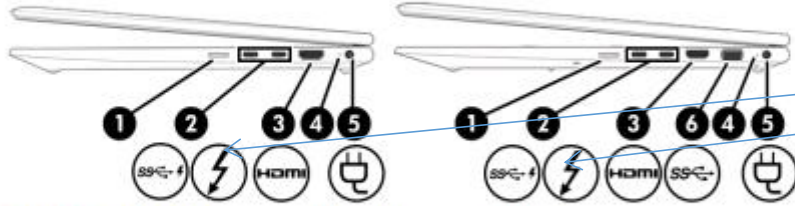

Thunderbolt 3
und Thunderbolt
4 haben dasselbe
Logo

Table 2-1 Right-side components and their descriptions

Component	Description
(1) nano SIM card slot (select products only)	Supports a wireless subscriber identity module (nano SIM) card.
(2)  USB Type-C power connector and Thunderbolt™ ports (2) with HP Sleep and Charge (select products only)	Connect an AC adapter that has a USB Type-C connector, supplying power to the computer and, if needed, charging the computer battery. – and – Connect a USB device, provides high-speed data transfer, and charges small devices, even when the computer is off. – and – Connect a display device that has a USB Type-C connector, providing DisplayPort™ output. NOTE: Your computer might also support a Thunderbolt docking station. NOTE: Cables, adapters, or both (purchased separately) might be required.

Aufladen

Datentransfer

Video Ausgang

Nur
Datenübertragung



Nicht
kompatibel



- Datentransfer
- Video Ausgang



Kompatibel



- Datentransfer
- Aufladen
- Video Ausgang



Kompatibel



Thunderbolt 3
oder
Thunderbolt 4



Kompatibel



Auflösung FAQ

Frage 1: Mein Laptop, mein HDMI Kabel und mein Monitor unterstützen alle 4K Ausgabe. Warum kann einer der Monitore nur auf 1080P bei 60 Hz eingestellt werden, wenn ich den Hub anschließe?

Antwort: Dieser Hub unterstützt höchstens einen 4K Ausgang und 1080P, da ein Teil des Datenkanals von der Datenübertragungsfunktion belegt ist.

Für DP1.2 Laptops können nur zwei 1080P-Monitore unterstützt werden.

Auflösung FAQ

Frage 2: Kann ich bei 2540*1440 auf zwei Monitore erweitern?

Antwort: Nein, diese Auflösung ist nicht im Produktprogramm geschrieben, sie funktioniert nur, wenn Sie sie auf einen Monitor erweitern.

- **Frage 3:** Wann kann ich die 4K Auflösung erhalten?
- **Antwort:** Wenn Sie einen HDMI Monitor anschließen und Ihr Laptop, HDMI Kabel und Monitor alle 4K Ausgabe unterstützen, kann er 4K Bilder auf dem erweiterten Monitor unterstützen.

Auflösung FAQ

- Frage 4: Warum kann es nicht zwei 1920 * 1200-Monitore erreichen?
- Antwort: Diese Auflösung ist nicht im Produktprogramm geschrieben, sie funktioniert nur, wenn Sie sie auf einen Monitor erweitern.
- Frage 5: Unterstützt es den Macbook Extend Modus?
- Antwort: Nein, es unterstützt nur den Spiegelmodus für Macbooks aufgrund der Beschränkung des Mac OS Systems.

Wenn Sie Hilfe benötigen, kontaktieren Sie uns bitte über Amazon Message.
Wir werden so schnell wie möglich antworten.

Service Hotline:
support01@seloretech.com