


SPECIFICATION SHEET for WESTERN

Version: A1 Date: Mar. 21, 2020

1. Electric Specifications

Model	Volt	Watt (min/max)	Hz	BTU(max)	Amp	Heating Area(max)
Western 23"-33" (EF42-45D,EF302A)	120	750/1500	60	4600	12.5	400 square feet

2. Product Dimensions

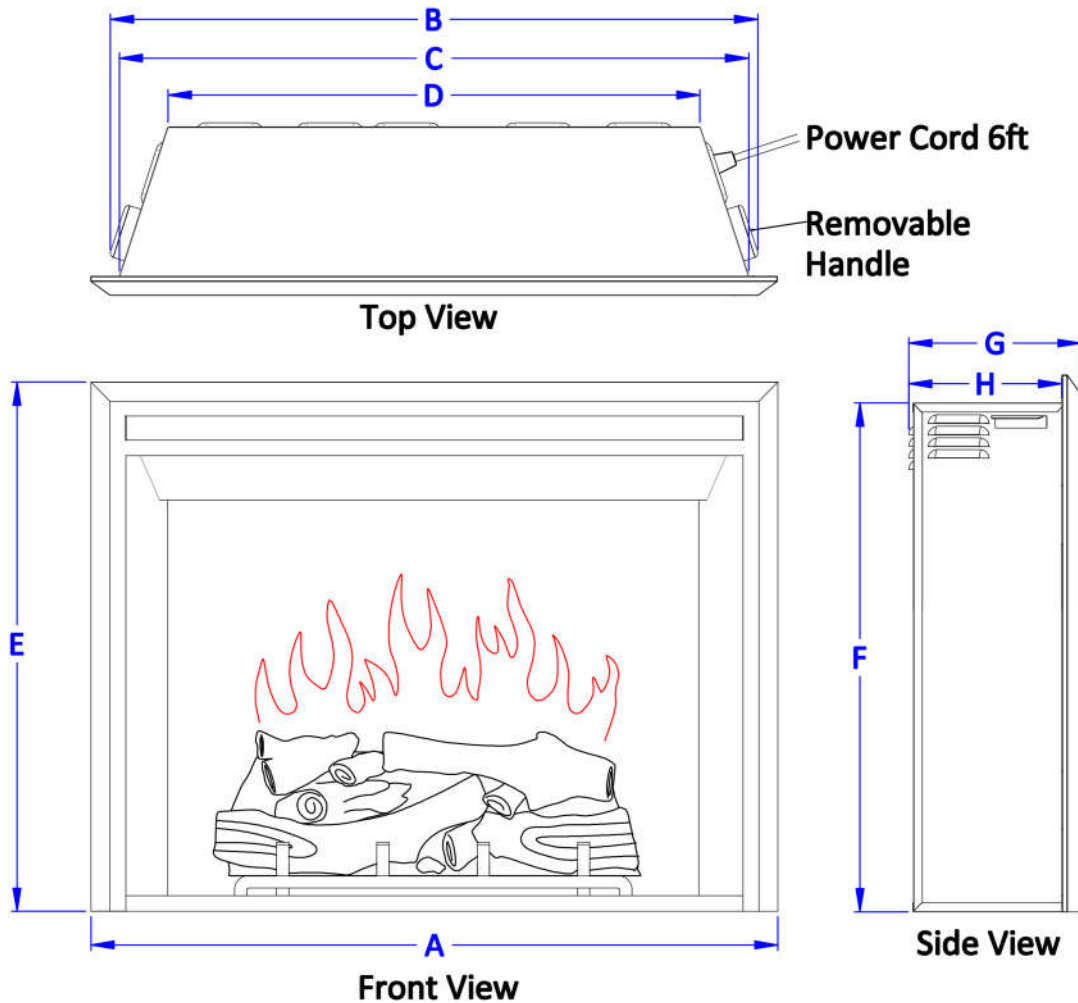

Model	Unit	A	B	C	D	E	F	G	H
EF42D Western 23"	inch	24 51/64	22 53/64	21 57/64	16 59/64	21 29/64	20 3/64	8 25/32	7 51/64
	mm	630	580	556	430	545	509	223	198
EF43D Western 26"	inch	27 61/64	25 63/64	25 3/64	20 5/64	24 39/64	23 3/16	8 25/32	7 51/64
	mm	710	660	636	510	625	589	223	198
EF44D Western 30"	inch	31 57/64	29 59/64	28 31/32	24 1/64	24 39/64	23 3/16	8 25/32	7 51/64
	mm	810	760	736	610	625	589	223	198
EF45D Western 33"	inch	35 3/64	33 5/64	32 1/8	27 11/64	26 31/32	25 35/64	8 25/32	7 51/64
	mm	890	840	816	690	685	649	223	198
EF302A Western 33" Low	inch	35 3/64	33 5/64	32 1/8	27 11/64	22 7/16	21	8 25/32	7 51/64
	mm	890	840	816	690	570	534	223	198

3. Opening Dimensions



Model		Width	Height	Depth (min)	Depth (suggest)
EF42D Western 23"	inch	21 57/64 - 23 3/16	20 5/32 - 21 17/64	7 51/64	8 7/32
	mm	556 - 605	512 - 540	198	206
EF43D Western 26"	inch	26 3/64 - 26 31/32	23 5/16 - 24 13/32	7 51/64	8 7/32
	mm	636 - 685	592 - 620	198	206
EF44D Western 30"	inch	28 31/32 - 30 9/32	23 5/16 - 24 13/32	7 51/64	8 7/32
	mm	736 - 785	592 - 620	198	206
EF45D Western 33"	inch	32 1/8 - 34 1/16	25 43/64 - 26 49/64	7 51/64	8 7/32
	mm	816 - 865	652 - 680	198	206
EF302A Western 33" Low	inch	32 1/8 - 34 1/16	21 - 22	7 51/64	8 7/32
	mm	816 - 865	537 - 560	198	206

Note: Opening dimensions in above ranges will be suitable to install corresponding model.

For more details, please see "User Manual".