




Assembly Instructions

Bench

Caution : You must read this before you proceed.

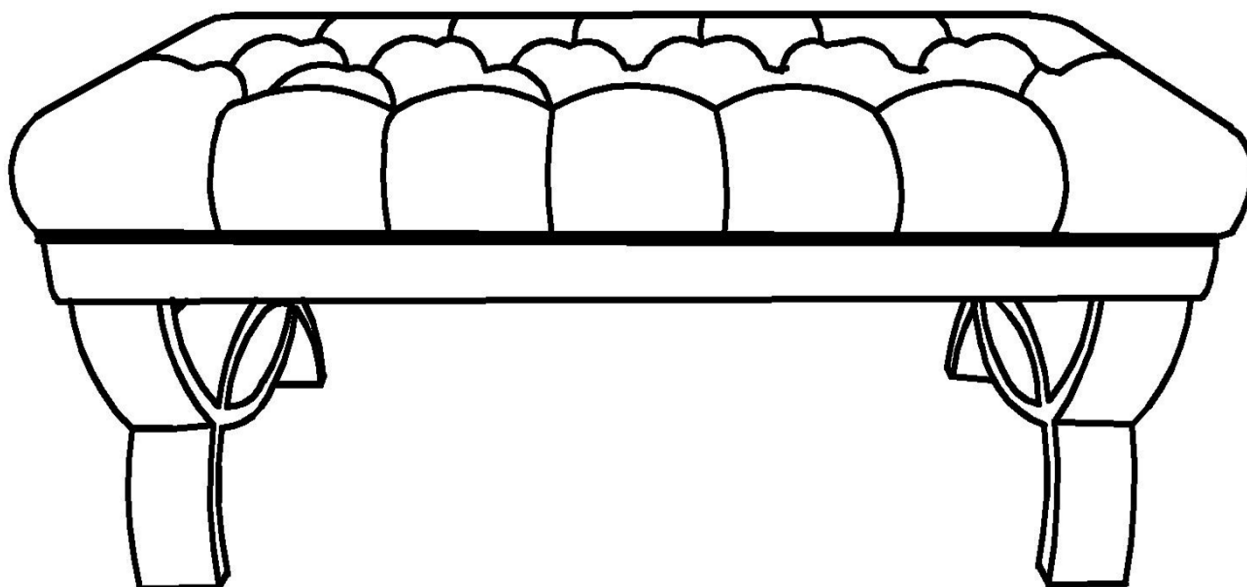

Parts List

Label	Picture	Description	Qty
A		Bench Seat	1
B		Leg	2

Hardware

Label	Picture	Description	Qty
C		Bolt Dia.M8X50mm (L)	5
D		Dia: 8MM	5
E		Dia: 22MM	5
F		Allen Key	1

Assembly Preparation

Before Beginning Assembly:



- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-

Assembly Steps

Step 1

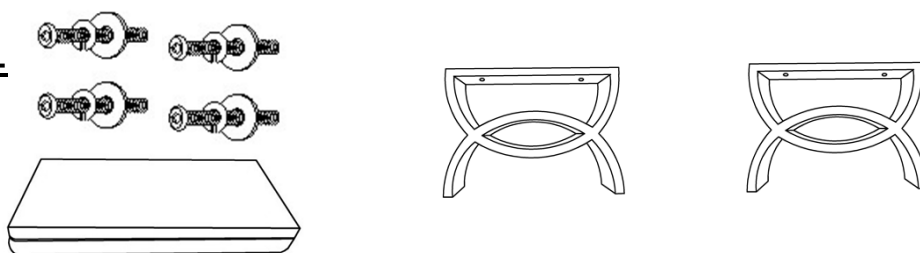


Put the Bench Seat (A) upside down with the base floorwards .
Take out 02 pcs of Wooden Leg (B) and a bag of hardware (4 bolts and 1 Allen key).

Step 2



Install the legs (B) on the leg position located on the underside of the Bench Seat (A).
Make sure the 'overhang' on the Leg Frame is placed outwards.
Insert one Spring Washer Ring(E) and then one Flat Washer Ring(D) into each Bolt(C).
Insert the Bolt through the mounting position holes in legs(B) into the threaded mounting position on the sides of the Bench Seat (A)
Use the Allen Key(F) to tighten the Bolts, in a sequential manner, by turning clockwise.
Each leg shall be fastened down with 02 Bolts.
DO NOT overtighten the first time around for all Bolts.
Repeat the same steps to the second leg(B)

Step3

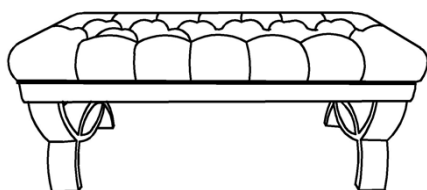

Inspect and make sure all the parts are locked into their position.
Fully and Securely tighten all the bolts, in a sequential manner.
Turn the bench in its upright position, it is ready for use.

Care & Maintenance

-  Do not put hot items directly on furniture surface.
-  Do not clean furniture with harsh cleansers or polish.
-  Do not place furniture under direct sunlight.
-  Do not place furniture near heating or cooling vents.
-  Do not write on furniture without a padded barrier to protect the surface.
-  Do not place furniture outside. For indoor use only.
-  Not for commercial use. For residential use only.
-  Stains may be removed with mild soap solution and damp cloth.

-
-  Dust and pick-up spills using a clean, non-colored, lint-free cloth.