


easyfone UDAN²

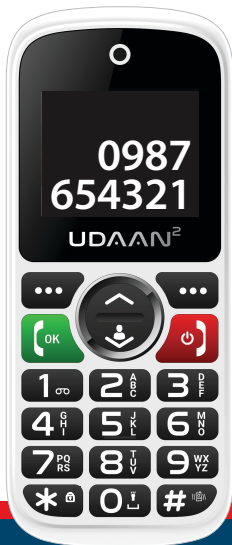

User Manual

Legal Information

All rights are reserved with eNOVUS Enterprises Private Limited (eNOVUS). Reproduction, Transfer, Distribution of the contents herein in any manner without the prior written permission of eNOVUS is prohibited. eNOVUS reserves the right to add, modify or delete, any of the contents herein or withdraw this document at any time without prior notice.

For detail Terms and Conditions, please visit our website www.easyfone.in

<u>Index</u>	<u>page</u>
---------------------	--------------------

Section 1. easyone at a glance

• What is in the box?	5
• Installation	6
• Know your device	7
• Technical specifications & SAR values	12
• Senior Friendly Features	13

Section 2. QuikMenu

• FM Radio	17
• Audio	19
• Reminders	21
• Volume Settings	24
• Delete All Inbox Messages	25
• Photo Speed Dial Settings	26

Section 3. **easyone menu features**

• Contacts	29
• Messaging	32
• Call logs	33
• Multimedia	34
• SOS	35
• Settings	37
• Blacklist	40
• Whitelist	41
• Tools	42
• Warranty	43

Section 4. **Safety, Care & Precautions**

• Safety, Care & Precautions	45
• E-waste management	48

easyfone at a glance

- What's in the box
- Installation
- Know your easyfone
- Technical specifications
- SAR value
- Senior friendly features

What is in the box

- Your easyfone Udaan² handset.
- Adapter - BIS Certified
- Rechargeable lithium- ion battery.
3.7V. 800 mAh - BIS Certified
- User manual

Installation

Step 1 - Remove the back cover by sliding your fingernail into the small notch on the bottom left side of the Back cover of the phone & pull it out gently.


Step 2 - Install the SIM Card. You can also install a memory card with a capacity of upto 32 GB for storing music or pictures.


Step 3 - Install the battery and put the back cover on.


Step 4 - Charge the battery fully as new batteries are shipped partially charged. Some batteries perform best after several full charge/-discharge cycles.

Step 5 - Switch on your phone by pressing the key with the Red printing for 2 seconds.

Know Your Device

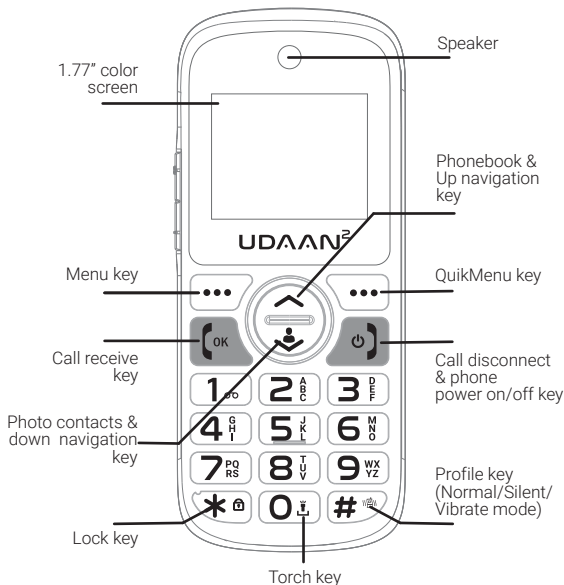

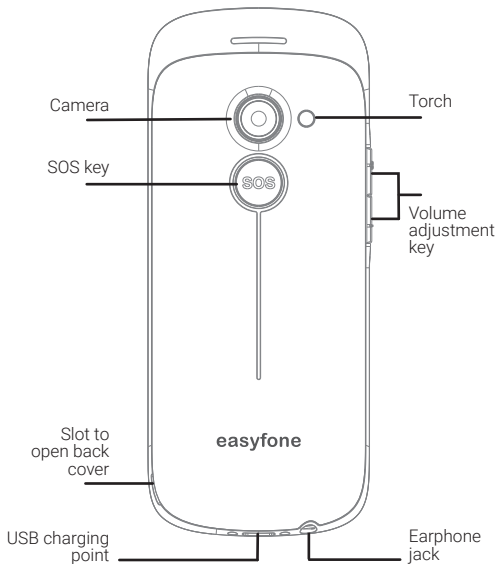

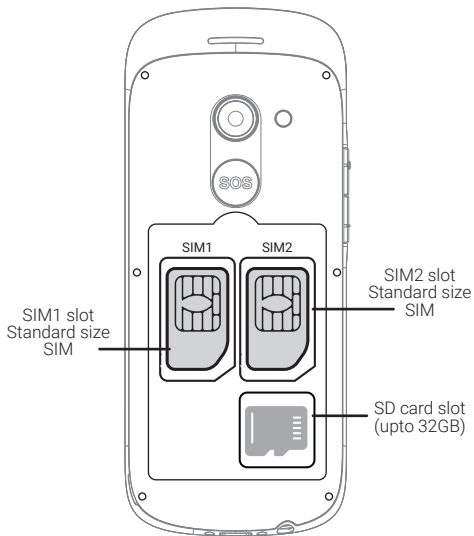



Menu key or left side command key - press this key to enter into main menu.



QuikMenu key or right side command key – press this key to enter QuikMenu.



Green key : press this key to receive a call



Red key : press this to disconnect a call. This is also used to switch on or switch off the phone by pressing it for a few seconds.




Long press this key to Lock/ unlock your phone screen.



Long press this key to change your easyfone to silent mode or vibration mode. This key is also used to change the input method (Capital letters, lower case, numbers or language) if pressed only once while writing a message.



Press the Up arrow key to access the phone book (Contacts). Press the down arrow key to access photo speed dial contacts.



Please use these keys to navigate (up, down, left & right) & press center key to enter in Menu options



Long press this key to Switch ON/OFF the torch.

Udaan² – Technical Specifications

Display	1.8" color Screen
SIM Slot	Dual
Frequency	2G Quad Band
Additional Storage	Upto 32GB SD
Battery	3.7V, 800 mAh Li-ion
LED Torch	Yes
Charging	USB
Language (Menu)	English, Hindi, Tamil, Telugu, Malayalam, Kannada & Bengali
Language (Read for SMS)	All Indian 22 languages
Earphone	3.5 mm standard
Charger adapter	I/P:100-300Vac, 50/60Hz, 0.2A, O/P : 5V-500mA

SAR Value: Easyfone Udaan² is BIS complaint & certified having SAR value as stated below

Frequency Band	Head SAR	Body SAR
	1g SAR(w/kg)	
GSM 900	0.925	0.969
GSM 1800	0.857	0.854

Udaan² Senior Friendly Features

Easy to Hear

- Loud & clear sound.
- Loud ringtone

Easy to hold

- Comfortable large size
(124x52x13)mm

Easy to Dial

- 1.8 inch color screen
- Large & seperated keys
- Large fonts on screen
- Talking keypad (while dialing numbers)
- Backlit keys
- Photo Speed Dial feature

Easy to use

- QuikMenu feature to access senior friendly features from a single place.
- Dedicated side key to change volume
- Single key to lock/unlock phone (Long press  key)

Safety features

- Dedicated SOS key to get help in emergencies
- Emergency number 112 dialling via long press of key 5
- Torch  key (Long press 0 key)

Other Unique features

- Whitelist & Blacklist to Bar unwanted callers
- Reminders – for setting one time or recurring reminders for medicines, doctor appointments, bill payments etc.

QuikMenu & standout features

The following section contains details of some very unique features of the easyfone – that have been specially designed for seniors.

These features have been aggregated in QuikMenu in your easyfone.

The features includes FM Radio, Audio, Reminders, Volume settings, Delete all Inbox messages, Photo speed dial settings.

FM Radio

FM Radio : To listen to your favorite FM channels on the easyfone.

Press FM radio to enter and press OK to select. Press Options and you will get the following

- Play/ Pause
- Select “Auto search” if you would like to auto search & save the available radio channels. Please do this in an area where the FM signal strength is good for best impact.
- Channel list - You can store upto 40 channels here - either manually or by using the auto search option in the menu. To manually input the channels, use the  key for the decimal eg 93.5
- Save - Save channel name.
- Select “Manual search” if you want to input the channel frequency number manually.

- Open/Close Speaker - To activate/ deactivate phone speaker while using earphones.
- Go to settings to set up background play (on/off).
- Press the Left or Right arrow key to switch to next available channel.
- Record - Press Select to start recording. Use stop/pause option. The audio files will be saved in file list. It is advisable to have your SD card as a preferred storage option since your phone has extremely limited space to store additional images.
- Scheduled recording - Press Ok to enable and schedule recording of your favourite FM programme.

Audio Player:

To listen to songs, you can put upto 32GB external memory card in your easyfone. In order to play music from your memory card

- Please insert the external memory card with your music into the easyfone
- Select Audio player, your easyfone will automatically detect songs from your memory card. For manual selection and playlist creation, select options & then select Musiclist. The screen will show "Empty" the first time you do this. Select Options again & press Ok to Add to the playlist. You will be now redirected to your memory card.
- Select the desired folder in your memory card & press options. You will be given 2 choices – select or Open the folder. If you select the folder & press OK, all the songs inside the

folder will be available in the playlist in the audio player. If you open the folder, you will be able to browse through the song list....- press OK to see the same song in your playlist.

- Once the songs are in the playlist, you can listen to them by entering Audio player menu. You can browse through the song list by pressing up arrow key or down arrow key.
- Alternatively, you can go to Multimedia menu, then my files option, select your SD card, go to your music folder and play the music of your choice.

Reminders :

You can use this feature to set reminders for medicines, doctor appointments, birthdays etc. To use this feature, please press the key for reminders on the QuikMenu or Menu > Tools > Reminders

- You will be taken to the month view with current date highlighted in color.
- Press Options to use various features
 - o **Add new Schedule**
 - o **View Schedules:** This gives you a view of the reminder scheduled for today
 - o **All Schedules:** This gives a view of all the reminders scheduled in your easyfone.
 - o **Clear today's Schedule**
 - o **Clear all**
 - o **Go to date**
 - o **Weekly**
 - o **Daily**

Add new Schedule - To add a new reminder

- o Select Add new schedule & press Select
- o Input the desired text in Subject.
- o Put the start date & time of the reminder
- o Select Ringtone type for alert.
- o Decide the frequency of the reminder which can be once; every day; weekly; monthly or yearly.
- o Put end date & time of the reminder
- o Once all of the above is done, select and save the reminder.
- o The reminder will start reflecting in the calendar view.

- o You can set a maximum of 20 reminders. A reminder with a frequency of more than once, will only be counted as a single reminder. As an example – if you have set a medicine reminder for yourself for 13:00 hrs everyday for a full year – it will be counted as a single Reminder.

Clear today's Schedule : From here you can delete all the reminders for today.

Clear all : From here you can delete all the reminders.

Go to Date : option takes you to a particular date to see the reminders for that date

Weekly : For weekly view of your schedules.

Daily : For daily view of your schedules.

Volume Settings

This function makes it easy for you to manage the various volume settings in your phone.

You can manage your ringer type, volume, tone, message tone & keypad tone here.

Use up & down arrow key to increase or decrease volume or the dedicated volume change key on the right side of the easyfone.

Delete All Inbox Messages

This feature allows you to delete all the messages in the inbox folder in one single step.

Photo Speed Dial

This Unique feature helps you save upto 8 contacts with photographs. Photo contacts can be seen by using the down arrow key on the keypad. To dial a person whose photo is appearing on the screen, the User simply has to press the dial key & the call will be made.

How to save photo contacts ?

1. Go to QuikMenu, then select photo speed dial settings. Press Ok
2. Now Press Options & then Edit
3. Add name and mobile number
4. Press Options to select Caller picture. You can do this by selecting image from your file or by capturing a new picture through the camera.
5. Once done, press save.

easyfone menu features

This section provides details of the menu features like
Contacts(Phonebook), Messaging, Call logs, Multimedia, SOS, Settings & Tools.

Other Menu features

The following pages carry details of the menu features. The main menu has the following options at the first level

- **Contacts:** For phonebook 300 contacts.
- **Messaging:** To send & receive messages
- **Call Logs:** To view call logs of received, dialled & missed calls
- **Multimedia:** Access Audio Player, Camera & Images, FM radio & My files.
- **SOS:** Configure SOS status, SMS, Number list & SOS message
- **Settings:** Manage setting relating to the Phone, call, display, Volume, network & security(Blacklist & Whitelist).
- **Tools:** Reminders, Calculator & Alarm

Contacts (300 contacts)

You can add upto 300 contacts in your phonebook.

Press **Menu**, press **OK** to enter '**Contacts**'

Press **Options** to get the following

- **New** - add new contact
- **Write message** - write & send text messages
- **Edit** - to edit the selected contact
- **Call** - to call the selected contact
- **Delete** - to delete the contact
- **Delete multiple** - to select & delete multiple contacts
- **Import/Export** - use this option to copy your contacts from phone to memory card or vice versa.
- **Others** - to set speed dial numbers and check contact memory status

Add new contact – to add new contacts

- Press **Menu**, press **OK** to enter '**Contacts**'
- Press **Options** & Select **New**.
- Press **OK** and then as per your preference save contact **To Phone** or **To SIM1/SIM2**.
- Press **OK** to choose the appropriate storage.
- Input Name, Number as desired, press **Save** and then press **OK** to save the number.
- Select **Cancel** in case you have filled incorrect details.

Viewing contacts

Scrolling down enables the user to see all saved contacts.

Press centre key to view any contact details like name & number.

Further press '**Options**' to

Edit - to edit contact details

Call - to call the contact

Write messages - to send text message

Delete - to delete the contact

Copy - to copy contact details to the SIM or the easyfone

Messaging

- **Write message**
- **Inbox:** to view received messages.
- **Outbox:** This shows failed messages that have not been sent.
- **Drafts:** You can store a message as a draft message & send it later at your convenience
- **Sent messages**
- **Delete messages**
- **Templates:** To view & use set template messages.
- **Settings:** This option allows you to change the settings of the text messages
- **Message Capacity:** To check status of messages memory used.

Call Logs

To view the history/ list of

- **Missed calls**
- **Dialled calls**
- **Received calls**
- **Rejected calls**
- **Delete all** - You can delete all calls logs or call logs for any of the above categories.
- **Call timers**

You can also check call logs by pressing the green button. In the call list you can toggle by using 'Left/Right' or '4' & '6' key to access & switch between missed, dialed, received & rejected calls.

Multimedia

This contains the following

1. **Camera**
2. **Image Viewer** – to view any images that you have saved.
3. **Audio Player** – to listen to your favourite music
4. **FM Radio**
5. **My files** - to access storage/ memory card.

SOS

Your easyfone comes with a dedicated SOS key which enables you to seek help from family & friends in case of an emergency and save precious time.

When the SOS key is pressed continuously for 3 seconds, the easyfone automatically

1. Raises an alarm by playing a siren sound to alert people in close proximity to you. (You will see a reverse countdown of 5 secs on your easyfone screen, during which you can stop the SOS process by pressing cancel in case the SOS key is pressed by mistake).
2. Automatically sends a SOS message to your emergency contacts.
3. Calls the emergency contacts one by one. Dialing is repeated till the call is answered – with a maximum of 3 times.

Please note that phone will not get into emergency mode if SOS is aborted at any time by pressing the Cancel button.

SOS feature has the following settings:

SOS Status - Use this to activate the SOS feature. SOS will not get triggered if this stays deactivated.

SMS Status - Use this to activate the SOS SMS sending feature. SMS will not be sent if this stays Off.

Emergency Number list - You can add upto 5 emergency contact numbers. These contacts get a call & SMS when SOS is activated.

SOS Message - Edit & personalise the message which will be sent during emergency

Settings:

This enables you to customize the settings. Press Ok to enter into Settings.

Call Settings: In this, the options are

- **Dual SIM** - Settings for dual SIM
- **Call divert** - This re-routes your calls to another specified number when your number is busy, not reachable etc. Default setting is off.
- **Call waiting** - This alerts you & puts an Incoming call on wait in case you are already talking to someone. Default setting is Off.
- **Others** - Select to activate
 - Call time reminder
 - Auto redial
 - Vibration when connected
- **Reply SMS after reject**

Phone settings:

- **Date & Time:** Let's you adjust date & time settings according to your preferences.
- **Language:** The default Language is English. You can change this to Hindi, Tamil, Telugu, Malayalam, Kannada or Bengali
- **Restore factory settings:** Pls enter password (1122) to revert back to original easyfone factory settings. Pls note that when you restore factory settings, your phonebook, photo contacts, sos settings, blacklist & whitelist will NOT be reset.

Display: This lets you set the wallpaper, contrast, backlight, keypad backlight, auto keypad lock settings.

Security settings - Configure Blacklist & Whitelist here...(refer page 40 & 41). You can also set privacy password & lock screen key

Volume settings (refer page 24)

Network Selection - This function helps you to select the operators network through automatic or manual mode. The default setting for this is Automatic.

Human Voice Keytone - Select to switch ON/OFF human voice keytone from here.

Blacklist

This feature gives you the capability to blacklist a number prevent it from calling you & sending messages. Select to tick the mode to “On” if you wish to activate this feature. Then subsequently add black list numbers. You can add upto 50 numbers here.

Pls note that this is a special phone feature & is not associated with your SIM.

Whitelist

This feature allows incoming calls & messages only from the numbers (maximum of 50) which have been put in the whitelist. This feature is particularly useful for seniors who want incoming calls only from a select close group of people & avoid pesky tele marketing calls.

Important - The Blacklist & whitelist work on Incoming calls only and do not restrict the user from calling anyone. If both blacklist & white list are activated simultaneously, then whitelist overrides the blacklist

Tools

This contains the following

1. **Reminders** (refer page 21)
2. **Calculator**
3. **Alarm** - Set upto 5 alarms. To set an alarm
 - Select **Alarm** and press **OK**. Press **Edit** to select status on/off. Press "4" & "6" or left/ right key to switch it OFF /On.
 - Enter the time
 - Scroll to select repeat times & Alert type. You can define the frequency & days for a alarm. You can also set the alarm tone.
 - Press **Save** to activate the alarm.

Warranty

Your easyfone comes with a limited 12 month warranty for the handset and 6 months for the charger and the battery for any manufacturing defects.

Please visit our website www.easyfone.in to view the detailed terms and conditions.

Section 4

Safety, Care & Precautions

Extremely Important. Please read carefully

Safety, Care & Precautions

- Please charge the battery fully before you use your phone for the first time.
- Use only the manufacturers authorized adapter/charger to charge your easyfone. Do not overcharge your easyfone by keeping it continuously on the charger. Do not use chargers/ adapters with a different specification & output rating to charge your easyfone. Not following these instructions is likely to impair the life of your battery and/or damage it/ make it bloat and will make the warranty VOID.
- Replace the battery with an authorized battery from the manufacturer only in case your battery needs replacement/ gets bloated.

- Do not remove the battery from the device while it is being charged. Do not crush, puncture, short external contacts or dispose in fire or water. Do not expose the battery to temperatures above 50° C.
- Recycle or dispose used battery as stipulated by local regulations to protect the environment.
- Do not dismantle the easyfone and/or accessories. Get your easyfone repaired by manufacturer authorised personnel only. Please use parts provided by the manufacturer only. Not following this will make your easyfone warranty void.
- Keep your phone & accessories out of reach of small children & animals.
- Do not use your phone while driving.
- Do not use the phone if the screen is cracked

or broken as this could injure your hands and/or face.

- Keep your easyfone away from liquids. Switch off the phone before cleaning it. Do not use chemicals or cleaning solutions to clean the easyfone.
- Use of mobile phones in certain areas/ places/ conditions can be hazardous. Switch off your phone inside aircrafts, in hospitals In areas where chemicals are used, in Fuel/- Gas stations; In and around areas having electrical/electronic equipments; in Areas where any kind of blasting activity is being carried out.
- Avoid exposing your easyfone and/or batteries to extreme temperatures. Extreme temperatures reduce the charging capacity and life of batteries & mobile phones.

E-waste (Management)

At easyfone we understand that our responsibility doesn't end at selling you our products. easyfone has been working in the area of safe disposal of electronic waste. Since mobiles and other electronic items are made of hazardous constituents, we seek your cooperation in reducing the environmental impact of our products.

Please contact us on www.easyfone.in/e-waste to help dispose your easyfone in an environment friendly way as per our e-waste policy & in conformance with the legislation passed by the Ministry of Environment and Forests (MoEF & CC) called E-waste (Management) Rules, 2016, which comes into effect from 1st Oct 2016.

For assistance or service support
contact us at

 **88006 88007** (10am-5pm on weekdays)

 **support@easyfone.in**

 **A24/21, Deodar Marg, DLF Phase 1,
Gurgaon, Haryana - 122002**