



Sunrise Alarm Clock User Manual

Thank you for choosing our product.
Please read the user manual before using the device.

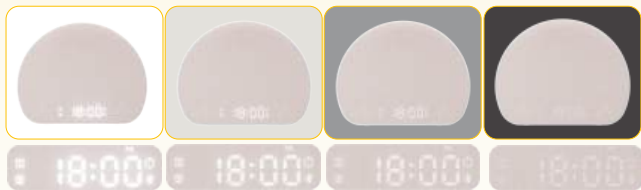


No manual adjustment of the time display brightness is required. The device features built-in light-sensing technology that automatically adjusts the brightness of the time display based on ambient light intensity.

Appearance

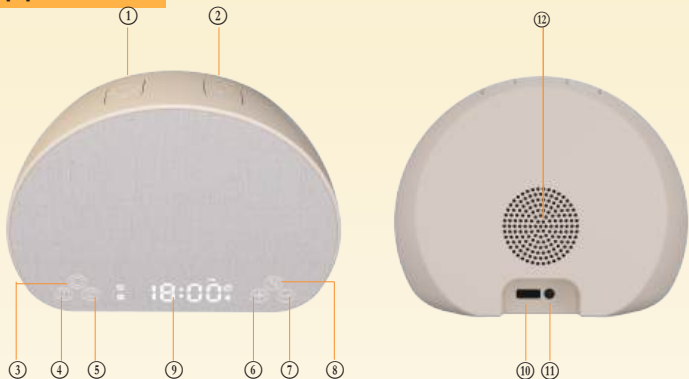

Button Descriptions	Single-press	Double-press	Long-press
① Lights Switch	On/Off	Switch Lights	Adjust Brightness
② Sounds Switch	On/Off	Switch Sounds	Adjust Volume
③ Clock Settings	Enter Settings/Confirm	/	/
④ Alarm 1 Settings	Enter Settings/Confirm	/	On/Off
⑤ Alarm 2 Settings	Enter Settings/Confirm	/	On/Off
⑥ Adjustment Key+	Time Adjustment+ / Alarm Adjustment+ / Light Switching+ / Sound Switching+	/	Stepless Adjustment+
⑦ Adjustment Key-	Time Adjustment- / Alarm Adjustment- / Light Switching- / Sound Switching-	/	Stepless Adjustment-
⑧ Timer / Bluetooth	Timer On / Timer Off	/	Bluetooth On/Bluetooth Off
⑨ Display Panel	/		
⑩ USB 5V Output	External device charging port		
⑪ DC 5V Input	/		
⑫ Speaker	/		

Remote Control Function

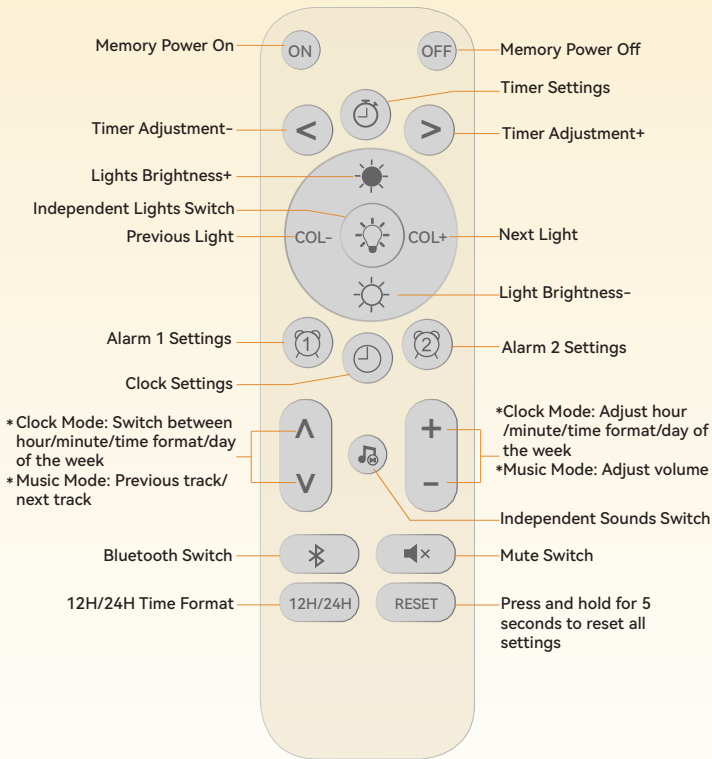


Wireless radio frequency remote controller


Lighting Function

Key operation steps:

Press "☀️" to turn the lights On/Off, double-press "☀️" to switch lights. When double-pressing "☀️" switches lights, the interface displays: "C-XX". At this point, you can use "⊕ ⊖" to switch the lights. Long-press "☀️" to adjust light brightness.




Remote control operation steps:




Sound Features

Key operation steps:

Press "🎵" to turn the sounds ON/OFF, double-press "🎵" to switch sounds. When double-pressing "🎵" switches sounds, the interface displays: "S-XX". At this point, you can use "⊕ ⊖" to switch the sounds. Long-press "🎵" to adjust the volume.

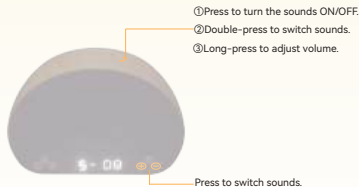

Remote control operation steps:



Time Settings

1. Automatic Adjustment: In Bluetooth mode, no manual adjustment is required; the clock is automatically calibrated.

* Please allow Bluetooth to access device information (required only for Android devices; iOS devices automatically obtain access).

Step 1 Long-press “” for 2 seconds to turn on Bluetooth. You will hear “Bluetooth On”, indicating that Bluetooth is enabled.

Step 2 Connect to the Bluetooth device named “YMX1021” using your phone. Upon hearing “Bluetooth Connected,” the connection is successful.

Long-press for 2 seconds to turn on Bluetooth.



The icon is flashing.



The icon remains lit after a successful connection.

2. Manual Adjustment

Key operation steps:

Step 1 Press “”, the “Hour” will blink, then press “” or “” to adjust to the correct number;

Press “Clock” button.



Press “+” or “-” to adjust to the correct number.

Step 2 Press “” again, the “Minute” will blink, then press “” or “” to adjust to the correct number;

Press “Clock” button.



Press “+” or “-” to adjust to the correct number.

Step 3 Press “” again, the “Time Format” will blink, then press “” or “” to adjust between 12-hour and 24-hour format;

Press “Clock” button.



Press “+” or “-” to adjust between 12-hour and 24-hour format.

Remote control operation steps:

Step 1 Press “”, the “Hour” will blink, then press “” to adjust to the correct number;

Press “Clock” button.



Press “+” or “-” to adjust to the correct number.

Step 2 Press “”, the “Minute” will blink, then press “” to adjust to the correct number;

Press “Toggle” button.



Press “+” or “-” to adjust to the correct number.


Step 3 Press “” again, the “Time Format” will blink, then press “” to adjust between 12-hour and 24-hour format;

Press “Toggle” button.




Press “+” or “-” to adjust between 12-hour and 24-hour format.

Step 4 Press "⌚" again, the "Week" will blink, then press "+" or "-" to adjust to the correct date;




Step 5 Wait for the blinking to stop after 8 seconds, or press "⌚" again to quickly confirm. The screen will stop blinking, indicating that the settings are complete.



Step 4 Press "⌚" again, the "Week" will blink, then press "⌚" to adjust to the correct date;



Step 5 Wait for the blinking to stop after 8 seconds, or press "⌚" again to quickly confirm. The screen will stop blinking, indicating that the settings are complete.




Wake-up Alarm: Set an Alarm / Cancel an Alarm


Scenario 1: "I want to set the Alarm 1 for 7:30 AM on weekdays. I want to use the 4th sound. I want the alarm volume to be at level 10. I want the wake-up light to start activating 30 minutes in advance".

Key operation steps:


Step 1 Press "⌚", the "Hour" will blink, then press "+" or "-" to adjust to 7 AM;




Step 2 Press "⌚" again, the "Minutes" will blink, then press "+" or "-" to adjust to 30;



Step 3 Press "⌚" again, the "Week" will blink, then press "+" or "-" to switch to weekdays;



Step 4 Press "⌚" again, the "Sound Option" will blink, then press "+" or "-" to switch to S-04;



Remote control operation steps:

Step 1 Press "⌚", the "Hour" will blink, then press "⌚" to adjust to 7 AM;



Step 2 Press "⌚", the "Minutes" will blink, then press "⌚" to adjust to 30;




Step 3 Press "⌚" again, the "Week" will blink, then press "⌚" to switch to weekdays;




Step 4 Press "⌚" again, the "Sound Option" will blink, then press "⌚" to switch to the S-04;



Step 5 Press “⏰” again, the “Volume Option” will blink, then press “+” or “-” to adjust to U-10;



Step 6 Press “⏰” again, the “Wake-up Time” will blink (with the light on), then press “+” or “-” to adjust to 30;



Step 7 Wait for the blinking to stop after 8 seconds, or press “⏰” again to quickly confirm. The “⏰” icon will light up on the screen, indicating the setting is successful.



Step 5 Press “⏰” again, the “Volume Option” will blink, then press “+” or “-” to adjust to U-10;



Step 6 Press “⏰” again, the “Wake-up Time” will blink (with the light on), then press “+” or “-” to adjust to 30;




Step 7 Wait for the blinking to stop after 8 seconds, or press “⏰” again to quickly confirm. The “⏰” icon will light up on the screen, indicating the setting is successful.




Scenario 2: “I want to set the alarm 2 for 10:00 AM on weekends, and I only need the light to wake me up 10 minutes in advance”.

Key operation steps:


Step 1 Press “⏰”, the “Hour” will blink, then press “+” or “-” to adjust to 10 AM;



Step 2 Press “⏰” again, the “Minute” will blink, then press “+” or “-” to adjust to 00;




Step 3 Press “⏰” again, the “Week” will blink, then press “+” or “-” to switch to the weekends;



Remote control operation steps:


Step 1 Press “⏰”, the “Hour” will blink, then press “+” or “-” to adjust to 10 AM;




Step 2 Press “+” or “-”, the “Minute” number will blink, then press “+” or “-” to adjust to 00;



Step 3 Press “+” or “-” again, the “Week” will blink, then press “+” or “-” to switch to the weekends;




Step 4 Press “⌚” again, the “Sound Option” will blink, then press “+” or “-” to switch to S-00;




Press “+” or “-” to switch to S-00.

Step 5 Press “⌚” again, the “Wake-up Time” will blink (with the light on), then press “+” or “-” to switch to 10;



Press “+” or “-” to adjust to 10.

Step 6 Wait for the blinking to stop after 8 seconds, or press “⌚” again to quickly confirm. When the “⌚” icon lights up on the screen, it indicates that the setting is successful.



“Alarm 2” icon lights up.

Step 4 Press “⏮” again. The “Sound Option” will blink, then press “⏮” to switch to S-00;



Step 5 Press “⏮” again. The “Wake-up Time” will blink (with the light on), then press “⏮” to switch to 10;



Step 6 Wait for the blinking to stop after 8 seconds, or press “⏮” again to quickly confirm. When the “⏮” icon lights up on the screen, it indicates that the setting is successful.



Scenario 3: “The alarm clock is ringing. I want to turn it off”.


Key operation steps:

Press any button to turn off the alarm.



Remote control operation steps:

Press any button on the remote to turn off the alarm.



Scenario 4: "The alarm is ringing. I want to snooze for 10 minutes."

Key operation steps:

Tap the alarm body to activate the snooze mode.



Remote control operation steps:


/

Scenario: 5 “I want to cancel the alarm / I want to restore the alarm.”

Key operation steps:

Long-press “” / “”, the “” / “” icon on the screen will turn off, indicating that the alarm has been canceled.

Long-press “” / “”, the “” / “” icon on the screen will light up, indicating that the alarm has been restored.



Remote control operation steps:

Long-press “” / “” until the “” / “” icon on the screen turns off, indicating that the alarm has been canceled.

Long-press “” / “” until the “” / “” icon on the screen lights up, indicating that the alarm has been restored.




About Timer

Scenario 1: “I want to set the 5th sound with the volume level 10, and the 10th light with the brightness level 8. I want to set the timer for 2 hours”.

Key operation steps:

Step 1 Press “” to turn on the sounds, double-press “” or press “” or “” to switch to the 5th sound. Long-press “” to adjust to the volume level 10;

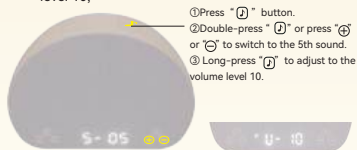

Step 2 Press “” to turn on the lights, double-press “” or press “” or “” to switch to the 10th light. Long-press “” to adjust to the brightness level 8;

① Press “” button.


② Double-press “” or press “” or “” to switch to the 10th light.

③ Long-press “” to adjust to the brightness level 8.




Remote control operation steps:


Step 1 Press “”, then press “” to switch to the 5th sound, and press “” to adjust to the volume level 10;




Step 2 Press “”, then press “” to switch to the 10th light, and press “” to adjust to the brightness level 8;




Step 3 Press “”, then press “” or “” to adjust the time to 2 hours;



Step 4 Wait for the blinking to stop after 8 seconds, or press “” again to quickly confirm. The “” icon on the screen will remain lit, indicating that the setting is complete.



Step 3 Press “”, then press “” or “” to adjust the time to 2 hours;




Step 4 Wait for the blinking to stop after 8 seconds, or press “” again to quickly confirm. The “” icon on the screen will remain lit, indicating that the setting is complete.



Scenario 2: “I want to turn off the timer in advance.”


Key operation steps:

Before the timer expires, press “”. The “” icon on the screen will turn off, indicating that the timer has been successfully canceled.



Remote control operation steps:

Before the timer expires, press “”. The “” icon on the screen will turn off, indicating that the timer has been successfully canceled.



About Bluetooth

Scenario 1: "I want to connect the Bluetooth / disconnect the Bluetooth."

Key operation steps:

- Step 1** Long-press . You will hear the voice prompt: "Bluetooth ON", and the  icon on the screen will light up;




- Step 2** Connect to the Bluetooth device named "YMX1021" using your phone. Upon hearing "Bluetooth Connected", the connection is successful;

- Step 3** Long-press  until you hear: "Bluetooth OFF". The  icon on the screen will turn off, indicating that Bluetooth has been disconnected and turned off.



Remote control operation steps:

- Step 1** Press . You will hear the voice prompt: "Bluetooth ON", and the  icon on the screen will light up;



- Step 2** Connect to the Bluetooth device named "YMX1021" using your phone. Upon hearing "Bluetooth Connected", the connection is successful;

- Step 3** Press  , and you will hear: "Bluetooth OFF". The  icon on the screen will turn off, indicating that Bluetooth has been disconnected and turned off.



About Charging Your Device



When the device is powered on, it can charge external 5V devices.

Parameters

Model	YMX-1021
Bluetooth Name	YMX1021
Input Voltage	AC100~240V~50/60Hz(US) AC220~240V~50/60Hz(EU)
Output Voltage	DC5V/2A
Power	10W
Material	ABS+PC+Fabric
Timer	0.5H/1H/2H/3H/4H/5H/6H/7H/8H
Lighting Type	RGBW
Light Intensity	20 levels
Lighting Mode	15 groups
Volume Level	32 levels
Display Brightness	Automatic Sensing Adjustment
Number of Alarms	2 groups
Music Mode	Local Music + Bluetooth Music
Sound Effects	9 white noise tracks + 19 nature sounds + 8 music tracks + 1 classic alarm tone
Sleep Aid Sounds	9white noise tracks +19nature sounds+8 music tracks
Sunrise Simulation Duration	5/10/20/30/40/50/60 minutes
Alarm Mode	Lighting & Sound Effects, Lighting Only
Alarm Duration	10MIN
Snooze Time	10MIN
Snooze Count	5 times
Operating Temperature	0°C~40°C (32°F~104°F)
Waterproof Rating	IP20
Product Dimensions	Length: 18 cm Height: 14.5cm Thickness: 8cm

Caution

- * This product's bracket is a fragile component. Please handle with care during installation and removal;
- * Place the product on a stable, horizontal, and non-slippery surface;
- * Do not use the product in rooms where the temperature is below 0°C or above 40°C;
- * Do not rely on this product to reduce your need for sleep. Its primary function is to assist in waking up more easily, not to decrease your natural sleep requirements;
- * This product is intended for household use only, including hotel use;
- * Please wipe this product with a soft cloth;
- * Do not use abrasive cleaners, expanding pads, or solvents such as alcohol or acetone, as these may damage the product surface;
- * Store the product in a safe, dry location where it will not be crushed, bumped, or damaged;
- * When storing products, do not wrap the power cord around the appliance.