


产品名称:	981说明书
规格结构:	(三折页80mm*94mm，如有不符，请按实际情况调整后打样确认)
材质工艺:	单色印刷



Indicator description

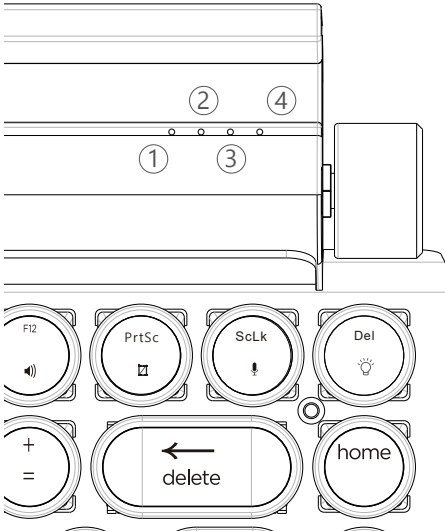


① MODE INDICATOR
WIRED MODE:The indicator is red
Turn the switch to USB position,the typewriter use USB Type-C cable connect with PC/Laptop,it is wired mode.Tips: In wired mode,the first indicator light will not light up if you connect the keyboard with computer without the charging cable in our packing.
BLUETOOTH MODE:The indicator is blue
Turn the switch to BT position,press FN and Q/W/E keys and hold for 5 seconds, the first indicate keep blue flashing at this time, then open the bluetooth switch in the device to finish pairing.
OFF(Turn off the power)
Turn the switch to OFF positon


② WIN LOCK INDICATOR
Press FN+WIN key is the windows lock key switch.The light is blue when Win Lock Function is open,and Win key have no function at the same time.The light is off when lock key is closed and the Win key recovery function.

③ CAPITALS LOCK INDICATOR(A/a)
Pressing the CAPS key is the caps lock switch.The indicator light is blue when the caps lock funtion is turned on and the light is off when press it again and the CAPS caps lick function is turned off.


④ CHARGING INDICATOR
When the voltage is lower than 3.4V and the indicator light is red and flashing, it means the typewriter need to be charged;the blue light fixed when charging. The light off when it is full.When using individual mobile phone chargers to charge the typewriter,the indicator light will not light up.

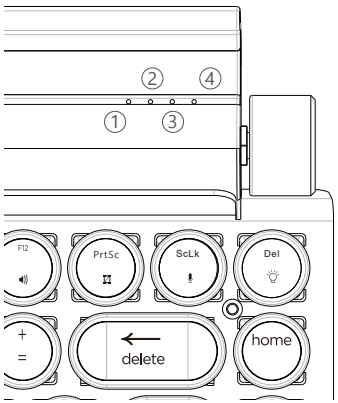

Function description

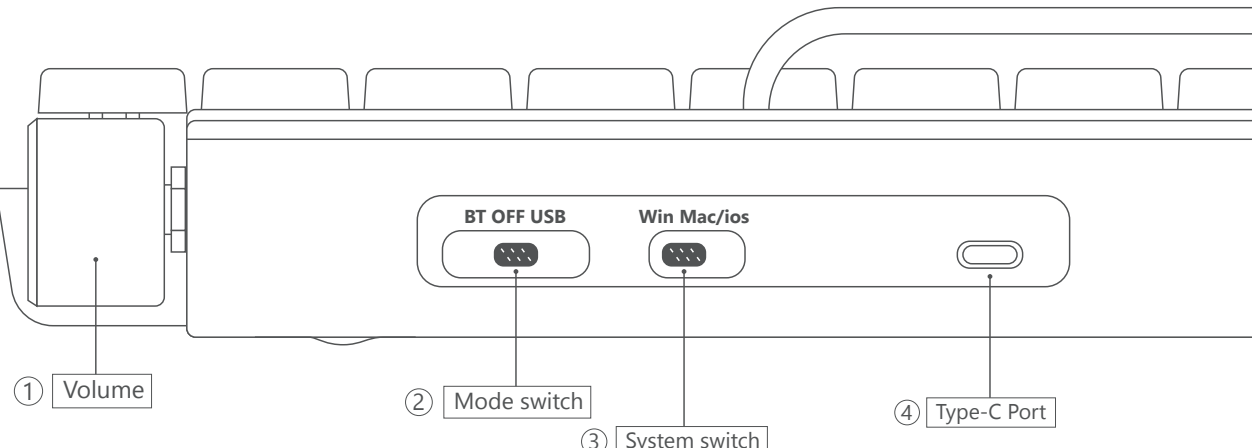

① Volume
② Mode switch
③ System switch
④ Type-C Port

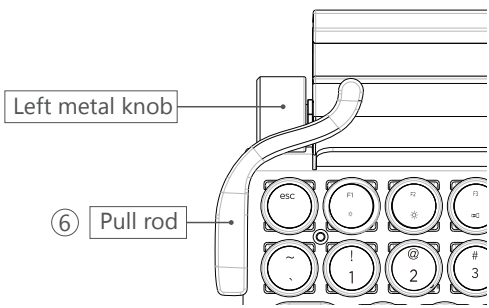

⑤ Left metal knob
⑥ Pull rod

2)Press and hold (3 seconds) FN+Q/W/E to enter the code pairing state. At this time, the first indicator(NO.2①)and Q/W/E key light of the keyboard will flash.
3)Turn on the Bluetooth function of your device, search for"ML-981"and connect. It will keep fixed blue light under BT mode.

How to connect device with wired mode
1)Switch to the"USB"position 2)Connect the keyboard and device with type-c cable in the packing.


③ System switch
Windows/Android System Win Mac/ios System Mac/ios System Win Mac/ios System


④ Type-c Charging Port
When the fourth indicator light turns red, it need to be charged with the Type-C charging cable.It normally takes around 6 hours to fully charge.

⑤ Left metal knob--Lightness
Push the metal knob to adjust the brightness of the light

⑥ Pull rod
The pull rod of the electroplating process can switch the backlight mode by pulling the switch.

User Manual of Taiahiro Mechanical Keyboard 981

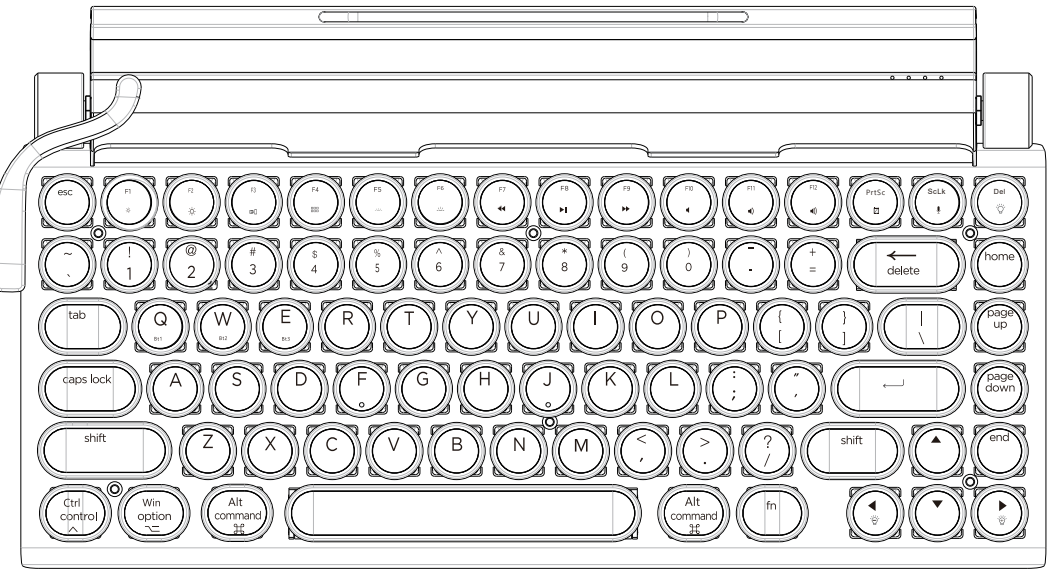

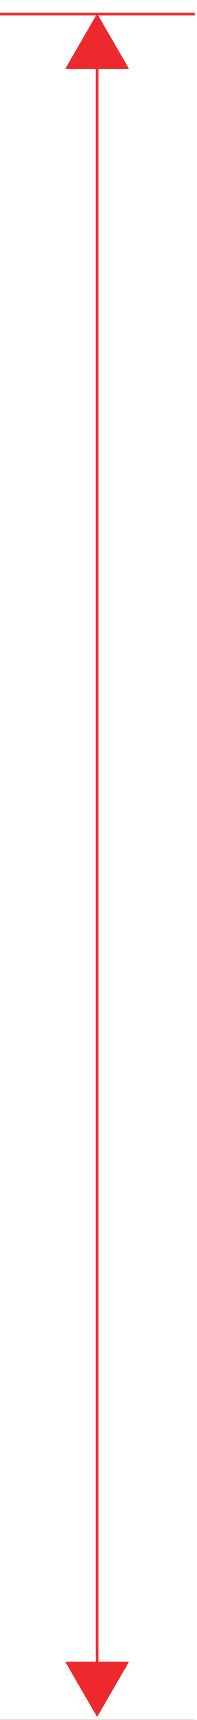

FN combination keys manual

Window/Android		Mac/ios	
FN+F1	My Computer	F1	Screen Brightness-
FN+F2	Search	F2	Screen brightness+
FN+F3	Calculator	F3	Call out all programs
FN+F4	Multimedia	F4	Start interface
FN+F5	Last Song	F5	Keyboard Brightness-
FN+F6	Next Song	F6	Keyboard Brightness+
FN+F7	Pause	F7	Last Song
FN+F8	Stop	F8	Play/Pause
FN+F9	Mute	F9	Next Song
FN+F10	Volume+	F10	Mute
FN+F11	Volume-	F11	volume -
FN+F12	Keyboard Lock	F12	volume +
FN+WIN	WIN Lock	PrtSc	screenshot
		Pause (or)Fn Mac	Start-up Siri

How to use Pause key to start up Siri:MacApple-System Preferences-Siri-Keybaord short cuts-Enter Pause-Finish

Backlight combination keys manual

FN+↑ FN+↓	Adjust the lightness
FN++ FN+-	Adjust the speed of flashing
FN+HOME	Switch the backlight mode
FN+ESC	Press 3 seconds to restore the original design
FN+Del	Backlight ON/OFF

Multi device Bluetooth mode combination keys

① The Bluetooth ofthe three devices is paired and connected to the corre-sponding FN+Q/FN+W/FN+E.(NO.2(2)

② How to switching among 3 devices: Press FN+Q/W/E=Device 1or Device 2 or Device3

Sleep patterns

In the Bluetooth mode, it will enters sleep patterns after 5minutes without press any key.It needs a few secondspause to rework.

Tips:Underfashing backlight state,the lightnessis fixed.The bluetooth function require the device above Bluetooth 4.0and compatible above WIN10 system.

Specifications data:
Number of keys:83(Mechanical Blue Switch)
Number of Multimedia Keys: 12
Materials: ABS &Metal
Battery:2,000mAh
Charging Time: Around 6 hrs
Interface: Type-C
Mode: Bluetooth&Wired
Switch lifespan:>50millions
Keyboard function:All keys anti-ghosting
BT Device Name:981 Mechanical Keyboard
Dimensions:32.5*169*4.3CM
Weight:Approx.1.642lb
Cable length:1.7 meters

What's in the box:
981 Mechanical Keyboard *1
Metal Switch Puller*1
Keyboard Blue Switch*2
Type-C USB Cable*1
User Manual*1
981 Mechanical Keyboard Gift Eco Bag*1

Mechanical Gaming Keyboard

Manufacture: Taiahiro

Address: Room 2802,ZheShang Dasha Nancheng section, Nancheng Street, Dongguan City, Guang-dong Province China,523000

Contact us: service@taiahiro.com

Made in China

