


# Smart Plug User Manual



Model: ET01

## Dear Valued Customers,

We would like to express our appreciation for choosing Eightree and being a part of our community. As an up-and-coming brand established in 2021, we are dedicated to developing and manufacturing high-quality smart home products.

Our mission is to make smart home technology accessible to everyone, regardless of budget or experience. We are committed to providing you with convenient and reliable smart home solutions that make your life easier.

Thank you for being a part of Eightree, and we look forward to continuing to serve you.

We are always happy to help and provide you with prompt support. If you ever need assistance, please feel free to contact us:

[support.us@eighttree.club](mailto:support.us@eighttree.club)

# Catalog

|                                           |    |
|-------------------------------------------|----|
| Before Using                              | 01 |
| Specifications                            | 03 |
| Installation                              | 04 |
| How to Use                                | 10 |
| Third Party Control                       | 13 |
| (Alexa, SmartThings and Google Assistant) |    |
| Troubleshooting                           | 15 |
| Safety Information                        | 16 |

## Before Using

1. This smart plug is only perfectly suitable for traditional electrical equipment, such as buttons, knobs and other control appliances, and is not suitable for remote control or touch screen equipment. This integrated device allows you to remotely control and automate your appliances from your cell phone or smart speaker.
2. If you want to use a smart plug in a remote control or touch screen device, it is only applicable to turn off the device.
3. This smart plug only supports the 2.4GHz network environment. If your home has a dual-band router, it needs to be split into two frequency bands: 2.4 GHz and 5GHz; and when con


necting, please ensure that your mobile phone is only connected to the 2.4GHz network.

4. If you encounter any problems when using the smart plug, you can contact the sales support team at any time: [Support.us@eighttree.club](mailto:Support.us@eighttree.club)
5. If reading this manual is difficult for you, please download the user manual from the Amazon listing for enlarged viewing.

## At a Glance

- Press to turn ON or OFF the smart plug.
- Press and hold (for 5 seconds) until the LED flashes to initiate the app onboarding process or factory reset the smart plug.

Power Button:



## LED Indicator Status:

No light: Power off

Light flashing: Pairing mode

Solid blue light: Power on

## Specifications:

Model Number: ET01

Material: PC+ABS

Rated Voltage: AC 110-240V

Rated Current: 10A

Max. Power: 1100W

Working Temp: -20~50°C

FCC ID: 2A670-ET01

IC ID: 28652-ET01

Wi-Fi Standard: 2.4 GHz Only

Warranty: 2 Years

## Installation:

1. Search and download Smart Life APP in Google Play Store or APP Store. If you cannot find Smart Life APP, please scan the following QR code (It is recommended to use the original camera of your mobile phone to scan);



2. Open the Smart Life APP, create a Smart Life account and log in. If you already have one, please log in directly;
3. Plug the smart plug into the socket;




4. Choose one of the following three connection methods to connect. It is recommended to follow the first one (BLE Mode).

Notice:

- a. Please make sure the distance between the smart plug and the router is within 100ft
- b. Before starting the connection, make sure your mobile phone is connected to the 2.4GHz network only.

## A)BLE Mode (Recommended):

Step 1. Turn on the Bluetooth of your mobile phone and connect your phone to the 2.4GHz Wi-Fi network.




Step 2. Connect the plug to the power source and confirm that the indicator light is blinking.

Step 3. Launch the Smart Life app, the device will be found automatically.



Step 4. Tap Add and enter the name and password of the Wi-Fi network.

Step 5. Wait for connection (may take up to 2 minutes).



## B)EZ Mode:

Step 1. Connect your phone to the 2.4GHz Wi-Fi network.



Step 2. Long press the power button till the indicator flashes quickly (Flashes twice per second).

Step 3. Launch the Smart Life app and tap "Add device".

Step 4. Choose "Socket Wi-Fi" and enter the name and password of the 2.4GHz Wifi Network.

Step 5. Tap "Blink Quickly".

Step 6. Wait for connection (may take up to 2 minutes).



## C) AP Mode

- Step1. Connect your phone to the 2.4GHz Network
- Step2. Long press the power button till the indicator flashes slowly(1 time every 2 seconds)
- Step3. Launch Smart Life APP> Tap Add device>Choose "Socket Wi-Fi">Enter the name & password of the 2.4GHz Wifi Network>Tap "Blink Slowly"
- Step4. Connect your plug to the hotspot named SmartLife-XXXX or SL-XXXX, and back to Smart Life APP
- Step5. Wait for connection(may take up to 2 minutes)

## How to Use

1. Remote control: Turn on/off the device remotely through the mobile phone anytime, anywhere.




## 2. Timer:

Countdown: Set the countdown timer and your smart plug will automatically be toggled after the time ends (e.g., 1: turn on/off the plug after 10 mins);


Schedule: Schedule your smart plug to turn on/off automatically to simplify your daily routine (e.g., 2: turn on the plug at 2:00 p.m. every Sunday);

Circulate: Set your smart plug to automatically turn on/off for a period of time at regular intervals (e.g., 3 minutes on every 5 minutes off during 10:00-20:00 every Sunday);


Random: Turn on/off automatically at random intervals while you are away to create the appearance that someone is at home (e.g., 4: random turning on/off the plug between 10:00-20:00 every Sunday).




1



2



3





4

### 3. Scene:

Turn the plug on/off based on changes in weather, location, or device status, etc.



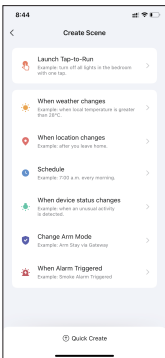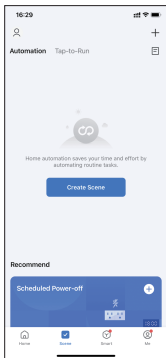


## Third Party Control

(Alexa, SmartThings and Google Assistant)

Step 1. Make sure you have connected the plug to the "Smart Life" App first.

Step 2. Launch the Smart Life app > Click "Me" > Third-party service > Follow the app prompts

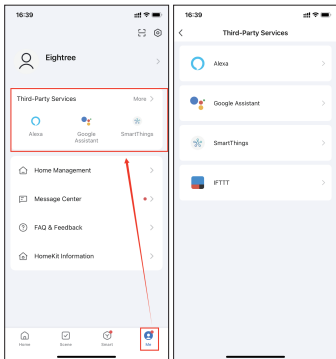

Step 3. You can also scan the QR code below to watch detailed video tutorials



## Troubleshooting

1. Fail to connect to Wi-Fi:
  - Make sure the distance between the smart plug and the router is within 100ft;
  - Check the Wi-Fi connection of the smart plug. (2.4GHz Wi-Fi Only);
  - Make Sure the Wi-Fi name and password you entered is correct.
2. Device Offline
  - Make Sure your Wi-Fi signal is

good and stable;

- Check if the Wi-Fi name or password has been changed.

3. The smart plug can be turned on/off normally, but the connected device does not work

- Manually turn the plug on/off to see if the LED lights up/off normally to eliminate the socket faults;
- Ensure the connected device is compatible and functioning properly.
- Try to reset the smart plug.

If the above tips can't help you, please contact our support team at: [Support.us@eighttree.club](mailto:Support.us@eighttree.club)

## Safety Information

- This device is for indoor use only.
- Do not use this device in wet or damp locations
- Do not use this device with appliances or devices that exceed the rated voltage or current.
- Unplug the device during thunderstorms or if not in use for extended periods.
- Do not disassemble or attempt to repair the device on your own.

## FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party. Responsible for compliance could void the user's authority to operate this equipment. [Example use only shielded interface cables when connecting to computer or peripheral devices].

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

[1] This device may not cause harmful interference.

[2] This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

## IC Warning

-English-This device complies with Industry Canada licence-exempt RSS standard. Operation is subject to the following two conditions: [1] this

device may not cause interference. and [2] this device must accept any interference, including interference that may cause undesired operation of the device.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum [or lesser] gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power [e.i.r.p.] is not more than that necessary for successful communication.

-French-Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: [1] l'appareil ne doit pas produire de brouillage, et [2] l'utilisateur de l'appareil doit accepter tout brouillage radio électrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Selon les règlements d'Industrie Canada, cet émetteur radio ne peut fonctionner qu'à l'aide d'une antenne d'un type et d'un gain maximal [ou moindre] approuvé pour l'émetteur par Industrie Canada. Pour réduire les interférences radio électriques potentielles avec d'autres utilisateurs, le type d'antenne et son gain doivent être choisis de telle sorte que la puissance équivalente rayonnée [p.i.r.e.] ne soit pas supérieure à celle nécessaire pour une communication réussie.

Manufacturer Information:  
Shenzhen Realwe Innovation Technology Co., Ltd Room 411, No. 111-1, Huangjinshan, Bantian Community, Bantian Street, Longgang District, Shenzhen, China, 518129

Made in China



RoHS



CONFORMS TO UL STD. 60730-1  
CERTIFIED TO CSA STD. E60730-1

Intertek  
5012520