




Instruction Manual

USB-C Multi-functional HUB

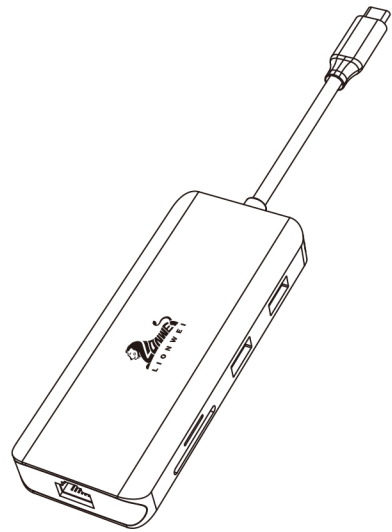


ENGLISH

Product Introduction

This is an alloy multi-function USB-C HUB adapter. It mainly extends the USB-C interface of the source device to HDMI x2, RJ45, USB3.0x2, USB2.0, SD & Micro SD card reader and USB-C charging port.

Note:
The USB-C source devices (mobile/notebook/tablet PC) must support video output.

Structure Diagram

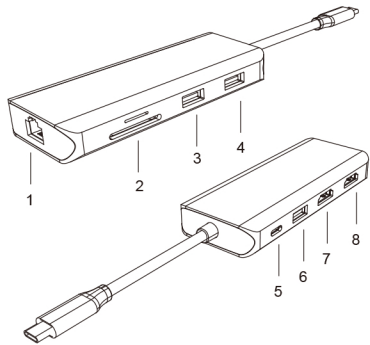


1. RJ45
2. SD / Micro SD
3. USB 2.0
4. USB 3.0
5. USB-C
6. USB 3.0
7. HDMI 1
8. HDMI 2

Features


1. RJ45:
Up to 1000Mbps, stable wired access for high-speed connectivity.
2. SD/Micro SD:
Read: 50-104MB/s, Write: 30-80MB/s,
Data transfer rates are subject to the speed of the memory.
3. USB 2.0:
Up to 480Mbps data speed & maximum power output 5V/0.5A, backwards compatible with USB1.1/USB1.0.
4. USB 3.0:
Up to 5Gb/s data speed & maximum power output 5V/0.9A, backwards compatible with USB2.0/USB1.1.
5. USB-C PD3.0: Upstream charging the source devices such as Laptop/Notebook, Support 100W power in, charging limited to 87-96W for safety, affected by different firmware.
6. USB 3.0:
Up to 5Gb/s data speed & maximum power output 5V/0.9A, backwards compatible with USB2.0/USB1.1.
7. HDMI 1:
4Kx2K 60Hz / 3840x2160 max(work separately while source is DP1.4).
8. HDMI 2: 4Kx2K 30Hz / 3840x2160 max(work separately or simultaneously while source is DP1.2 or above) .

Connection

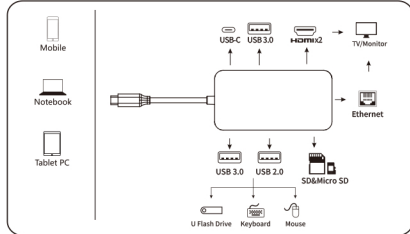


Display Settings for win10

Right click desktop > Display Settings

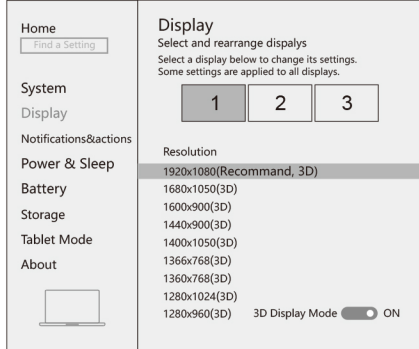



Sound Settings for win10

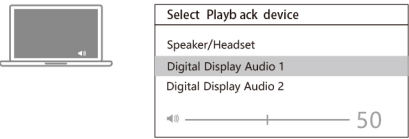

Graphics Settings for win10



1.Clone mode

Right click desktop > Graphics Settings > Display

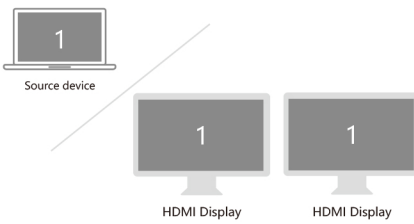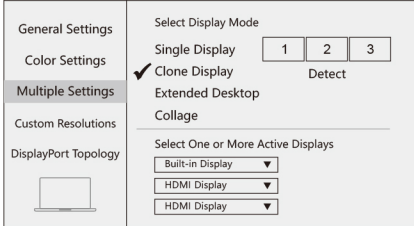



2.Extended Desktop

Right click desktop > Graphics Settings > Display

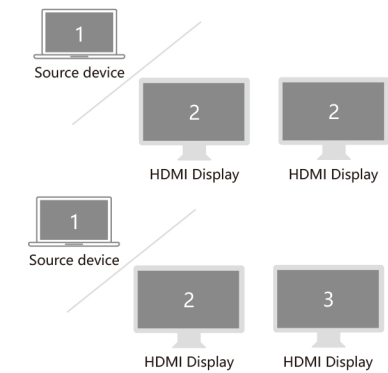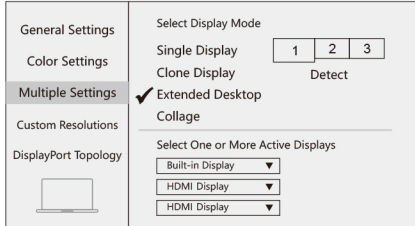


3.Collage

NOTE: For this mode, PC or Notebook's Video card MUST support MST
Right click desktop > Graphics Settings > Display

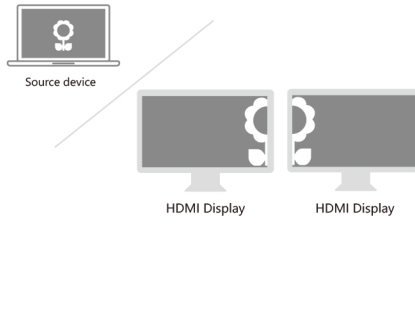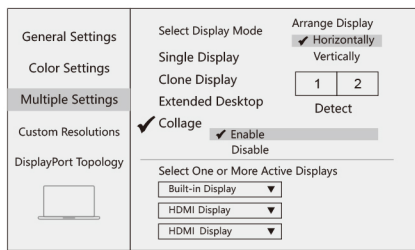


Resolution Setting for Mac

Apple logo> System Preferences> Displays



Sound Setting for Mac



Apple logo> System Preferences > Sound



Graphics Settings for Mac



1.Mirror Display

Apple logo>System Preferences > Displays

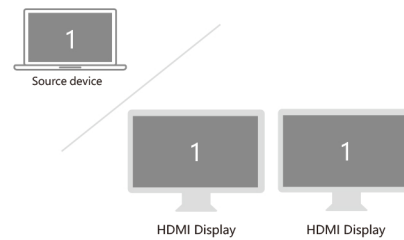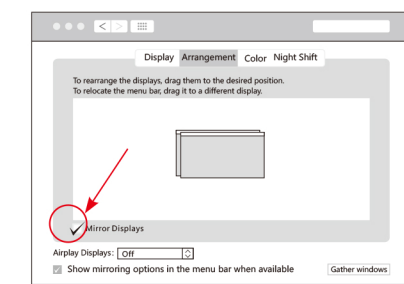

2.Extend Display

Apple logo>System Preferences > Displays

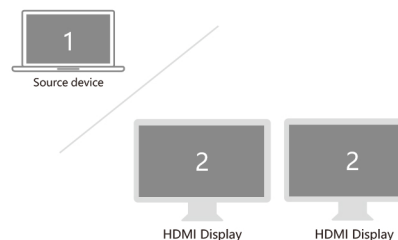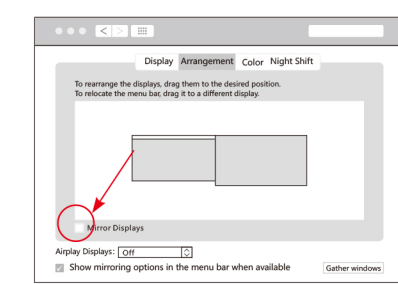

Storage Conditions

Ambient Operating Temperature: 0℃ to 40℃ (32°F to 104°F)
Storage Temperature: -20℃ to 85℃ (-4°F to 185°F)
Ambient Operating Humidity: 20%-90%RH
Storage Humidity: 5%-95%RH

FAQ

- A. Why is there no video output?
1. Pls make sure your USB-C source devices support video output
2. Pls check the connection is good
3. Pls use standard HDMI cable
- B. Why is there no audio output from HDMI port?
1. Pls make sure that there is audio output function on the monitor.
2. Pls set the external monitor as default audio output device.
- C. Sometimes WiFi stopped working while hard disk connected to hub, how to do?
R: 2.4G network is easily disturbed. You can switch to 5G network.
Or you can adjust the placement of the hard disk, move to suitable place.
- D. Win10 system, if one of display does not display, how to do
R: Right click desktop > Graphics Settings > Select One or More Active Displays
- E. If USB driver cannot be identified, how to do?
R: Restart the computer and reconnect the product
- F. If speed is too slow when connect hard disk, how to do?
R1: Plug and pull out for more times
R2: Restart the computer and reconnect the hard disk
- G. If display stopped after connect high current hard disk, how to do?
R: Must be charged. Please supply power by power adapter.