

User Manual of Product 1:

APC UPS Battery Replacement, APCRBC133, for APC UPS Models SMT1500RM2U, SMT1500RM2UC, SMT1500RM2UNC and select others, Black

User Manual of Product 2:

APC UPS Battery Replacement, RBC7, for APC Smart-UPS Models SMT1500, SMT1500C, SMT1500US, SUA1500, SUA1500US, SUA750XL and select others, Black, 1 Count (Pack of 1)

Battery Cartridge Replacement



For information on recycling the used battery, see the Used Battery Information sheet included with the replacement battery.


Back-UPS

BN1250LCD


BR1000-CH, BR1100CI series, BR1200LCDI, BR1300LCD, BR1500LCD, BR1500LCDI
BX900R, BX1200R, BX1300LCD, BX1300LCD-CN, BX1500LCD

DL1000VNT


1 Press release tabs and slide off battery door.

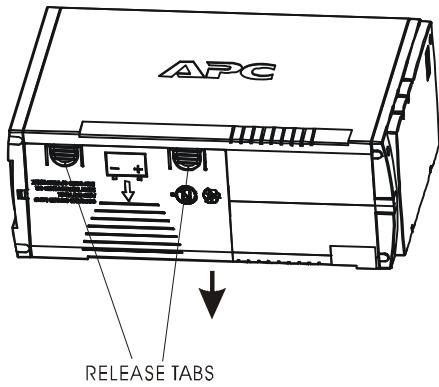


2 Disconnect the battery wires.

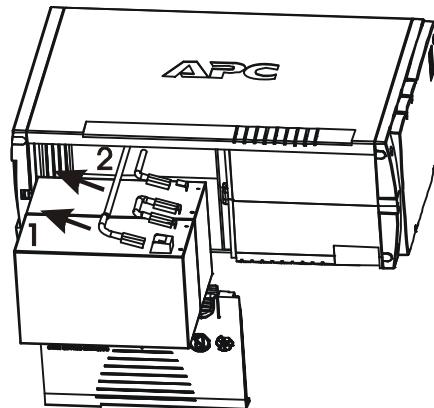


3 Replace with the new battery and the connect the wires.

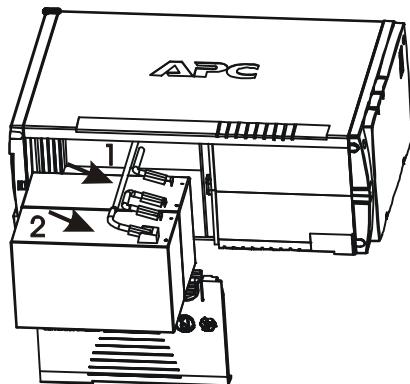


4 Close the battery door.

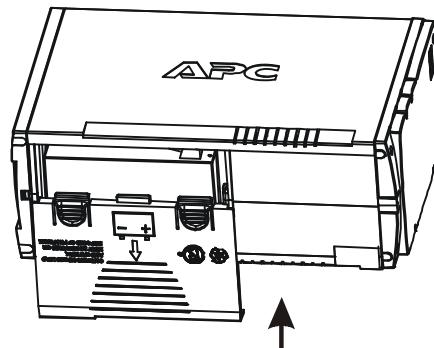


Back-UPS BK 200/500, Back-UPS Pro, Smart-UPS SU 280/420

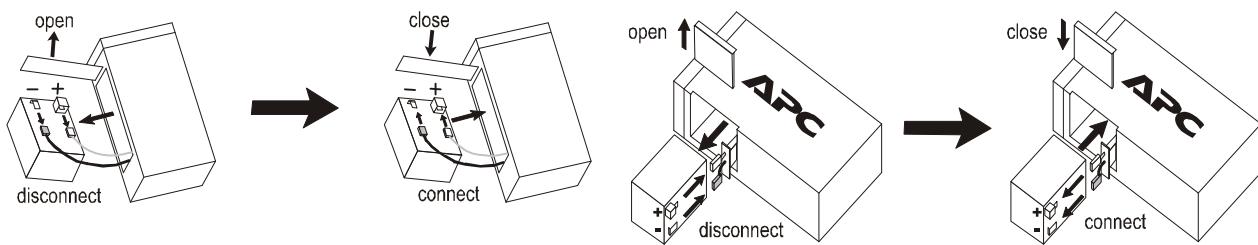


Back-UPS Pro USB 350/500/650

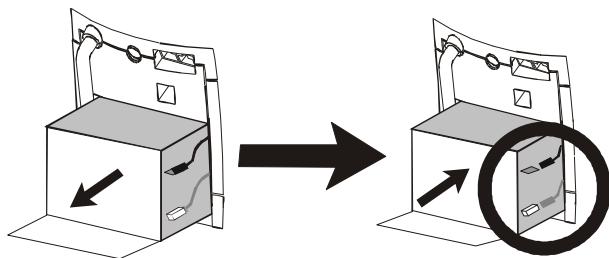

Back-UPS 1000/1400

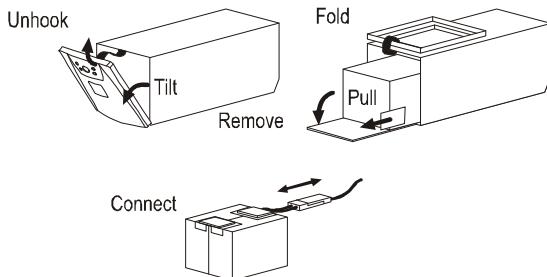


Back-UPS Office 250/500

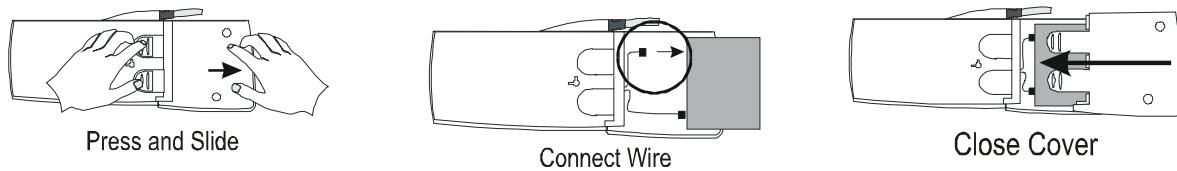


Back-UPS ES350/ES500



remove screw




slide cover off

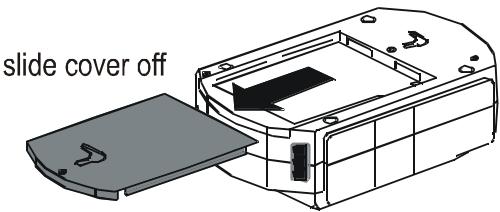

disconnect wires, replace with new battery and reconnect wires.



Close cover and
reinstall screw




Back-UPS ES 500


Back-UPS ES 350/450/550/650/725/750 (120 V)

Back-UPS ES 400/550/700 (230 V)


press release tabs and slide off cover

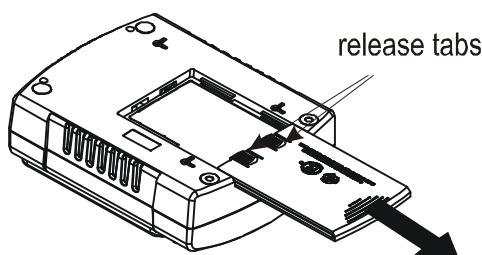

Disconnect wires, replace with new
battery and reconnect wires.





close cover

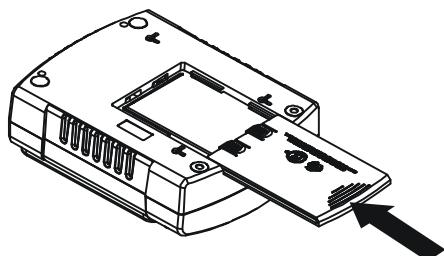


Smart-UPS


Smart-UPS Rack-Mount (5.25 inch models)

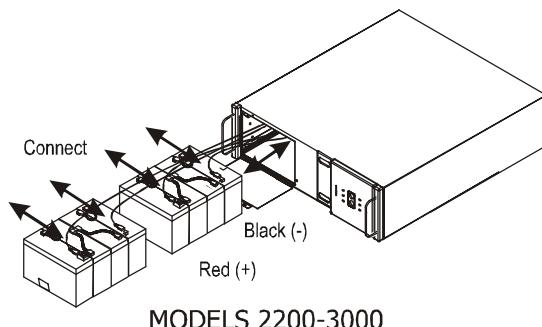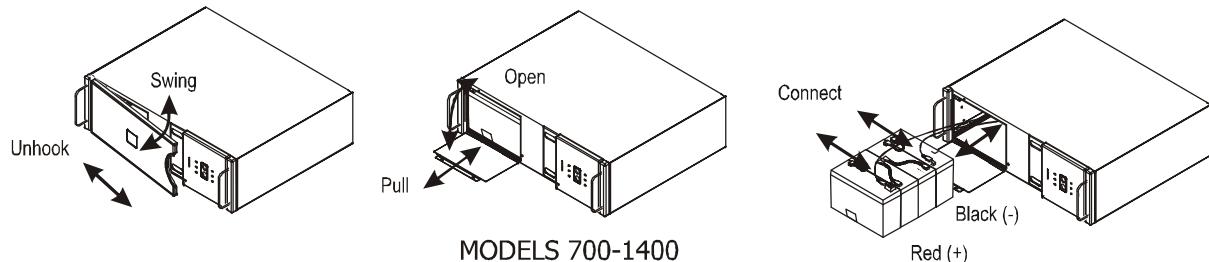


Smart-UPS Rack-Mount (8.75 inch models)

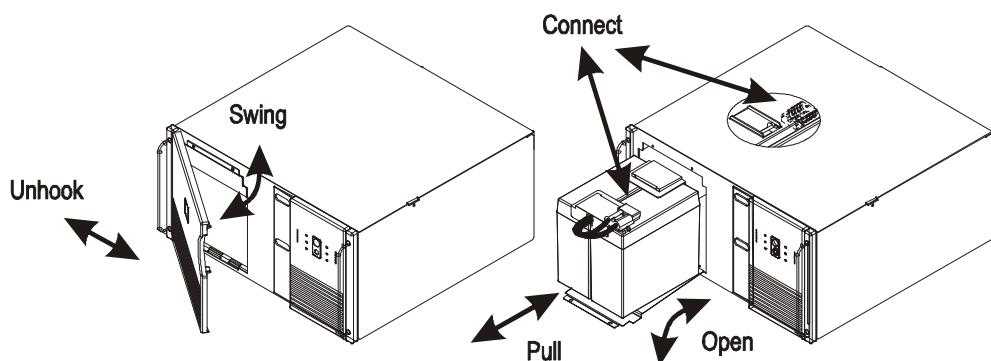


Smart-UPS Rack-Mount XL Battery Packs

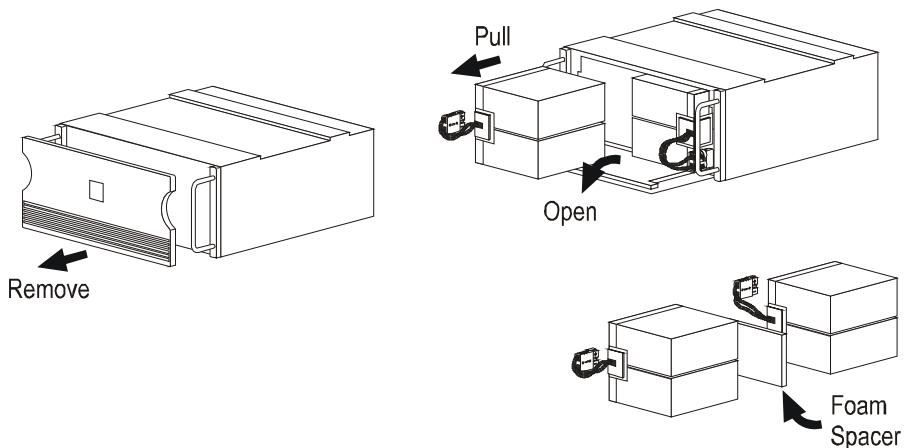


Smart-UPS 2200/3000

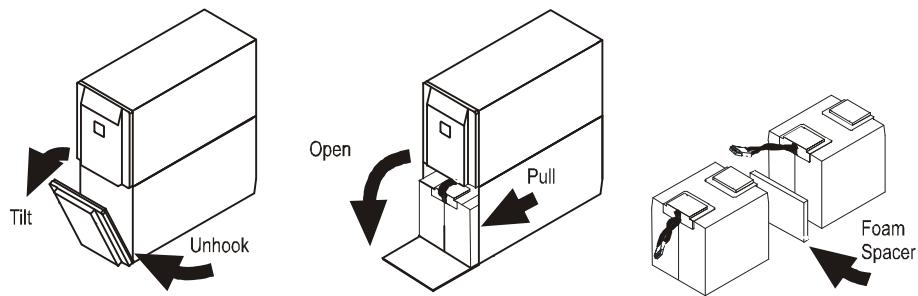


UXBP 24/48/48M

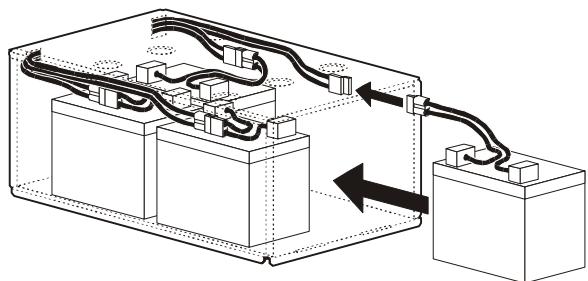

SmartCell XR

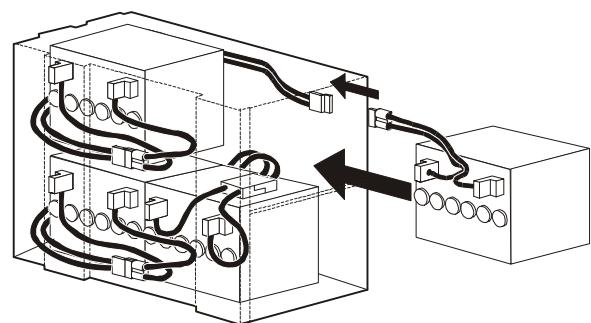


Smart-UPS 450/1500 Smart-UPS XLBP

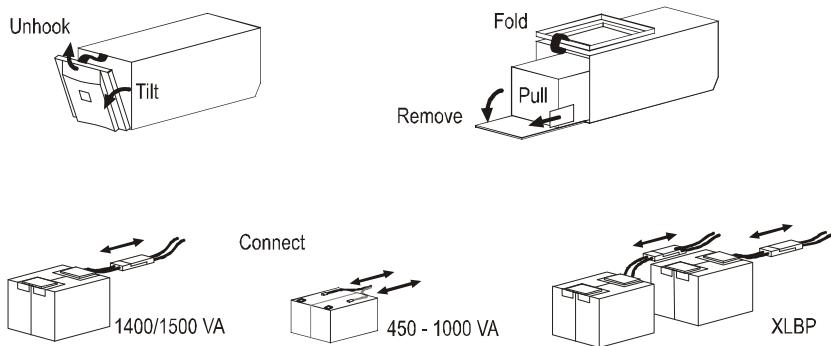


BX800/1100xx-xx


1. To remove the front panel, insert a screwdriver into the notch on the bottom of the unit. Forcefully tap the screw driver to unsnap the front panel off of the unit. Remove the screws from the back panel of the unit.

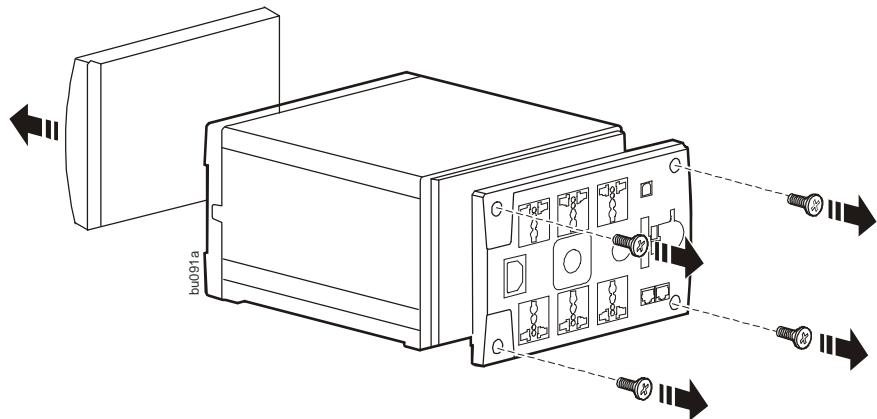

2. Remove the side panels.

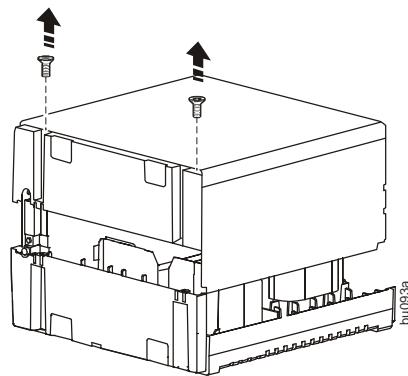


3. Detach the red and black wires from the battery. Remove the old battery and replace with new battery. Reconnect the battery wires, red to the + and black to the -. Reassemble the unit.

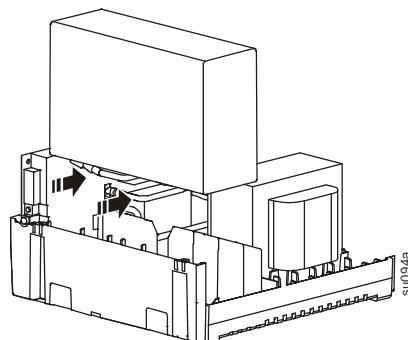


BX650xx-xx


1. Remove screws from bottom of the front panel of the UPS. Slide the front panel upwards to remove it.

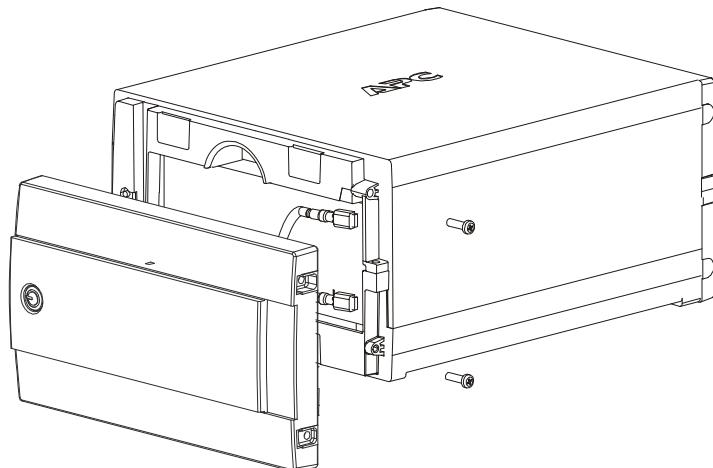

2. Detach the red and black wires from the battery.

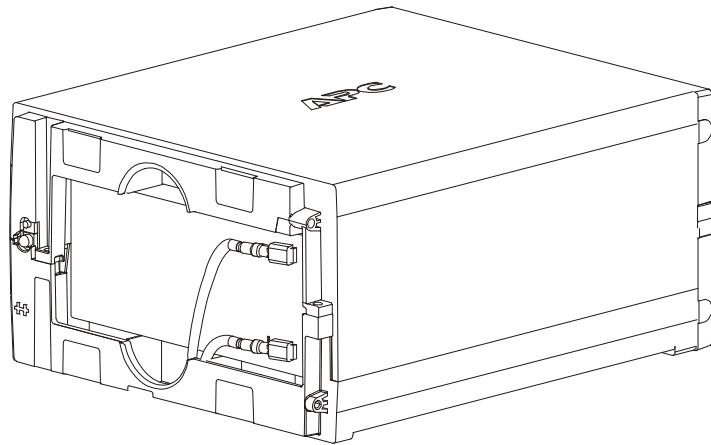

3. Replace with a new battery. Connect the wires: red to the "+" terminal and black to the "-" terminal. Reassemble the UPS.

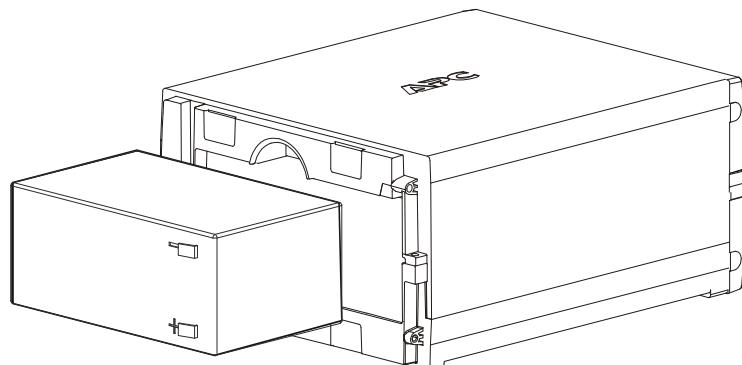

© 2012 APC by Schneider Electric. APC, the APC logo, Back-UPS, and Smart-UPS are owned by Schneider Electric Industries S.A.S., American Power Conversion Corporation, or their affiliated companies. All other trademarks are property of their respective owners.

990-0179L
9/2012

Battery Cartridge Replacement



For information on recycling the used battery, see the Used Battery Information sheet included with the replacement battery.

Back-UPS


BN1250LCD

BR1000-CH, BR1100CI series, BR1200LCDI, BR1300LCD, BR1500LCD, BR1500LCDI


BX900R, BX1200R, BX1300LCD, BX1300LCD-CN, BX1500LCD

DL1000VNT


1 Press release tabs and slide off battery door.

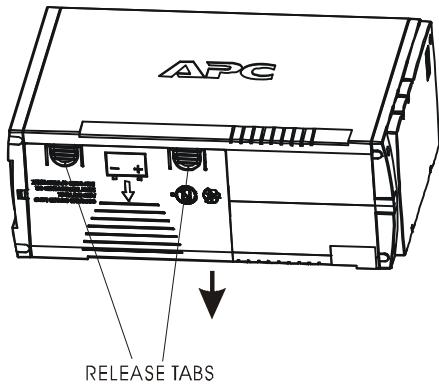


2 Disconnect the battery wires.

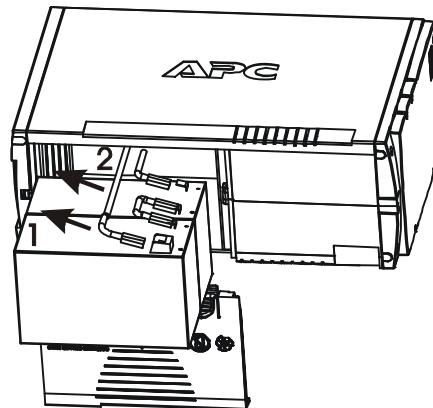


3 Replace with the new battery and the connect the wires.

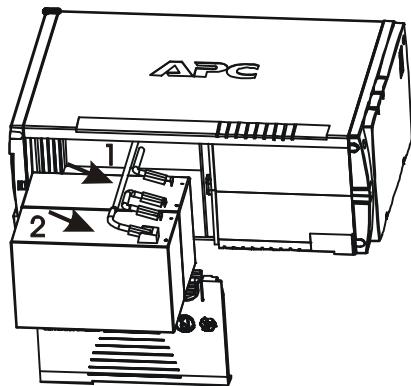


4 Close the battery door.

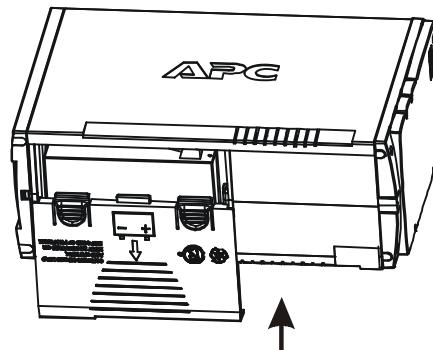


Back-UPS BK 200/500, Back-UPS Pro, Smart-UPS SU 280/420

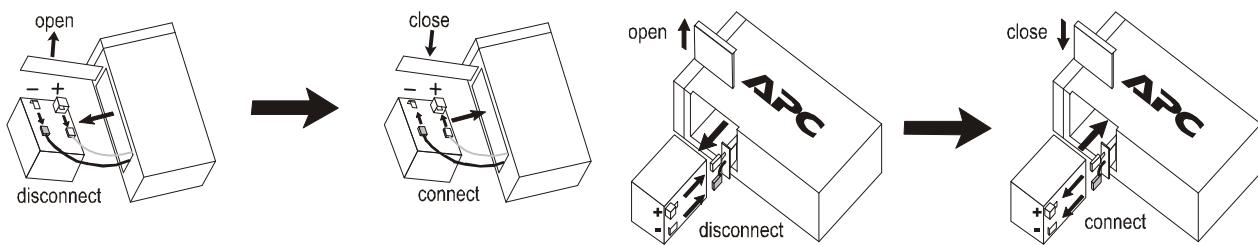


Back-UPS Pro USB 350/500/650

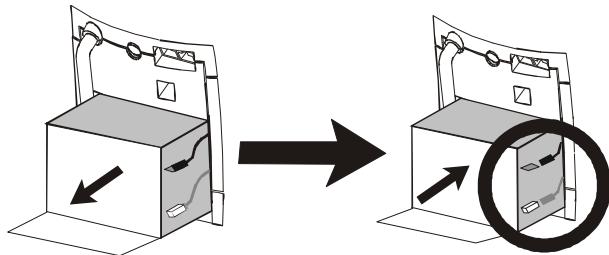

Back-UPS 1000/1400

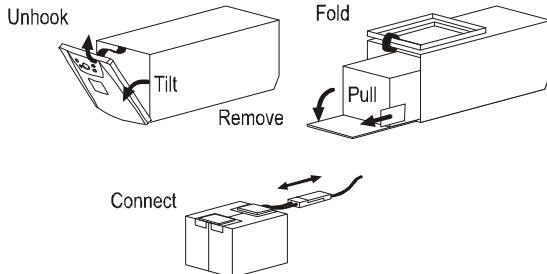


Back-UPS Office 250/500

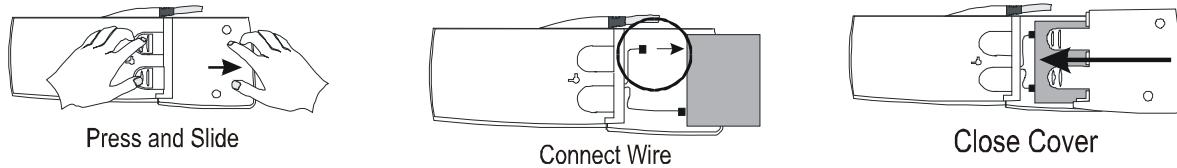


Back-UPS ES350/ES500



remove screw




slide cover off

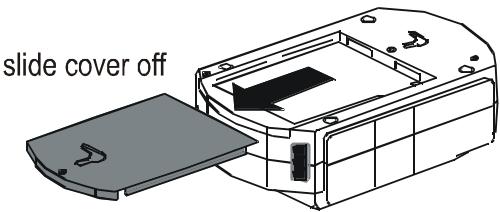

disconnect wires, replace with new battery and reconnect wires.



Close cover and
reinstall screw




Back-UPS ES 500


Back-UPS ES 350/450/550/650/725/750 (120 V)

Back-UPS ES 400/550/700 (230 V)


press release tabs and slide off cover

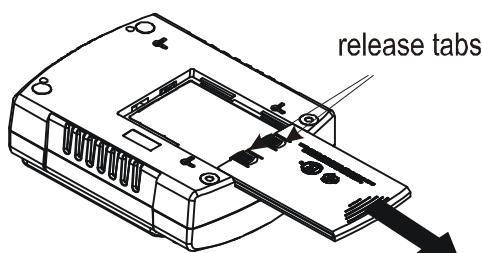

Disconnect wires, replace with new
battery and reconnect wires.





close cover

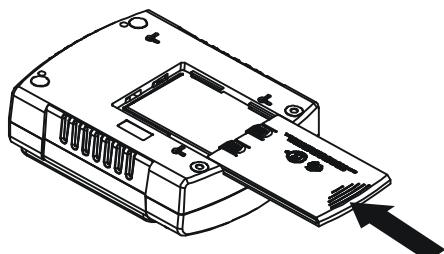


Smart-UPS


Smart-UPS Rack-Mount (5.25 inch models)

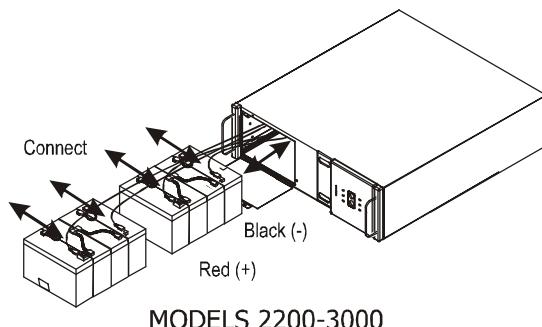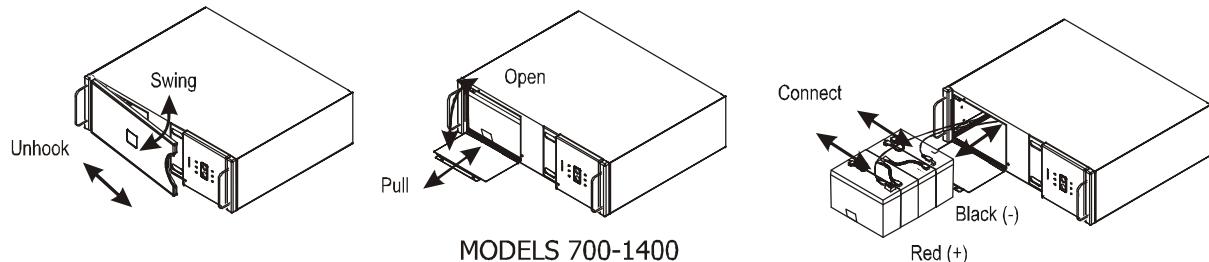


Smart-UPS Rack-Mount (8.75 inch models)

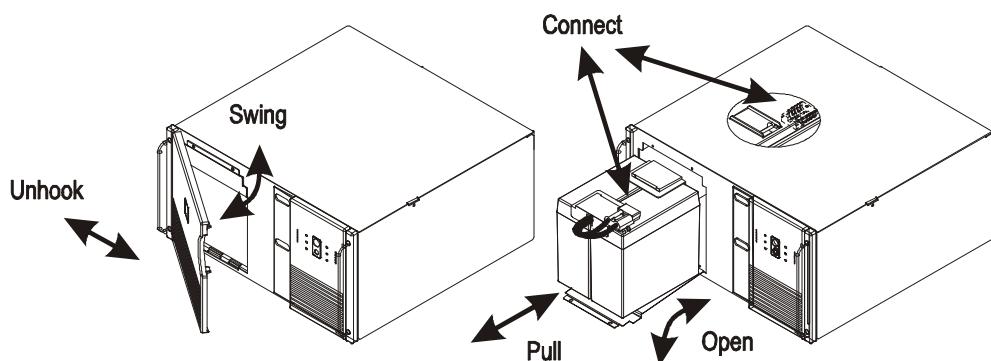


Smart-UPS Rack-Mount XL Battery Packs

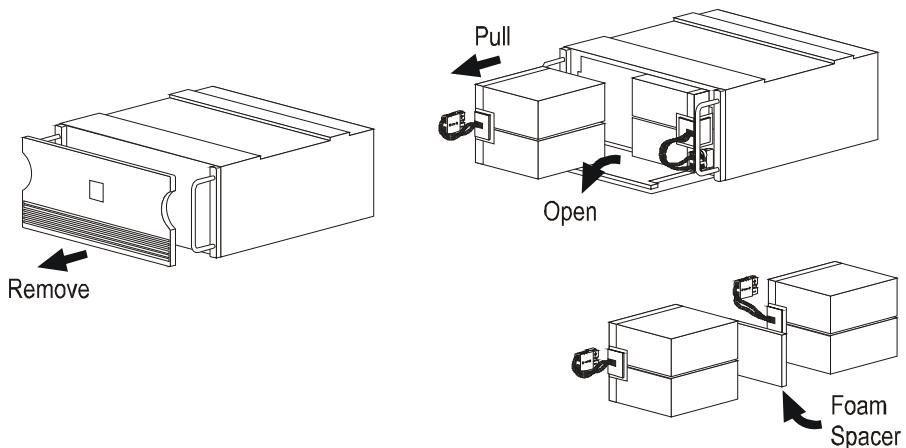


Smart-UPS 2200/3000

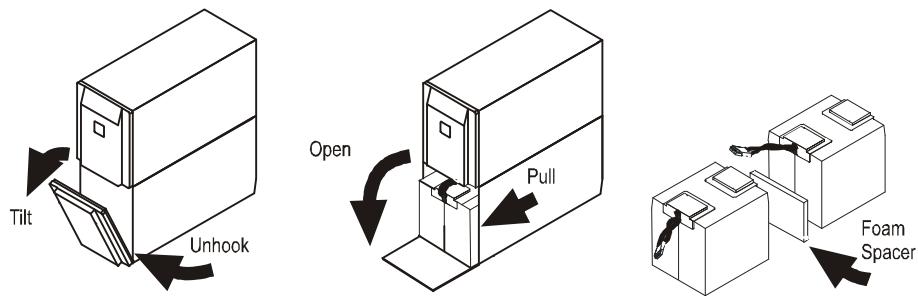


UXBP 24/48/48M

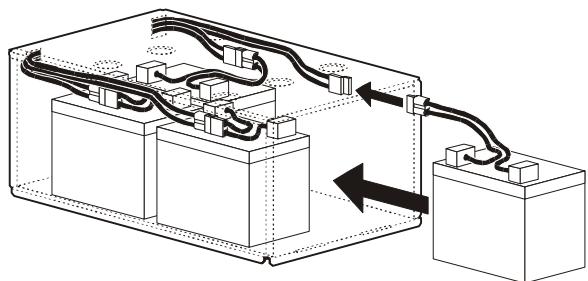

SmartCell XR

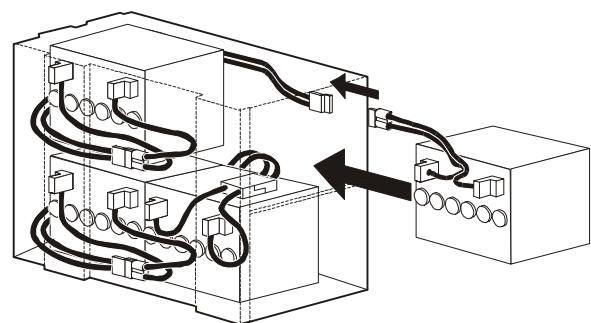


Smart-UPS 450/1500 Smart-UPS XLBP

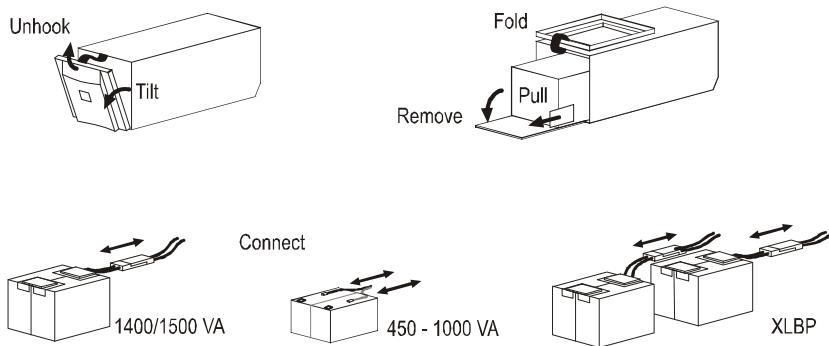


BX800/1100xx-xx


1. To remove the front panel, insert a screwdriver into the notch on the bottom of the unit. Forcefully tap the screw driver to unsnap the front panel off of the unit. Remove the screws from the back panel of the unit.

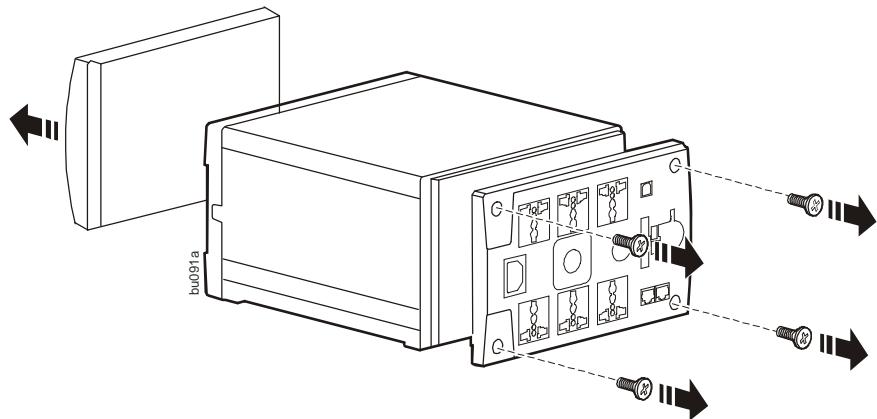

2. Remove the side panels.

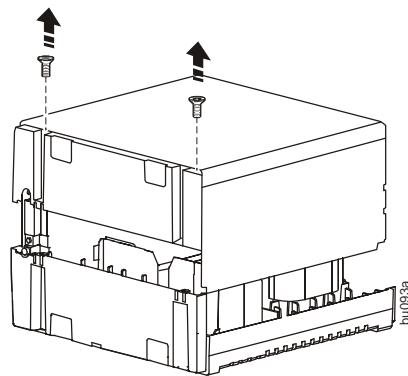


3. Detach the red and black wires from the battery. Remove the old battery and replace with new battery. Reconnect the battery wires, red to the + and black to the -. Reassemble the unit.

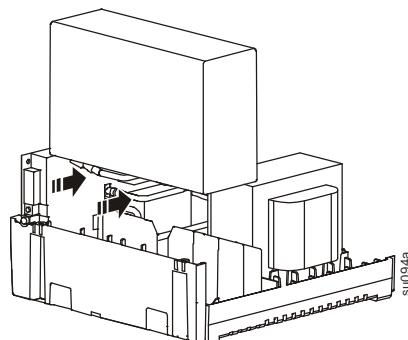


BX650xx-xx


1. Remove screws from bottom of the front panel of the UPS. Slide the front panel upwards to remove it.

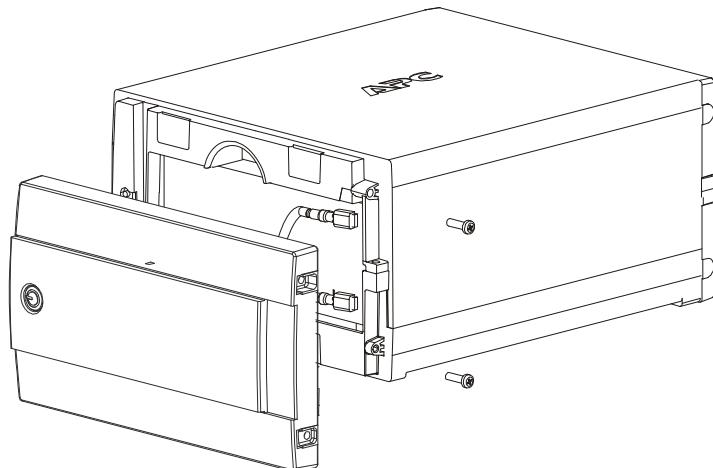

2. Detach the red and black wires from the battery.

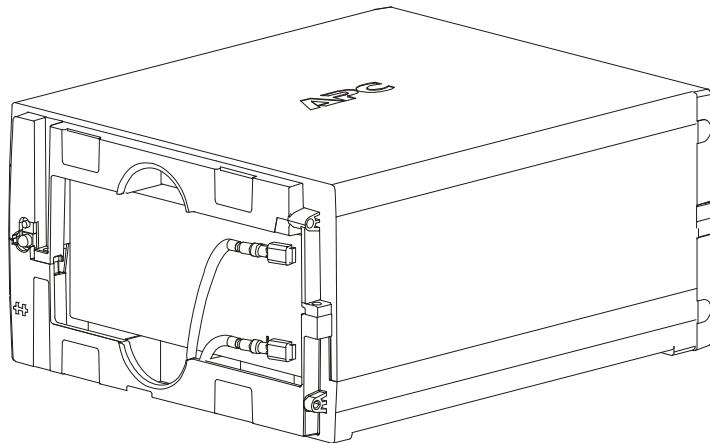

3. Replace with a new battery. Connect the wires: red to the "+" terminal and black to the "-" terminal. Reassemble the UPS.

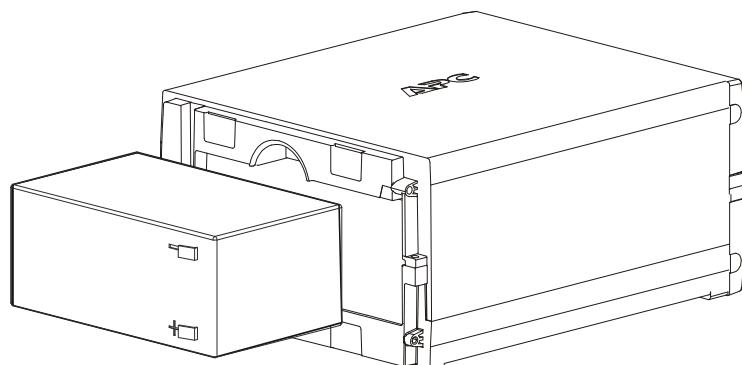

© 2012 APC by Schneider Electric. APC, the APC logo, Back-UPS, and Smart-UPS are owned by Schneider Electric Industries S.A.S., American Power Conversion Corporation, or their affiliated companies. All other trademarks are property of their respective owners.

990-0179L
9/2012