



5.0 PANEL DESCRIPTIONS



6.0 CONNECTION AND OPERATION

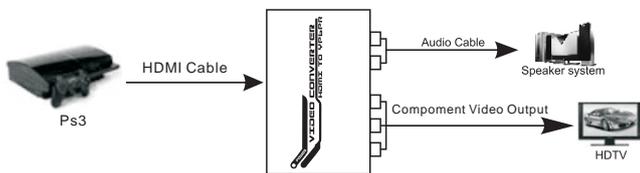

Note: This product can not support HDMI 1080P!

USER MANUAL

Table of Contents

- 1.0 Introduction..... 1
- 2.0 Features.....1
- 3.0 Specifications.....2
- 4.0 Package Contents..... 2
- 5.0 Panel Descriptions..... 3
- 6.0 Connection and Operation..... 3

HDMI to Component Video Converter

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 INTRODUCTION

This converter box converts HDMI to Component Video (Y-Pb-Pr) and stereo audio. It allows you to enjoy your high definition movies and games on the older component TV's or projectors that don't have an HDMI input. It offers solutions for digital entertainment center, HDTV retail and show site, HDTV, STB, DVD and Projector factory, noise space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

2.0 FEATURES

- * Easy to Use: Installs in seconds, no settings and it is a resolution pass-through converter.
- * It is purely for conversion between video formats but not convert the input/output video resolutions;
- * Audio output format: 2 channel LPCM;
- * Compliant with HDMI 1.3
- * Support HDCP 1.2;
- * Supports 165MHz/1.65Gbps per channel (6.75Gbps all channel) bandwidth for HDMI Input.
- * HDMI resolutions:
 - 480P@60Hz, 576P@50Hz, 720P@50/60Hz,
 - 1080i@50/60Hz;
- * Component Video resolutions:
 - 480P@60Hz, 576P@50Hz, 720P@50/60Hz,
 - 1080i@50/60Hz

3.0 SPECIFICATIONS

Signal Inputs	HDMI Signal
Input Video Signal	0.5 -1.0 volts p-p
Output Video	Component(YPbPr) Signal
DTV/HDTV	480i/576i/480p/576p/720p/1080i
Video Amplifier Bandwidth	1.65Gpbs/165MHz
Vertical Frequency Range	50/60Hz
Interlaced(50&60Hz)	480i,576i,1080i
Progressive(50&60Hz)	480p,576p,720p,1080p
Limited Warranty	1 Year Parts and Labor
Operating Temperature	0°C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90 % RH (no condensation)
Power Supply	5V DC
Power consumption (Max)	5W
Converter Unit Cert.	FCC,CE,
Power Supply Cert	CE,FCC
AC Power Adapter	US standard, UK standard and so on
User Manual	English Version

Note: Specifications are subject to change without notice.

4.0 PACKAGE CONTENTS

- 1) Main unit HDMI to Component Video Converter
- 2) 5V DC Power Supply
- 3) User Manual

深圳市博胜电子技术有限公司			
型号：PETHR （说明书）			
审	制作		采购
	工程		经理
核	制作日期：2012-11-6		
接收部门：			