

# 50A OUTLET PANEL

ELECTRICAL RATING


AC 125/250V 50A

MOUNT AT LEAST 24 INCHES ABOVE GROUND LEVEL

TYPE 3R ENCLOSURE  
RAINPROOF


ITEM NO.

**9001POP50**



NEMA # 14-50R  
RECEPTACLE

MADE IN CHINA

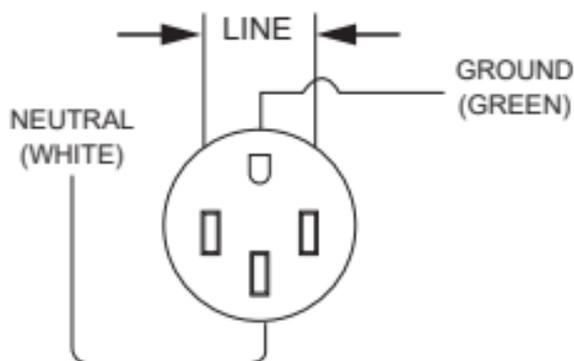

USE 60/75°C CU-AL WIRE

TIGHTENING TORQUE POUND-INCHES

SIZE OF CONDUCTOR	#14-10	#8	#6-4
LINE-NEUTRAL TERMINAL	35	40	45
GROUND TERMINAL	35	40	45

## WARNING

HAZARD OF ELECTRICAL SHOCK OR BURN  
TURN OFF POWER SUPPLYING THIS EQUIPMENT  
BEFORE WORKING INSIDE

Péril, Danger d'électrocution ou de brûlure.

Coupez l'alimentation avant de fournir ce matériel de  
travail intérieur

