




# CTA Digital - Innovative Accessories

Product Name: 2-in-1 Kitchen Mount Stand for iPad and Tablets



Product Model: PAD-KMS / PAD-KMSB

Compatible with iPad Air, iPad Mini, iPad (2nd-4th generation)

Kindle Fire, Nexus, Galaxy and most other 7-10-inch screen tablets between 6-8.5 inches wide

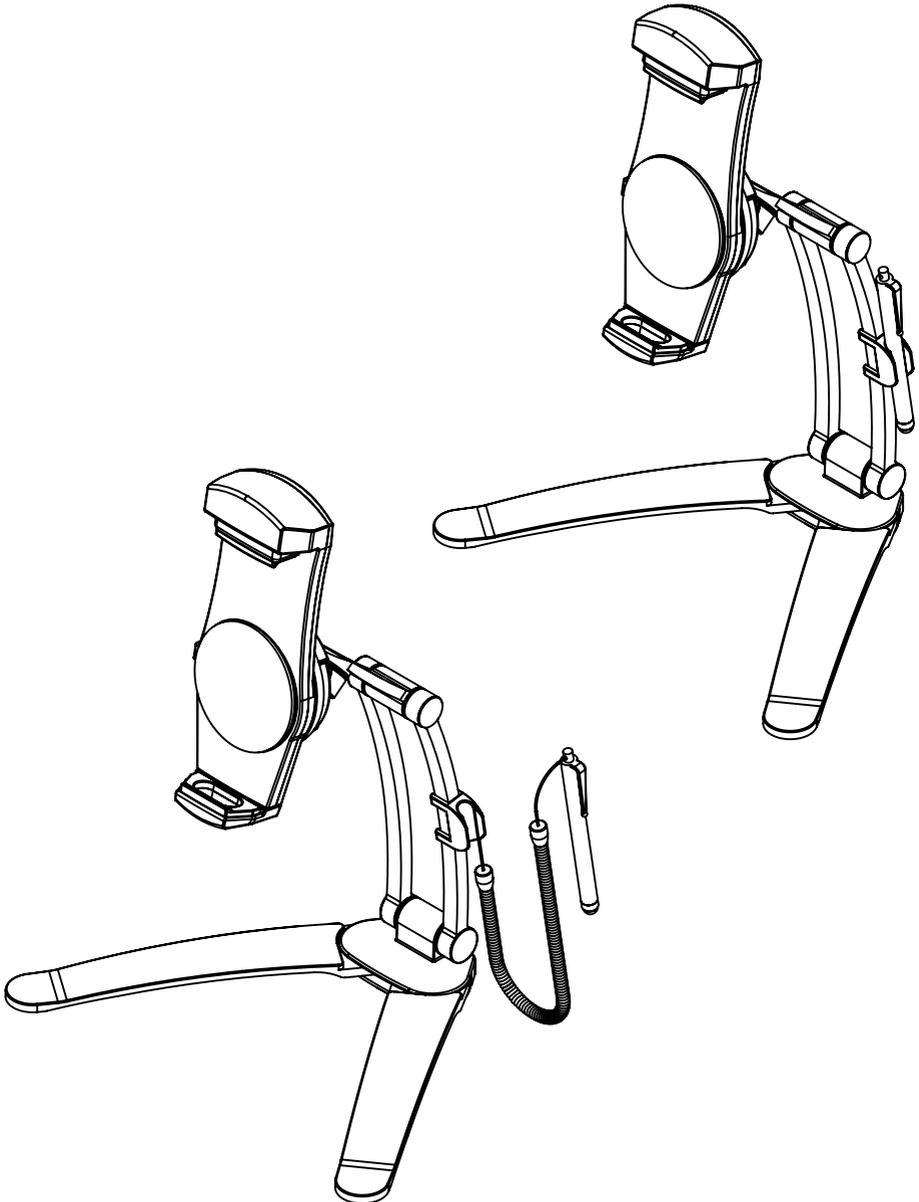


Installation Instruction

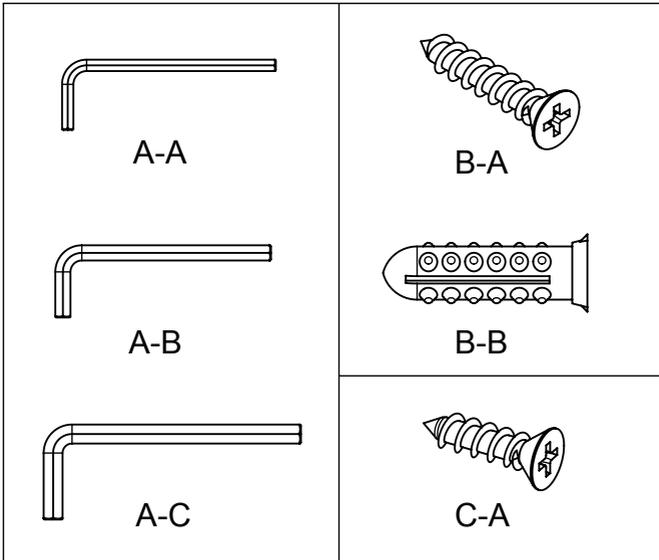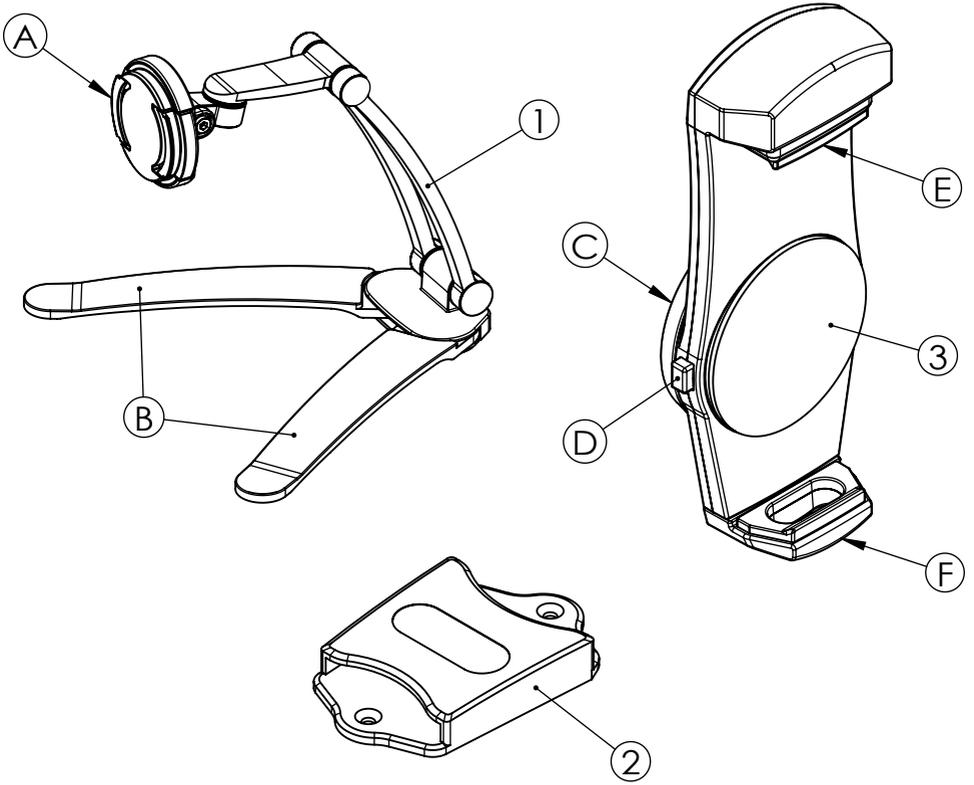


| Product Component |                    |      |
|-------------------|--------------------|------|
| Item              | Description        | Qty. |
| 1                 | Tablet Stand       | 1    |
| 2                 | Tablet Mount Base  | 2    |
| 3                 | Universal Holder   | 1    |
| Hardware Kit      |                    |      |
| A-A               | 3mm Allen Wrench   | 1    |
| A-B               | 4mm Allen Wrench   | 1    |
| A-C               | 5mm Allen Wrench   | 1    |
| B-A               | Ø5*1" Wood Screw   | 2    |
| B-B               | White Anchor       | 2    |
| C-A               | Ø5*19mm Wood Screw | 2    |

| Special Function |                               |
|------------------|-------------------------------|
| Item             | Description                   |
| A                | Attachment Button             |
| B                | Legs                          |
| C                | Attachment Socket             |
| D                | Button for Vertical Extension |
| E                | Up Bracket                    |
| F                | Down Bracket                  |

# Diagram of Operable Parts

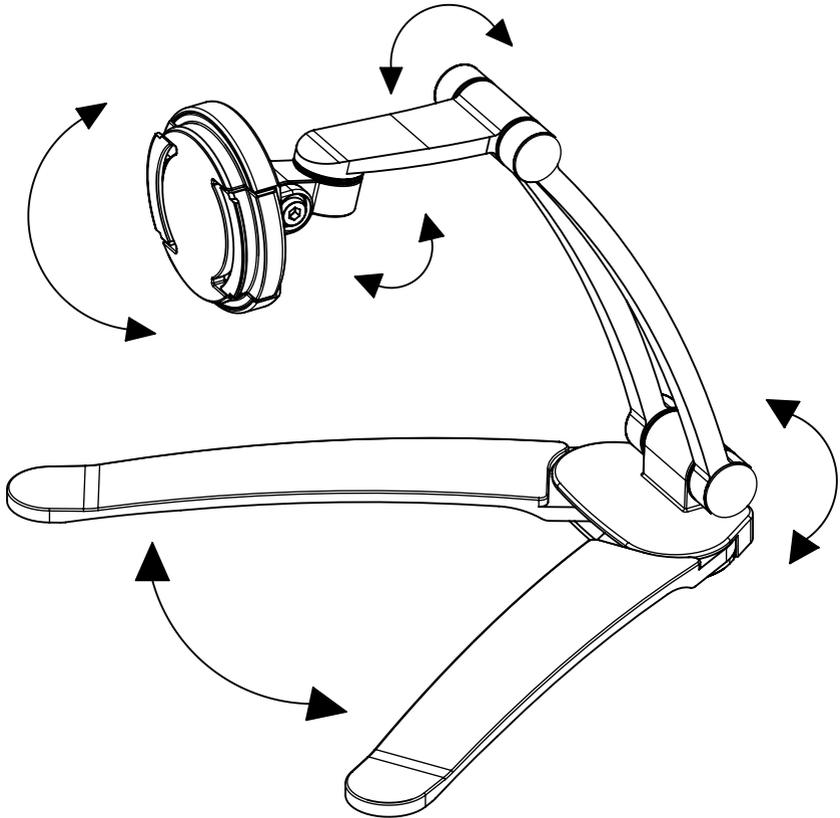

## Joint adjustment

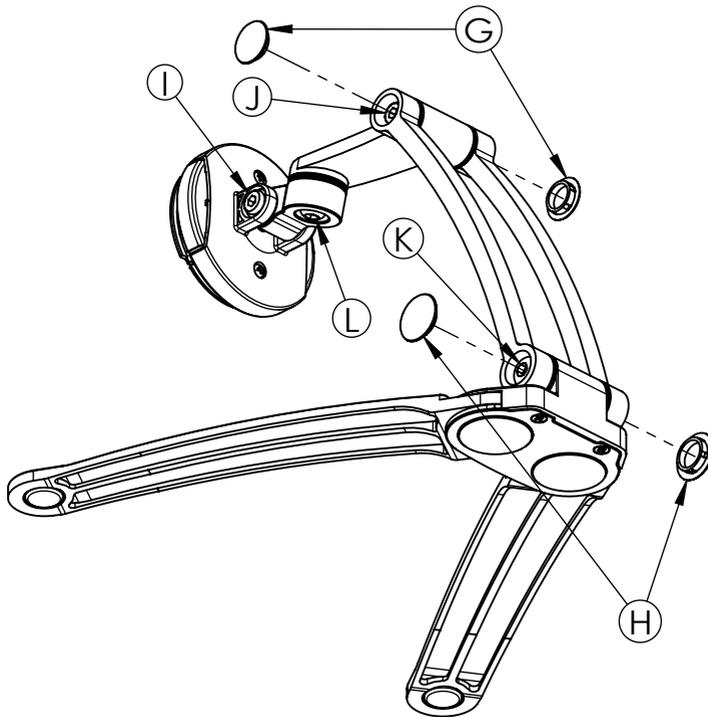


※If joints begin to lose tension with use, you can tighten using included Allen keys.

Remove caps G&H to adjust joints J&K.

Use "A-A" + "A-B" to adjust the tightness of I & J .

Use "A-B" + "A-C" to adjust K .


Use "A-B" to adjust L .

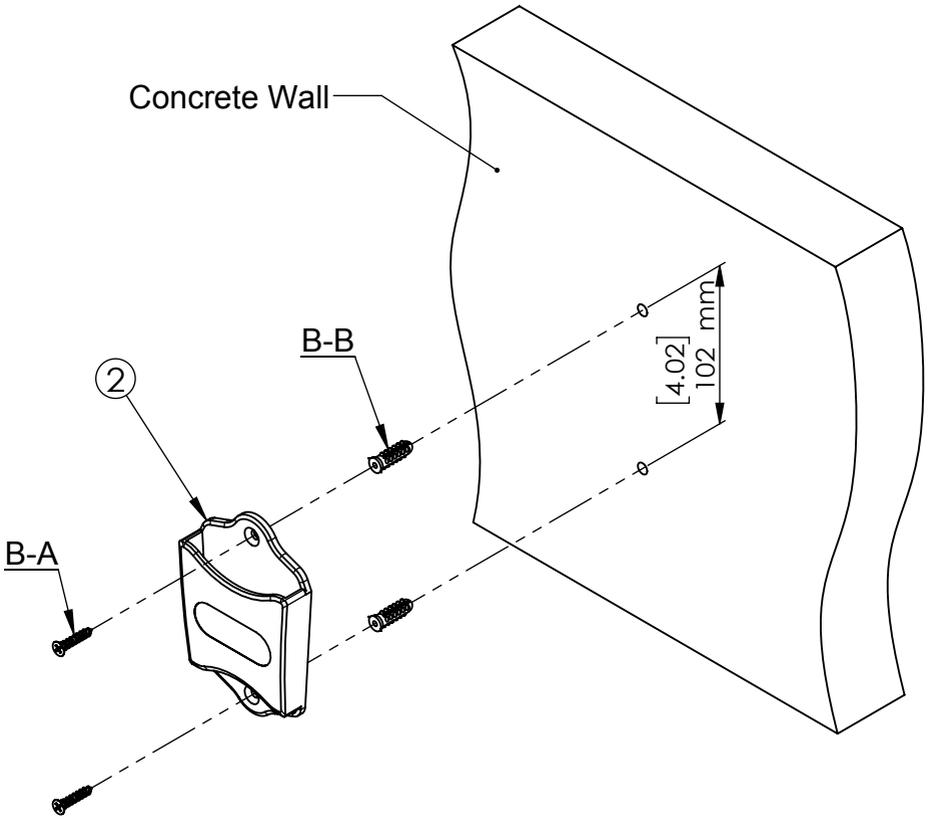

Mount Base Installation :

1. Drill hole of 7.30mm and then push B-B into wall. Use B-A to screw ② .


※ If you are installing on wood wall or cabinet, drill hole of  $\phi 4.20\text{mm}$ . Use C-A instead of B-A. There is no need to use B-B.

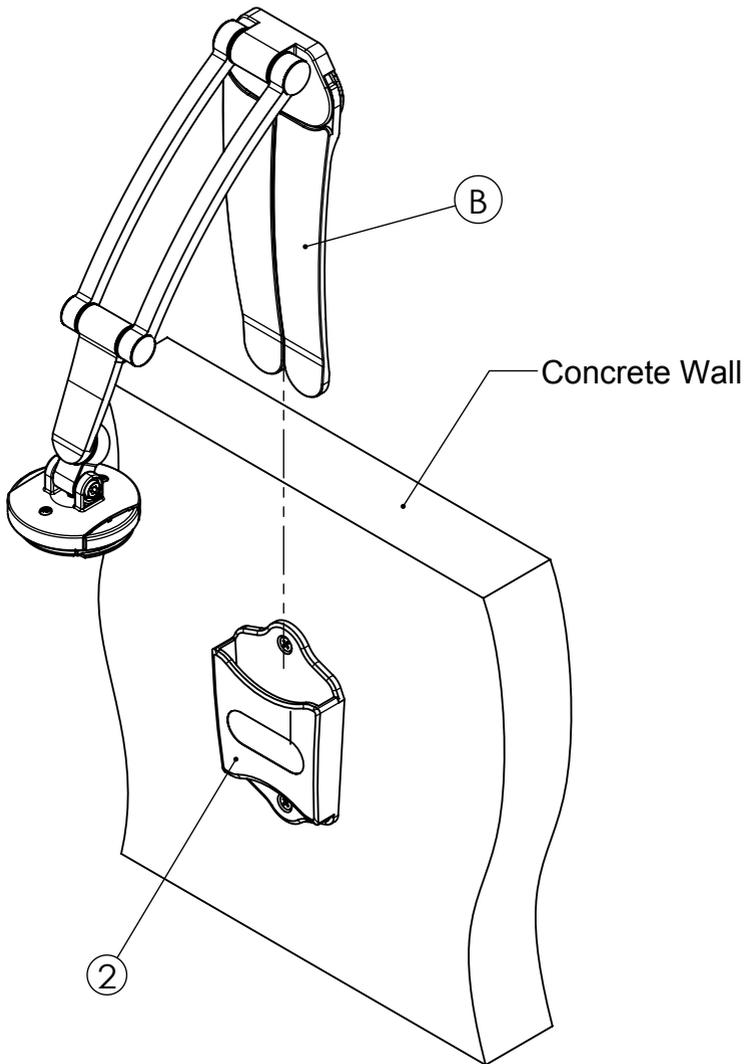


2. Fold (B) and insert it into (2) .

Note: be sure wall mount is tightly secured to wall before inserting tablet.

Mount Base on wall

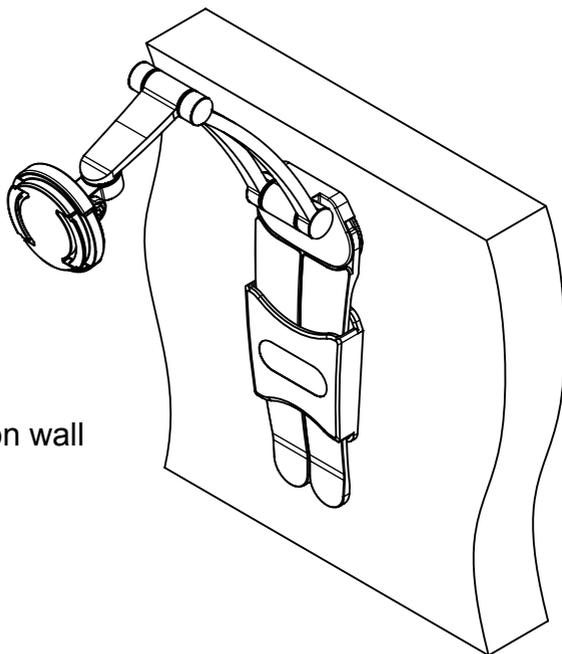


Mount Base under cabinet

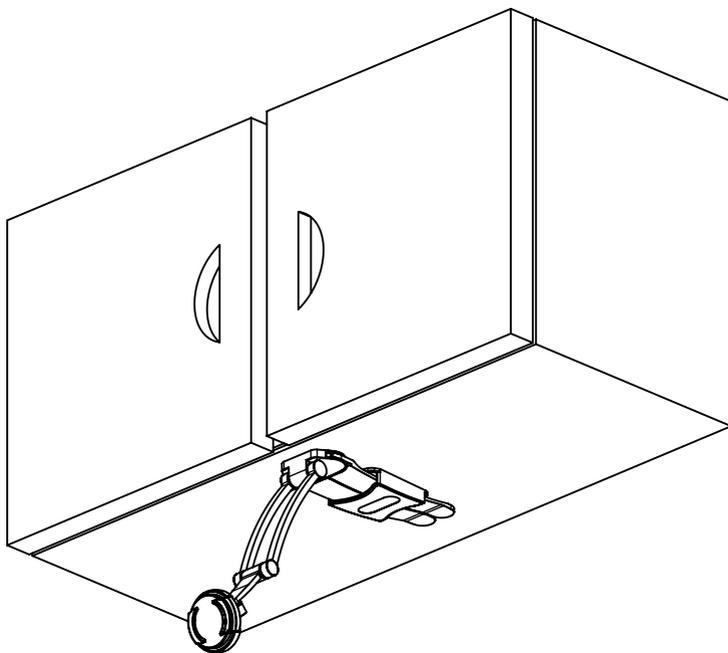

## Note for Table-top Stand


Forward position :

※ Do not let tablet exceed the front end of (B) , plane (A) ,  
to prevent (1) from toppling and damaging tablet.




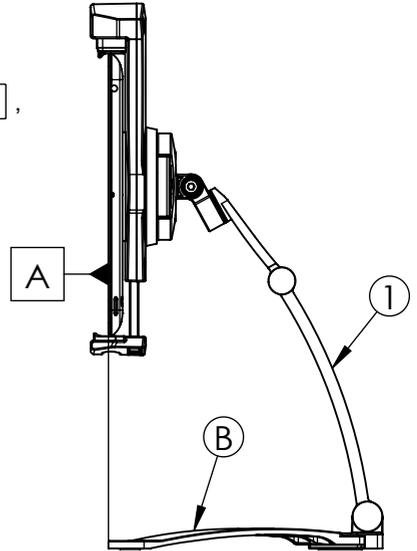



Backward position :

※ When in backward position, do not let (1) exceed plane (B)  
to prevent (1) from falling backwards and damaging tablet.

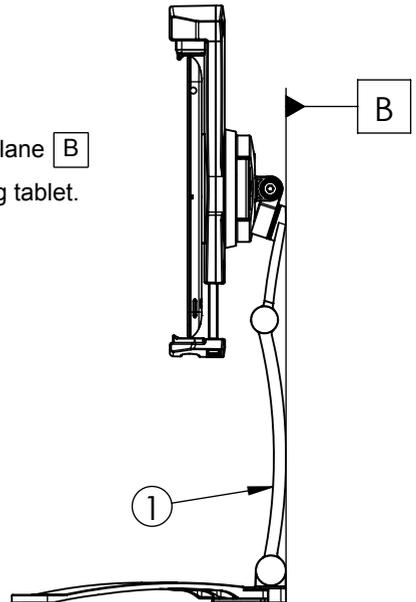

# Dimension of Folded Stand

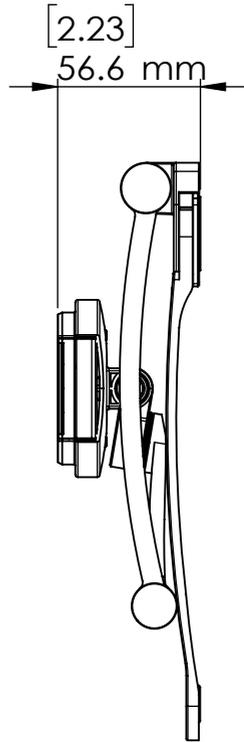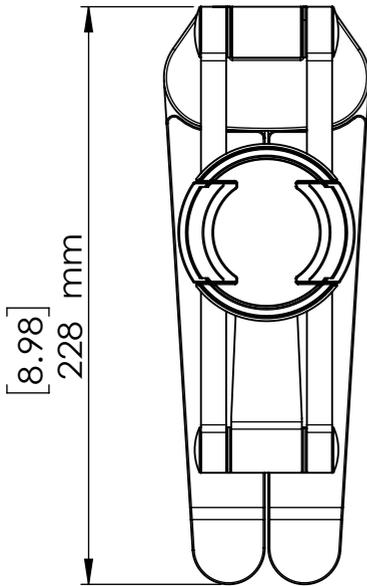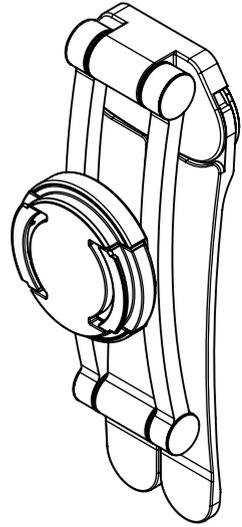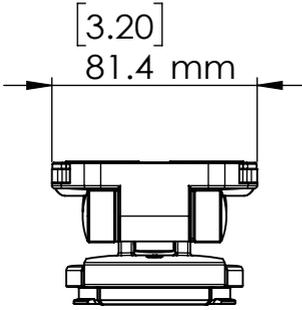


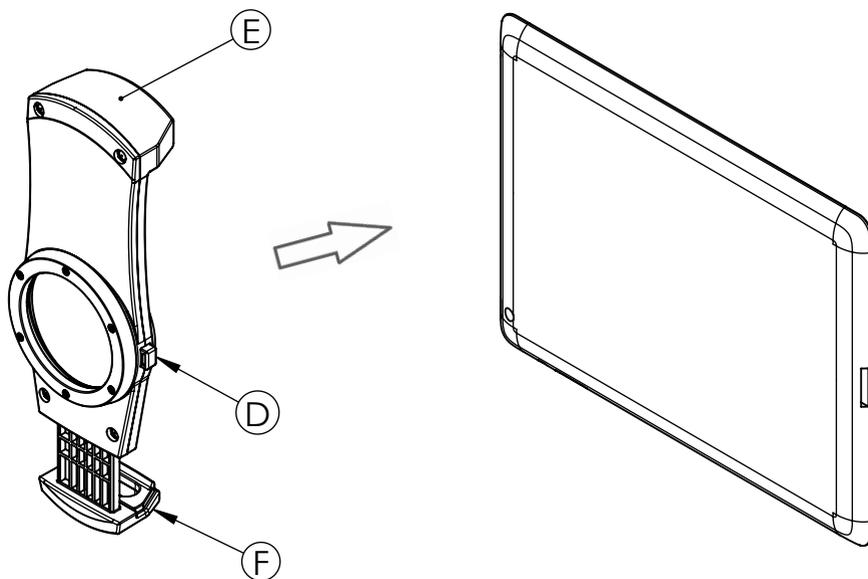

Attachment Description 1 : Press button D and extended arm F wide enough to fit tablet diagonally. Then release button D.

Attachment Description 2 : Place tablet corner against E and press D. Then slide F back tightly against tablet corner.


Attachment Description 3 : After tablet is secured, release D. Check to be sure tablet is held tight.

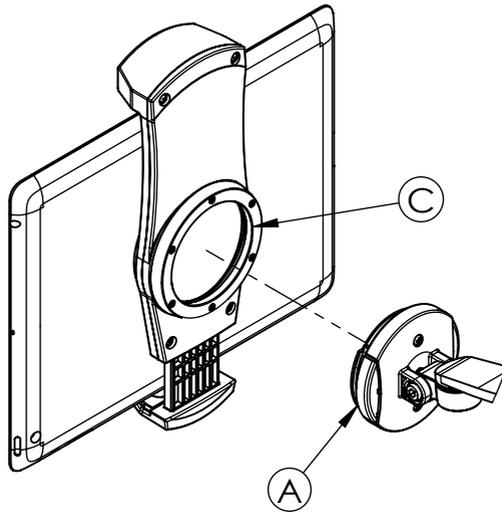



Attachment Description 4 : Press (A) to take off or attach (C) .

\* Note: After attaching, be sure the two items are fastened properly before using inserting tablet.

Attachment Finished

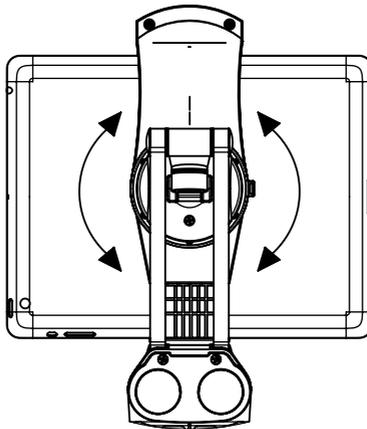

Attachment Description 5 : After attaching, turn tablet clockwise or anti-clockwise to get the best view.

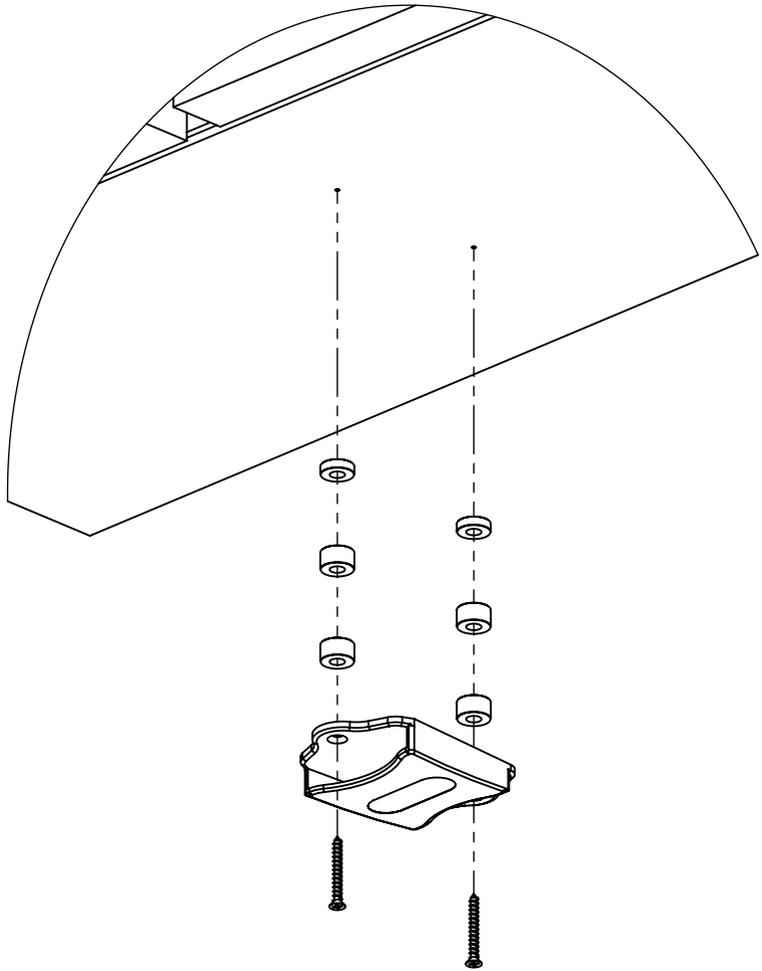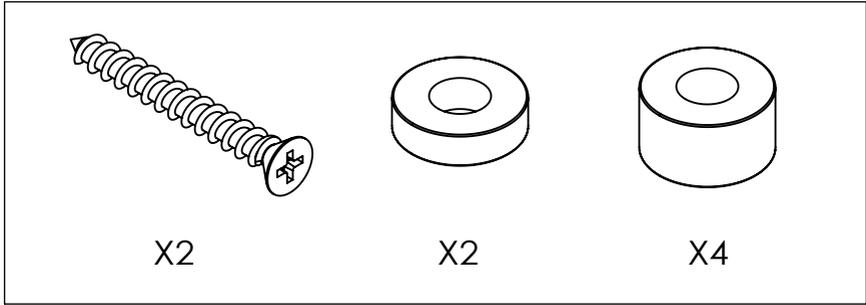

Add spacers for more room between cabinet or wall and mount if necessary using larger screws provided.