

# LED SCREEN LIGHT

## USER MANUAL




**LED DIMMABLE**  
**SCREEN LAMP**  
With eye Protection

MODEL: PHX003D



1

### PARTS & DESCRIPTION

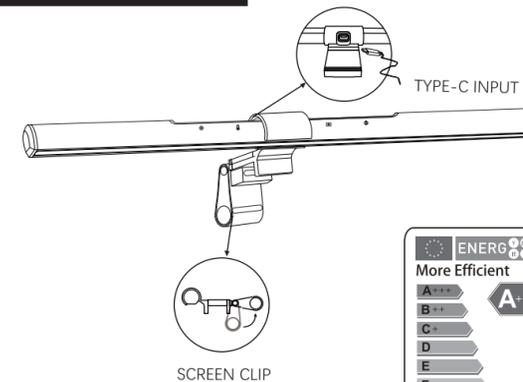

### SPECIFICATIONS

MODEL	POWER	LUMEN	CRI	INPUT	SIZE(L)
PHX003D	6W	255LM	RA>95	5V 1A (TYPE-C)	40CM


### WHERE TO USE



2

Computer
PC
IMAC
DESKTOP PCS
MACBOOK
Etc.

### HOW TO USE THE BUTTON

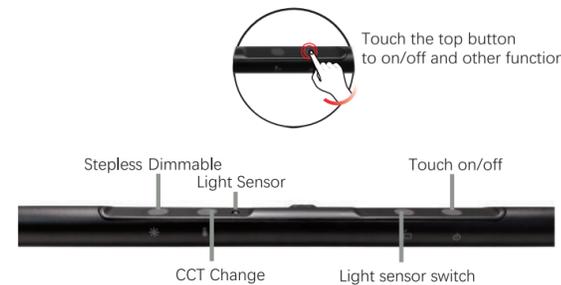

On/off: turn once time to on /off the lamp

Light sensor switch: touch once time to adjust the light intensity automatically according to the environment. When the small indicator light turn blue, means this function is working.



1. Touch once time to on/off the function
2. When the function is working , lamp will adjust auto: Environment turn bright, the lamp turn dark gradually Environment turn dark, the lamp turn bright gradually
3. If you want to stop this function have 2 method:  
Touch the function button  
Touch the dimmable button

CCT change : control the color temperature ,touch the button for 3 seconds can change the color 3000k-4000k-6000k.


Dimmable : touch the button for 3 seconds can make the lamp stepless dimmable.

### TIPS

Memory function: 1. lamp remembers the last settings when turn on light.  
2. if cut off power directly without touch on/off switch, when connected power again, lamp will automatically turn on.

3

### HOW TO MOUNT THE LAMP BAR

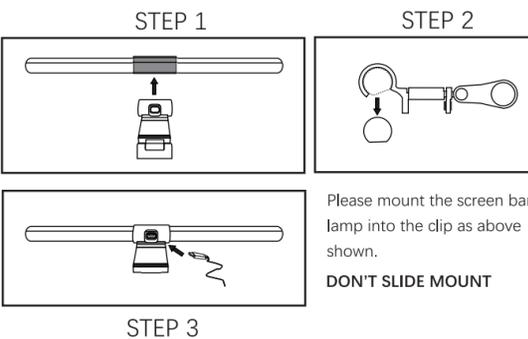

Please mount the screen bar lamp into the clip as above shown.  
**DON'T SLIDE MOUNT**

STEP 3

### HOW TO MOUNT THE SCREEN CLIP COVER




Notes: Please add the adjustment cover for the screen clip in below situation:

1. Laptop screen: ultrathin screen thickness between 1mm-3mm.
2. Monitor: screen thickness between 7mm-28mm.

**Tips: The cover should be mounted with the right direction!!**

4


### HOW TO USE THE SCREEN CLIP

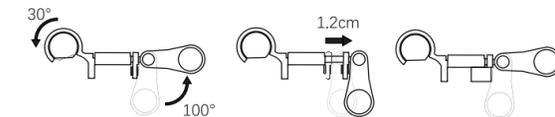

1. The lamp bar rotate angle is 30°
2. The clip rotate angle is 100°
3. The clip have the spring inside and it can pull out max 1.2cm
4. When pull out the clip still can change the angle

### HOW TO USE THE SCREEN CLIP ON MONITOR


USING 1

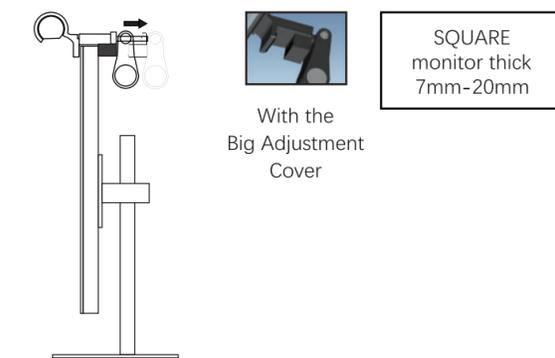

With the Big Adjustment Cover


5

USING 2

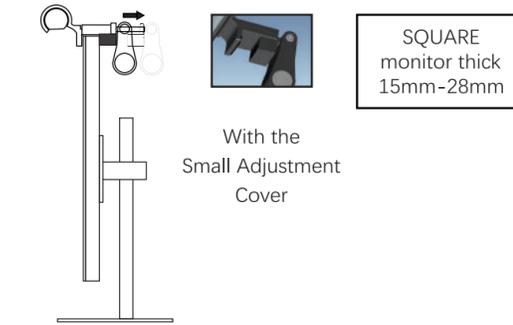

With the Small Adjustment Cover

USING 3

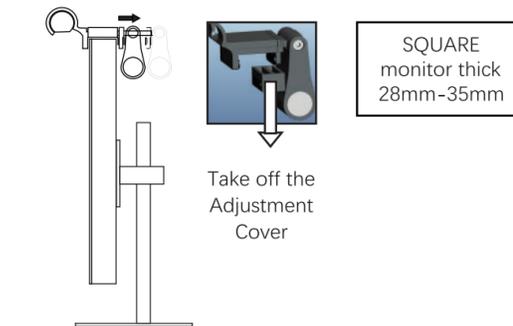

Take off the Adjustment Cover

### TIPS

Please fix the screen clip like above 3 example. The applicable range of the monitor screen thickness is between 7mm to 20mm, using big cover. Screen is between 15mm to 28mm, using small cover. Screen is between 28mm to 35mm, please take off the cover.

6


### HOW TO USE THE LAMP

USING PHOTO A




SQUARE monitor thickness  
7mm-28mm  
with adjust cover

USING PHOTO B

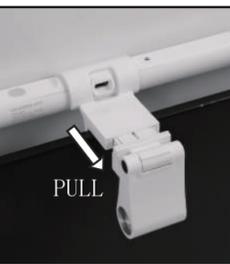

SQUARE monitor thickness  
28mm-35mm  
no adjust cover

### HOW TO LIGHT

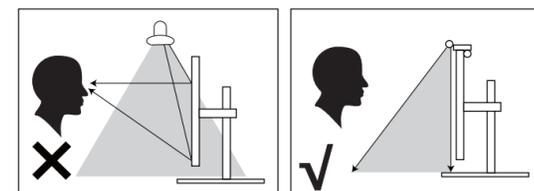


1. The normal light source light to screen , then reflect to people eyes, harm to eyes.

2. The screen bar is special lighting to KEYBOARD, not light to screen. No glare, protect eyes.

7

### HOW TO FIX THE CLIP TIGHT


STEP 1: take off the cover



STEP 2: tight the locked screw




STEP 3: put the cover back



### POWER INPUT APPLICATION



### PACKAGE CONTENT

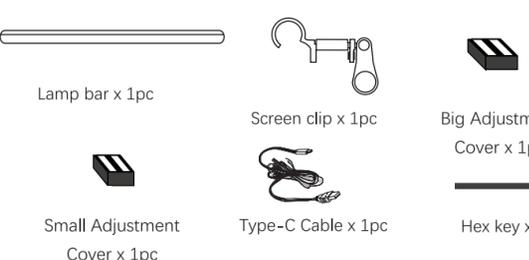

8