

3 Compartment Sink Assembly Instructions

1

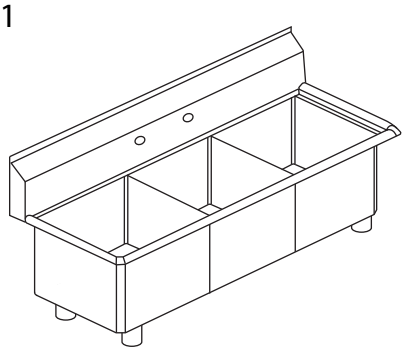

2



3



4




5




- Sink (1)
- H-Shaped Legs (2)
- Drain Basket (3)
- Allen Screws (8)
- Allen Wrench (1)

Unpack and check to make sure all contents are complete.
Please follow the steps and instructions below.

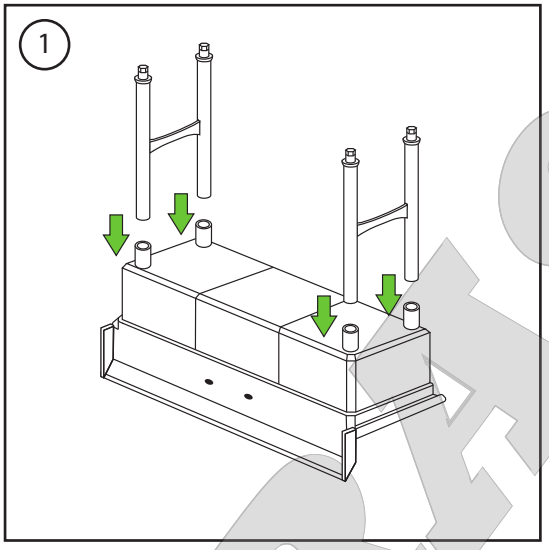


1. Turn the sink back

Place the carton top underneath for padding to avoid scratching.

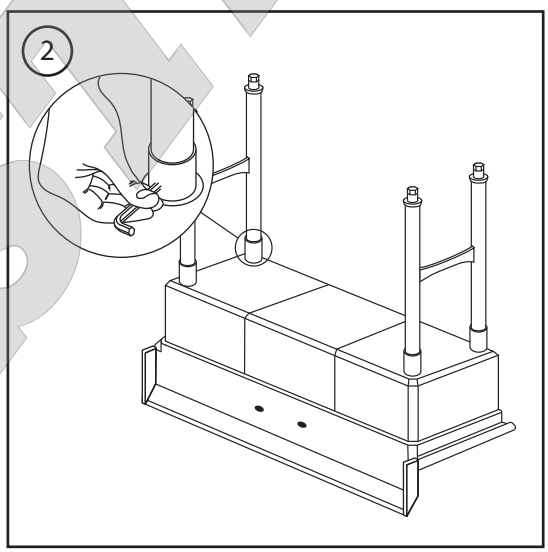


2. Assembly four legs

Insert H-shaped legs into the leg sockets, then fasten the allen screws. The screws must be tightened.

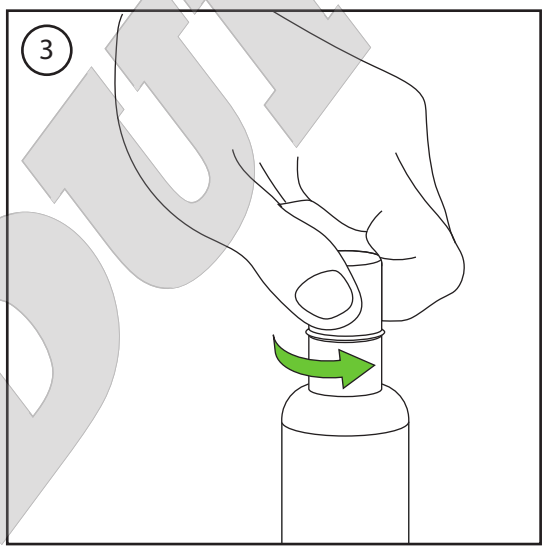


3. All four legs can be adjusted for surfaces that aren't completely level. Rotate the plastic foot pad to compensate for differences in floor surface.

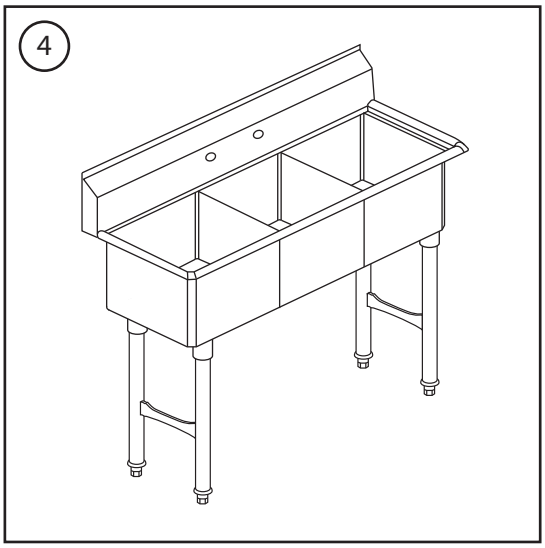


4. Turn the sink back, and continue to install drain basket.

DURASTEEL

5

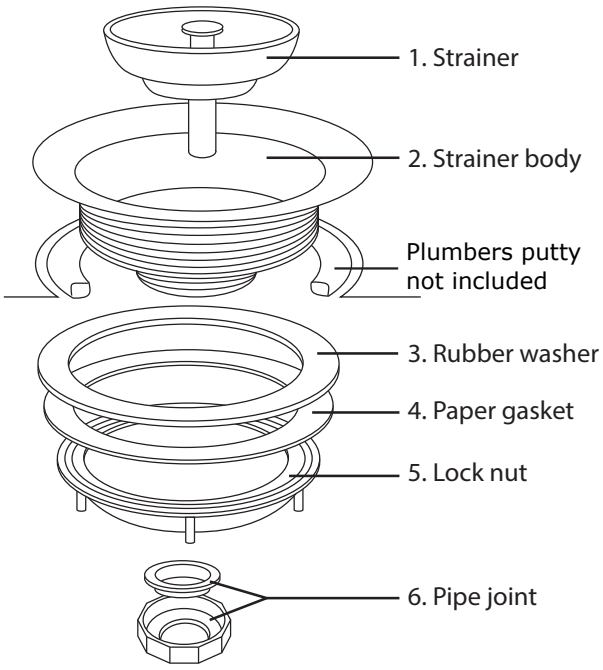

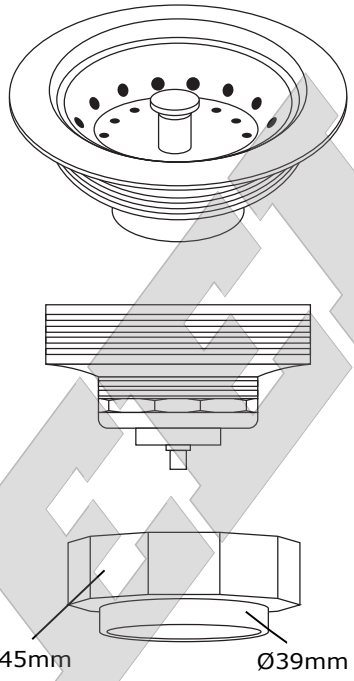


*Connection: 1-1/2" IPS

5. Drain Basket Installation

The drain basket (#1 strainer and #2 strainer body) goes on the inside of the sink and the #3 rubber washer,#4 paper gasket, #5 lock nut, and #6 pipe joint are under the sink. The #3 rubber washer seals the sink from below. As the #5 lock nut is tightened, it squeezes the lower part of the basket assembly towards the bottom of the sink. Attach drain-pipe (not included) to #2 strainer body using #6 pipe joint. After drain basket is installed, the sink installation is complete. *If the drain leaks, please use plumbers putty or silicone to seal it. (Not included in the purchase)

6

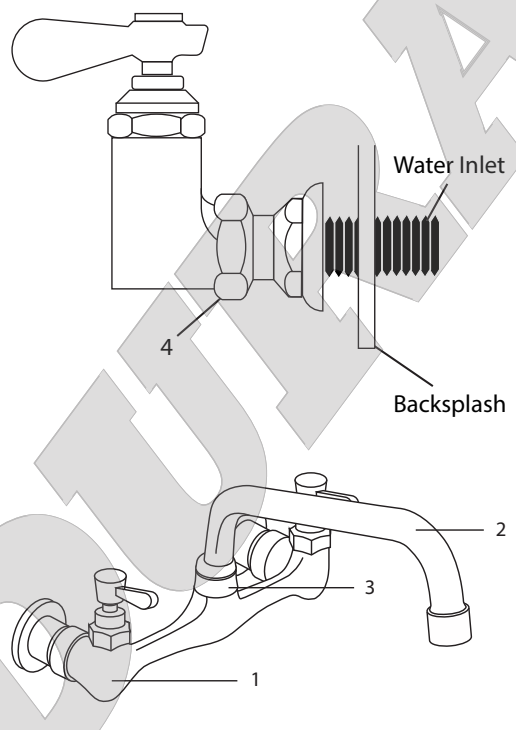

6. Faucet Installation (Sold Separately)

Please make sure the size of the water inlet is 1/2" NPT male. If you have any different type or size, we recommend you to find a licensed plumber to assist you with converting the inlet for installation. Optional installation kit, please refer to next page.

1. Turn off water supply, and flush lines.
2. Apply Teflon tape or pipe joint compound to threads of water inlet. *Teflon tape must be applied by turning it clockwise around the thread.
3. On back side of backsplash, insert male water inlet through backsplash.
4. On front side of backsplash, thread #4 coupling nuts onto the inlets. (Do not tighten at this time.)
5. Adjust coupling nuts to mate with male threads of #1 faucet body. *Please check if the rubber washer which faucet comes with is between coupling nut and faucet body.
6. Using crescent wrench, tighten #4 coupling nuts to male water inlets.
7. Again, using crescent wrench, tighten #4 coupling nuts to #1 faucet body.
8. Insert #2 spout into #1 faucet body. Using crescent wrench, tighten #3 spout nut onto threads of #1 faucet body.
9. Attach water supply lines.
10. Turn on water supply and check for leaks.
11. Remove aerator and flush lines for 1 to 2 minutes.

If you experience any assembly issue such as lock nut screwing issue or leaking within 30 days of your purchase, please take a picture of the package print that shows the "Model Number" & "Batch ID" and a short video of the issue, and send to (682) 626-6228 with your order ID. You will require to follow our troubleshoot guideline, and answer a few questions from the technician. Most of the issues can be resolved during troubleshooting. If we believe the issue comes from manufacture, we will send you replacement parts. Thank you!

DURASTEEL

FAUCET INSTALLATION KIT (SOLD SEPARATELY)

If you have 1/2" NPT female water inlet, you might need a faucet installation kit to complete installation. The faucet installation kit doesn't include in the package.

· 2 x 90-Degree Elbows
· 2 x Nipples
· 2 x Rubber Washers
· 2 x Metal Washers
· 2 x Lock Nuts


**Please use the link or use your phone camera to scan the QR code to the right to purchase this item on Amazon.

Faucet Installation Kit
http://www.amazon.com/dp/B08JGMZ7T3

DURASTEEL

ASSEMBLY INSTRUCTIONS

a. 1/2" Nipple
b. Rubber or Plastic Washer
c. Metal Washer
d. Lock Nut
e. 1/2" 90° Brass Elbow

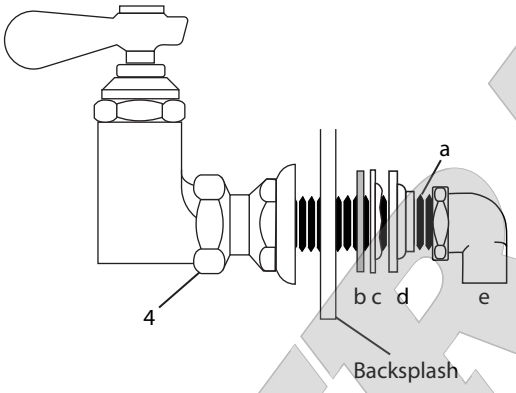

***Teflon tape must be applied by turning it clockwise around the thread.**
***Part #1 - 3, please refer to previous page.**

1. Turn off water supply.
2. Flush lines.
3. Apply Teflon tape or pipe joint compound to one side of thread of pipe nipples.
4. Thread the side of pipe nipples which are appilied Teflon tape or pipe joint compound onto #4 coupling nuts. (Do not tighten at this time.)
5. On front side of backsplash, insert pipe nipples through backsplash.
6. Place rubber washer, metal washer, lock nut onto pipe nipples on back side of backsplash.
7. Follow washer with nut and sung firmly against backsplash.
8. Adjust #4 coupling nuts to mate with male threads of #1 faucet body. *Please check if the rubber washer which faucet comes with is between coupling nut and faucet body.
9. Using crescent wrench, tighten #4 coupling nuts to pipe nipples.
10. Insert #2 spout into #1 faucet body. Using crescent wrench, tighten #3 spout nut onto threads of #1 faucet body.
11. On back side of backsplash, apply Teflon tape or pipe joint compound onto the pipe nipples, and then thread 90° elbow onto the pipe nipple and tighten it.
12. Attach supply lines onto 90° elbow.
13. Turn on water supply and check for leaks.
14. Remove aerator and flush lines for 1 to 2 minutes.

Note to users:

This product meets Section 1417 of the Safe Drinking Water Act (SDWA), California AB 1953 & Vermont S. 152 Standards. All pieces of legislation require that water pipes, fixtures and fittings contain no more than 0.25% weighted average of lead – which can be marketed as "lead free".

Warning

In order to uphold the longevity of the DuraSteel stainless steel sink. It should be rinsed out or wiped down after every use and periodically cleaned with a non-abrasive mild detergent. Please refer to our Stainless Steel Care and Cleaning Instructions.

Contact Us

Our response will be in English

Purchase from

amazon.com
amzn.to/2Twy8Dk

amazon.ca
amzn.to/2PuT0ff

amazon.com.mx
amzn.to/2w7Cueb

Related Products



Utility Sink
ASIN
B016NGC1M



1 Compartment Utility Sink
ASIN
B088H8M468



Bar Sink
ASIN
B071D5YK4H



Hand Sink
ASIN
B015YS0OW6



Mop Sink
ASIN
B01MS20792

Accessories



Installation Kit
ASIN
B08JGMZ7T3



Faucet
ASIN
B091H2Y4Z7



Pre-Rinse
ASIN
B0942FVBSW



Splash Guard
ASIN
B01MY92JQH

View Products

Pick following link by your country and exchang ASIN to product ASIN code.

For example: amazon.com/dp/B08JGMZ7T3

Make sure to select the size & spec you like.

US
amazon.com/dp/ASIN
Canada
amazon.ca/dp/ASIN
Mexico
amazon.com.mx/dp/ASIN

@durasteel
@DuraSteelUSA



Boosted Legs
ASIN
B082TQL15Y



Caster
ASIN
B07RJRXFYJ

© 2022 DuraSteel All Rights Reserved