

Installation Guide

5-Port Gigabit Desktop Switch with 4-Port PoE

Model: SG305P

LED Explanation

Power

● On: Power on ● On: Enabled
○ Off: Power off ○ Off: Unenabled

Note: If VLAN is enabled, ports 1-4 can not communicate with each other, but can only communicate with port 5.

Link/Act




▲ On: Link successful
★ Blink: Data working

△ Off: No link

Note: If a PoE device is connected, you can check the connected device's indicator to see if the switch has supplied power to it.

Connection

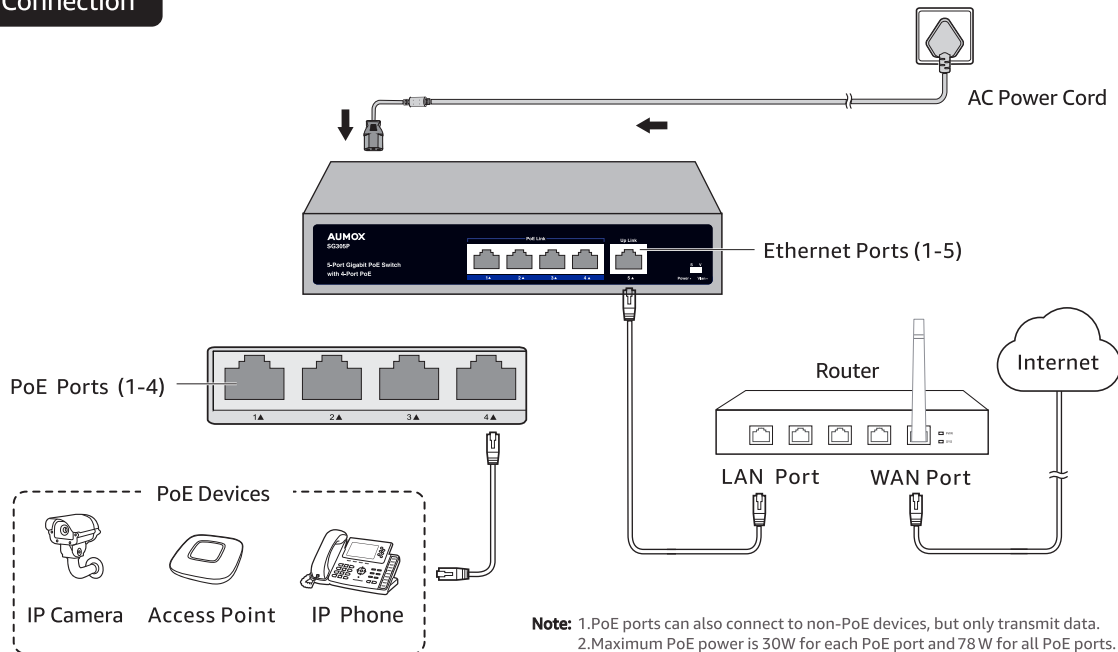


Need help?

This AUMOX product contains 1-year limited warranty and lifetime technical support.

For more information and warranty requests, please contact our 7x24 hours support team.

Visit <https://aumox.com/support/> or simply scan the QR code below:



Specifications

Model	SG305P
PoE Port	4x100/1000Mbps
Uplink Port	1x100/1000Mbps
Output Power	15.4W/30W
Power Pin	1/2+ 3/6-
Whole Power	≤78 W(52V 1.5A)
PoE Type	End-span
Power Distance	≤100m
Network Standard	IEEE802.3AF/AT
Data Distance	≤100m
Switch Capability	12 Gbps
Forwarding Mode	Store and forward
MAC Address	MAC address table 2K
Forwarding Rate	100BASE-tx:148800PPS/port 1000BASE-tx:1488000PPS/port
Working Environment	-10° -- 55° C
Weight	1 kg
Size	200mm*118mm*44mm