



Equipped with AEM® Dryflow™ Filter
No Oil Required!

INSTALLATION INSTRUCTIONS

PART NUMBER: 21-8223

2011-2014	DODGE	Challenger	V8-5.7L	
2011-2014	DODGE	Charger	V8-5.7L	
2008-2010	DODGE	Challenger	V8-6.1L	C.A.R.B. E.O. # D-670-6
2009-2010	DODGE	Challenger	V8-5.7L	C.A.R.B. E.O. # D-670-6
2009-2010	DODGE	Charger	V8-6.1L	C.A.R.B. E.O. # D-670-6
2009-2010	DODGE	Charger	V8-5.7L	C.A.R.B. E.O. # D-670-6


**SOME INTAKE SYSTEMS ARE NOT LEGAL FOR
SALE OR USE ON ANY POLLUTION CONTROLLED
MOTOR VEHICLE IN CALIFORNIA OR STATES
ADOPTING CALIFORNIA EMISSION PROCEDURES.**

See aemintakes.com for CARB status on each part for a specific vehicle

PARTS LIST

	Description	Qty.	Part Number
A	Upper Pipe, Intake	1	2-1406
B	Lower Pipe, Intake	1	2-1407
C	Hose, Hump 3.50/3.50x9.00" 90 Deg.	1	5-1037
D	Mount, Rubber 1" X 8mm	1	1228560
E	Washer, 8mm Soft Mount	2	559960
F	Nut, M8 Hex Serrated	2	444.460.08
G	Grommet; 1"OD, 1/2"ID, 1/2"Thk.	1	08064
H	Air Filter Assy. 3.5" X 7" Dryflow Element	1	21-2147DK
I	Hose, Silicone 3.50"ID x2"L	1	5-351
J	1/2" Bnd. Hose Clamp, 3.15"-4.00"	5	9456
K	Hose; 1/2"ID X 14"L	1	5-5014 </td
*L	Extension Harness; IAT	1	21698
M	Zip Tie, 6" Long	2	1-113
N	Hose Adapter, 3/4" X 1/2"	1	8-146
*O	Extension Harness; IAT	1	21781

* Because the stock IAT connectors vary among Dodge vehicles of the same model year, your AEM® intake system includes two IAT extension harness kits. You will only use 1 of the 2 extension harness kits provided. Use the appropriate harness to fit your vehicle's IAT connector. (Item L or O.)

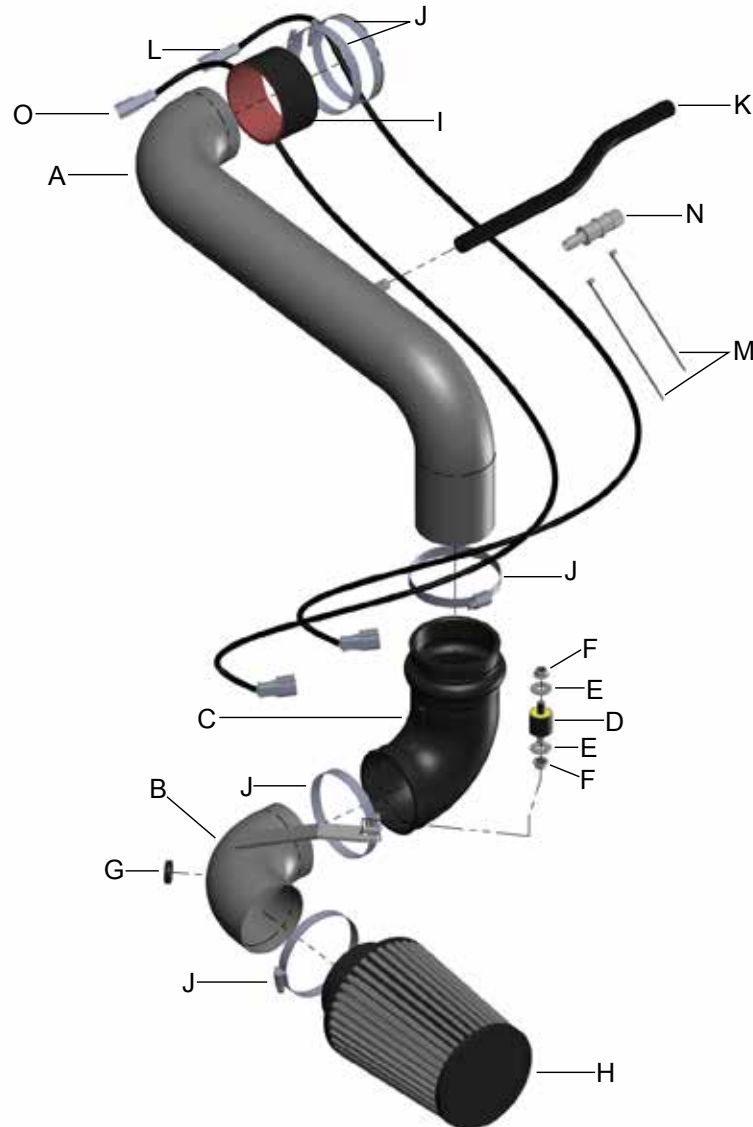

Read and understand these instructions **BEFORE** attempting to install this product. Failure to follow installation instructions and not using the provided hardware may damage the intake tube, throttle body and engine.

The AEM® intake system is a performance product that can be used safely during mild weather conditions. During harsh and inclement weather conditions, you must return your vehicle to stock OEM air box and intake tract configuration. Failure to follow these instructions will void your warranty.

1. Preparing Vehicle

- Make sure vehicle is parked on level surface.
- Set parking brake.
- If engine has run in the past two hours, let it cool down.
- Disconnect the negative battery terminal.
- Raise the front of the vehicle with a jack. Refer to your owner's manual for proper jack and jack stand placement to properly support vehicle. Support your vehicle using properly rated jack stands before wheel removal or while working under the vehicle.

NEVER WORK UNDER A VEHICLE WITHOUT USING JACK STANDS.

- Do not discard stock components after removal of the factory system.

2. Removal of stock intake system



a. Remove the bolt securing the OEM air box and loosen the hose clamp at the throttle body.



b. Pull to remove the crank case breather hose from the nipple on the head cover.



c. Unplug the IAT sensor. To unplug the IAT sensor, slide the red tab back to unlock the latch on the plug, then press in on the latch and pull the plug off of the sensor. For "grey" tabbed connectors, push the top of the gray tab in and simply pull the connector off.



d. Pull the rubber inlet hose off of the throttle body, then lift and remove the OEM air box assembly.



e. Carefully remove the IAT sensor from the OEM rubber inlet hose. Set the sensor aside for future use.



f. In the wheel well area on each side, remove the 3 clips securing the belly pan.



g. From underneath the car, remove: 3 clips, 7 screws, and 2 bolts from the belly pan. (May vary with each vehicle.)



h. Remove the belly pan.



i. For maximum performance from your intake system, you may choose to remove the air deflector. If equipped, the air deflector will be located behind the lower grill on the driver side. Removing this will provide additional cold air flow to the air filter.



j. To remove the air deflector, remove the five plastic rivets securing it to the fascia. The rivets can be removed by pulling the center pin out from the back side of the rivet.



k. **2011-13 Dodge Charger Only:** Locate the deflector and trim the specified area.



l. **2011-13 Dodge Charger Only:** Locate the front deflector and trim the specified area.



m. **2011-13 Dodge Charger Only:** Front deflector after specified area is trimmed.

3. Installation of Lower Intake System.

- a. When installing the intake system, do not completely tighten the hose clamps or mounting hardware until instructed to do so.



- b. From underneath the car, install the M8 rubber mount through the slotted hole in the sheet metal, secure with 1 M8 washer and nut. Do not completely tighten the M8 nut, this will allow room for adjustment.



- c. Hold the rubber coupler as shown, squeeze the hump end of the coupler to collapse it into itself.



- d. From underneath the vehicle, hold the collapsed coupler firmly, then insert it into the large hole in the sheet metal.



- e. Make sure that the hump is all the way through the hole, then release the coupler and manipulate it until the sheet metal “snaps” into the groove in the coupler.



f. Orient the coupler as shown.



g. Install the grommet into the lower pipe and attach the filter with one #56 clamp as shown.



h. Carefully install the IAT sensor into the grommet.



i. Install the lower pipe assembly as shown using one M8 washer, one M8 nut, and one #56 clamp.



j. Adjust the lower pipe assembly so that there is equal space between the filter, bumper support, fender liner, and marker lamp. When a good fit is achieved, tighten both nuts on the rubber mount and the #56 clamp.

4. AEM® IAT Extension Harness Kit Installation

- a. Because the stock IAT connectors vary among Dodge vehicles of the same model year, your AEM® intake system includes two IAT extension harness kits. You will only use 1 of the 2 extension harness kits. Use the appropriate harness to fit your vehicle's IAT connector.



- b. Select the appropriate IAT extension harness based on your vehicle's IAT connector. (Item L or O.) Connect the male connector to the factory harness as shown. Pull up on the red tab to lock it.



- c. Route the IAT extension harness underneath the throttle body and towards the driver side of the engine.



- d. Route the IAT extension harness and secure it with the two zip ties as shown. Position the female IAT connector next to the lower intake tube.



- e. From underneath the vehicle, plug the female IAT connector into the IAT sensor in the lower intake tube. Pull the red lock tab up to secure the connector.

5. Installation of Upper Intake System

a. When installing the intake system, do not completely tighten the hose clamps or mounting hardware until instructed to do so.



b. Loosely install a #56 hose clamp over the upper opening of the elbow hump hose.



c. Install the silicone coupler and two #56 clamps onto the throttle body. Slide the coupler all the way onto the throttle body and secure it by tightening one of the #56 clamps.




d. Insert the lower end of the upper intake pipe into the rubber coupler, and then carefully angle the other end into the throttle body coupler. The hose clamp on the rubber coupler may need to be extra loose to achieve this.



e. The lower end of the pipe should be inserted into the rubber coupler to a depth of about $\frac{3}{4}$ " to 1". Slide the pipe all the way into the throttle body coupler until it bottoms out. Once proper fitment is achieved, tighten the two remaining hose clamps.



f. **For Most Applications:** Install the supplied 1/2" ID hose between the crank case vent on the head cover and the nipple on the upper intake pipe. Secure the 1/2" hose with two small hose clamps.

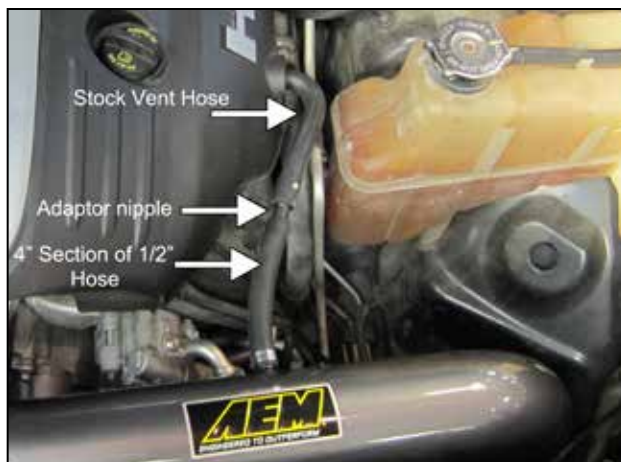

g. **On some 5.7L engines:** Connect the stock crank case vent hose to the supplied plastic adaptor nipple. Connect a 4" section of the 1/2" ID hose onto the other end of plastic adaptor nipple. Connect the hose to the intake pipe and secure with the small hose clamps as shown.



h. Install the belly pan with the 9 clips, 7 screws, and 2 bolts removed in steps 2f and 2g.



AEM® intake system installed

6. Reassemble Vehicle

- Position the inlet pipes for the best fitment. Be sure that the pipes or any other components do not contact any part of the vehicle. Tighten the rubber mount, all bolts, and hose clamps.
- Check for proper hood clearance. Re-adjust pipes if necessary and re-tighten them.
- Inspect the engine bay for any loose tools and check that all fasteners that were moved or removed are properly tightened.
- Reconnect the negative battery terminal and start engine. Let the vehicle idle for 3 minutes. Perform a final inspection before driving the vehicle.

7. CARB Sticker Placement

- The C.A.R.B. exemption sticker, (included), must be visible under the hood so that an emissions inspector can see it when the vehicle is required to be tested for emissions. California requires testing every two years, other states may vary.

8. Service and Maintenance

- a. AEM Induction Systems requires cleaning the intake system's air filter element every 100,000 miles. When used in dusty or off-road environments, our filters will require cleaning more often. We recommend that you visually inspect your filter once every 25,000 miles to determine if the screen is still visible. When the screen is no longer visible some place on the filter element, it is time to clean it. To clean, purchase our Synthetic air filter cleaner, part number 1-1000 and follow the easy instructions.
- b. Use window cleaner or a mild soap and water solution to clean your powder coated AEM® intake tube.

NOTE: DO NOT USE aluminum polish on powder coated AEM® intake tubes.

For technical inquiries
e-mail us at
sales@aemintakes.com
or
call us at
800.992.3000

AEM Air Intake System Warranty Policy

AEM® warrants that its intake systems will last for the life of your vehicle. AEM will not honor this warranty due to mechanical damage (i.e. improper installation or fitment), damage from misuse, accidents or flying debris. AEM will not warrant its powder coating if the finish has been cleaned with a hydrocarbon-based solvent. The powder coating should only be cleaned with a mild soap and water solution. Proof of purchase of both the vehicle and AEM intake system is required for redemption of a warranty claim.

This warranty is limited to the repair or replacement of the AEM part. In no event shall this warranty exceed the original purchase price of the AEM part nor shall AEM be responsible for special, incidental or consequential damages or cost incurred due to the failure of this product. Warranty claims to AEM must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is nontransferable. Improper use or installation, use for racing, accident, abuse, unauthorized repairs or alterations voids this warranty. AEM disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by AEM. Warranty returns will only be accepted by AEM when accompanied by a valid Return Merchandise Authorization (RMA) number. Credit for defective products will be issued pending inspection. Product must be received by AEM within 30 days of the date RMA is issued.

If you have a warranty issue, please call (800) 992-3000 and our customer service department will assist you. A proof of purchase is required for all AEM warranty claims.

**SOME INTAKE SYSTEMS ARE NOT LEGAL FOR
SALE OR USE ON ANY POLLUTION CONTROLLED
MOTOR VEHICLE IN CALIFORNIA OR STATES
ADOPTING CALIFORNIA EMISSION PROCEDURES.**

See aemintakes.com for CARB status on each part for a specific vehicle