
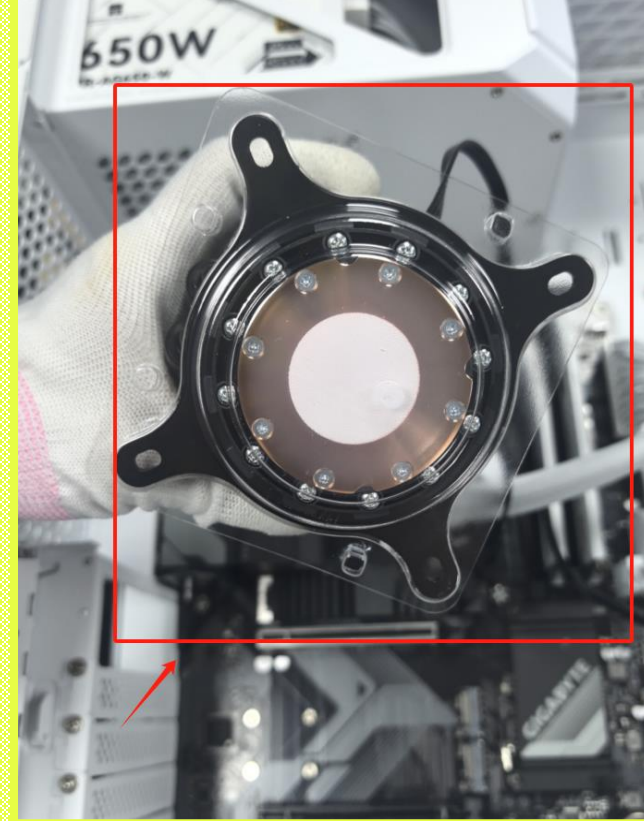
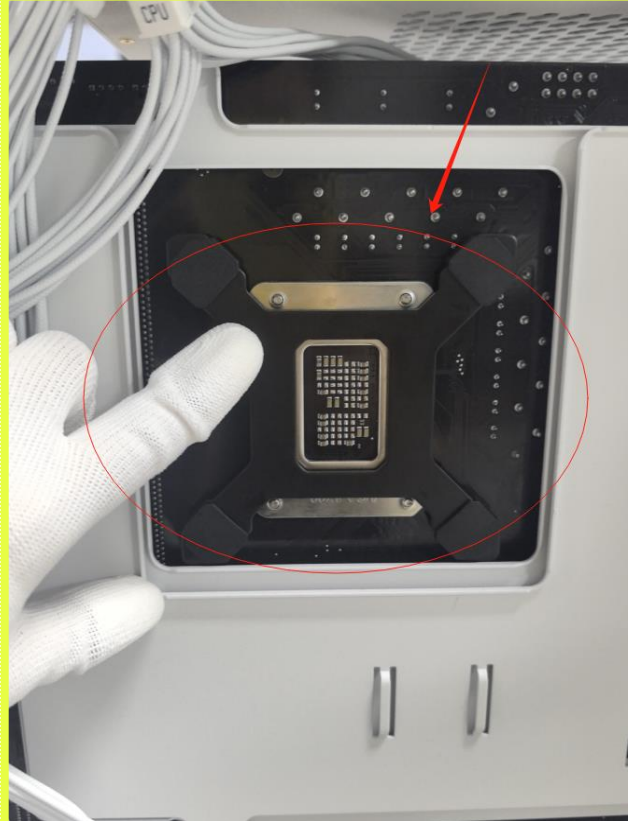


PANORAMA SE Installation Procedure:

(Intel version)

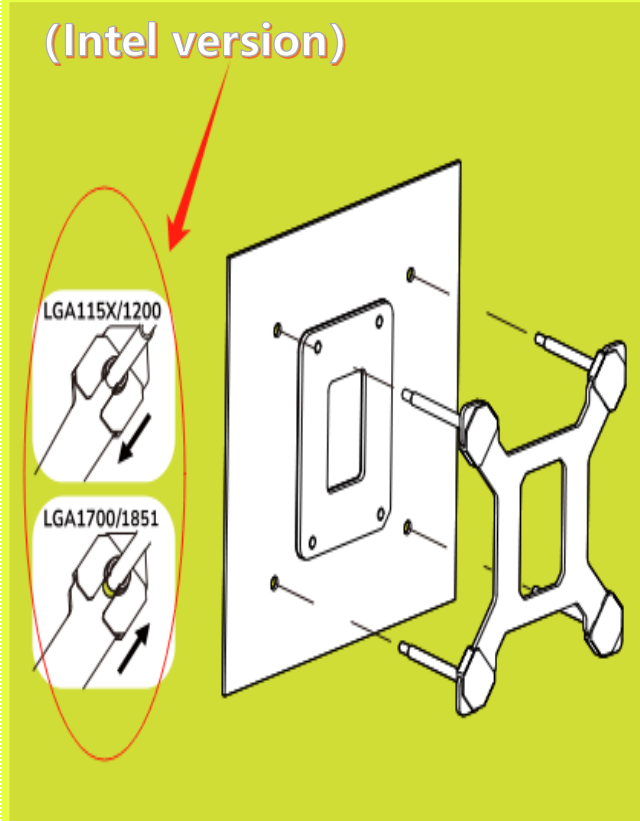

1. Adjust the position and lock the backplate. **(NB: Adjust the position according to the motherboard socket.)**


2. Install the Intel backplate from the back of the motherboard.

3. The pump head is pre-coated with thermal grease, remove the protective shell and use it directly.


4. Align the four corner holes of the pump head bracket with the backplate screws. Ensure that the four corners are aligned.




5. After locking the pump head, find the spring from the accessory bag.

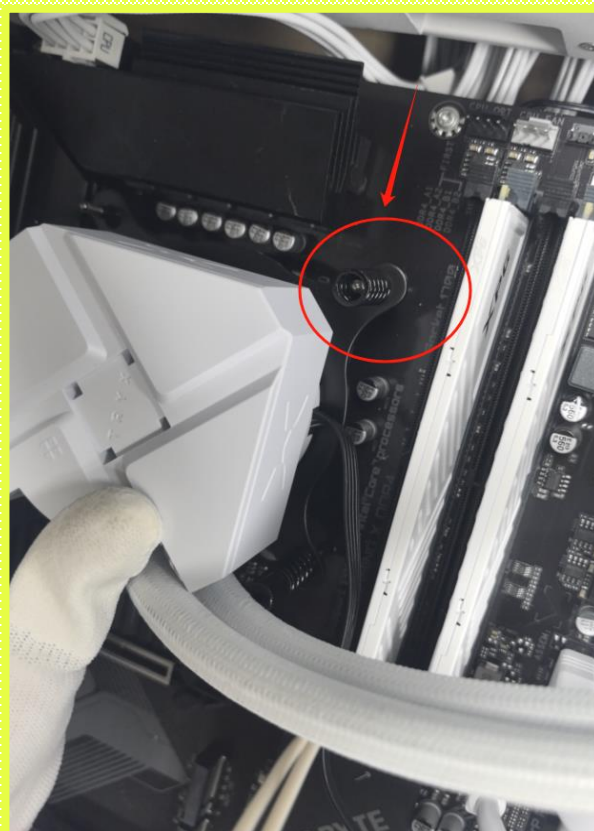


6. Install the springs at the four corners of the pump head.

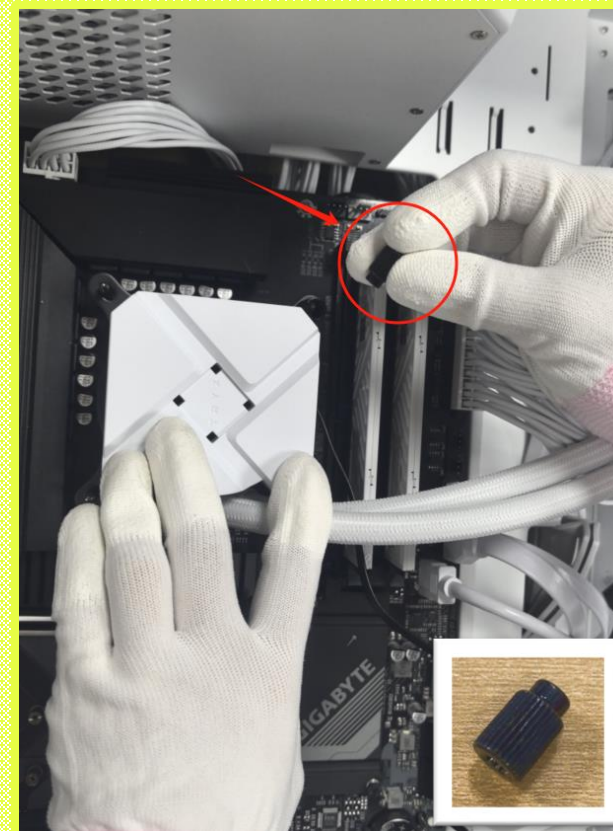


7. Find the special nuts in the accessory bag

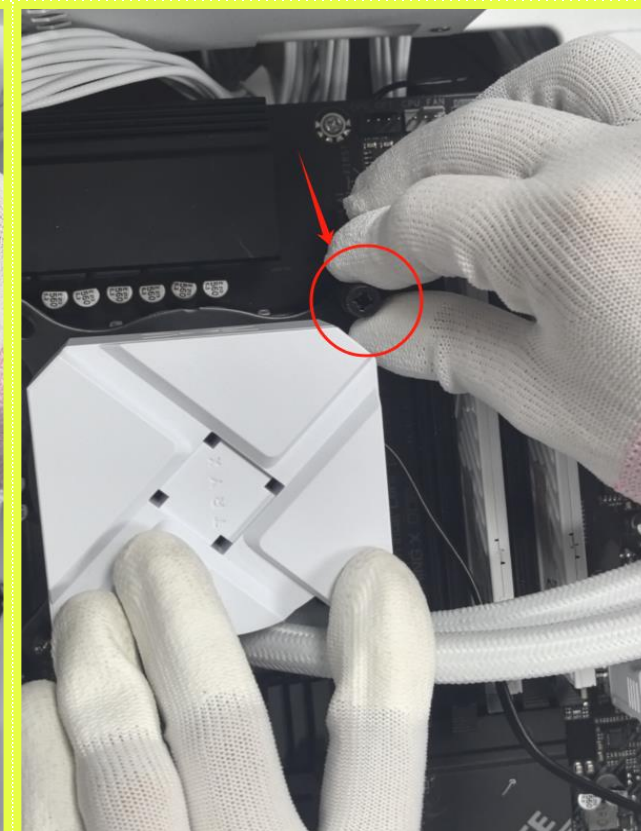


8. Tighten the nuts at the four corners of the pump head.

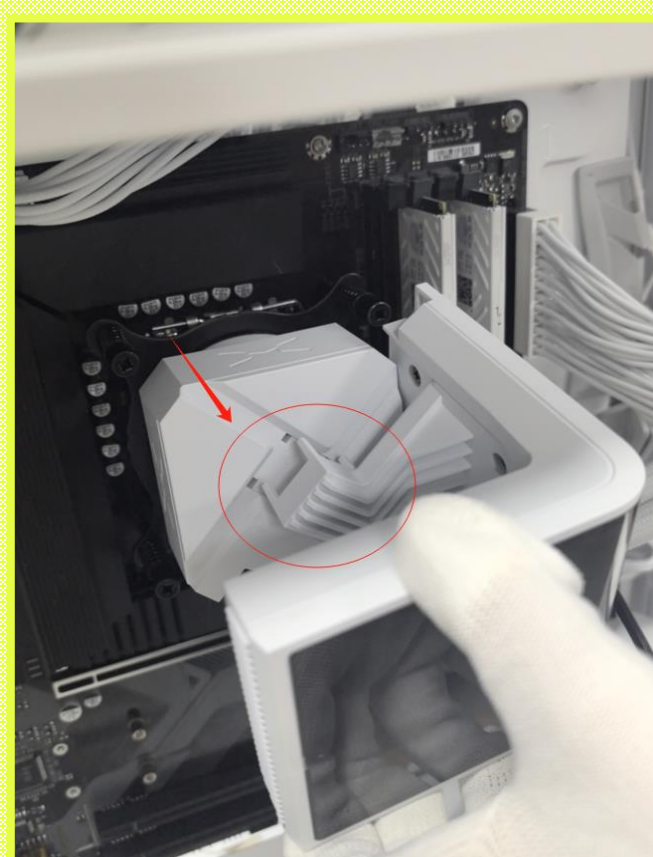


9. Install the cooler screen. It is attached by aligning the notch (can be inserted at multiple angles).

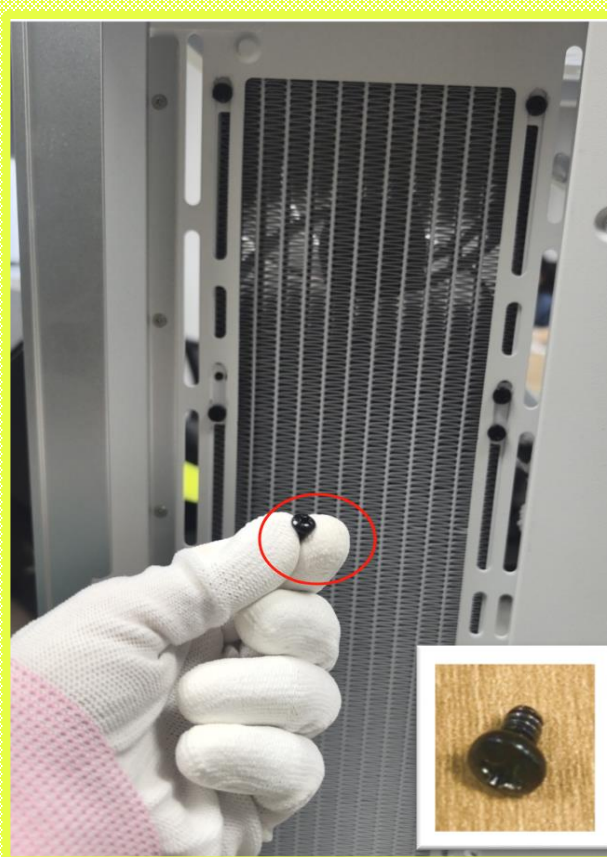

10. Lock the radiator on the chassis with the radiator screws.

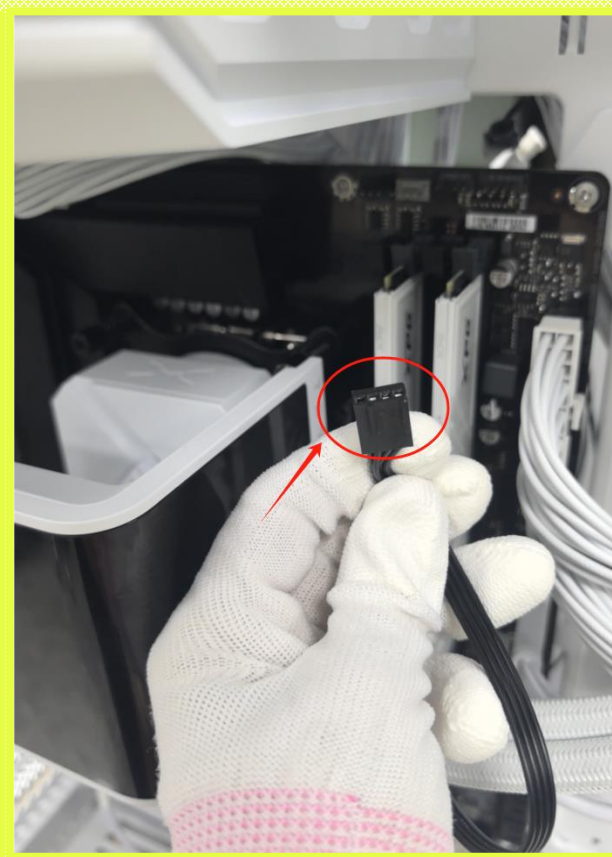

11. Connect the pump 4-pin cable to the motherboard (PUMP_FAN, AIO_PUMP)

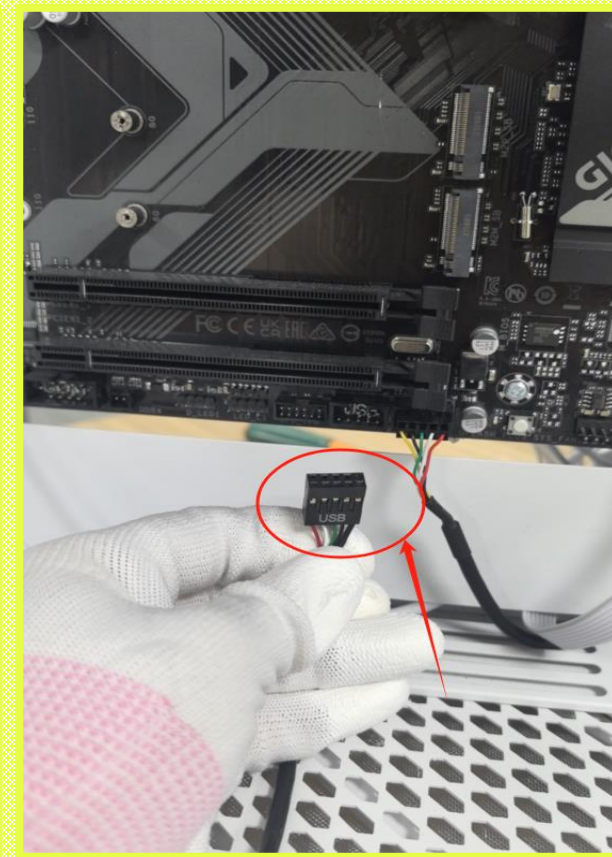

12. Connect the 9-pin usb cable from the cooler's LED screen to the motherboard USB 2.0 port.



13. Use the one-to-two fan extension cable, connect the 7-pin port to the radiator fan, and the 4-pin to the motherboard CPU-FAN; the 3-pin ARGB cable is connected to the motherboard 5V-3-pin ARGB socket.



14. Turn on the computer and light it up.

NB:

1、 Power off the PSU before installation. Power on the system after confirming that the installation is correct and complete.

2、 Pay attention to whether the wiring is connected firmly and correct.