



USER MANUAL

LABOR-SAVING ARM JACK


PEMSEM® Labor-Saving Hand Tools

What's This?

This hand jack is specifically designed to lessen the physical labor involved in lifting, positioning, and installing heavy objects. Perfect for installing wall tile, door, window, cabinet, moving furniture, cleaning underneath heavy items, or making adjustments without hassle.



About The Parts

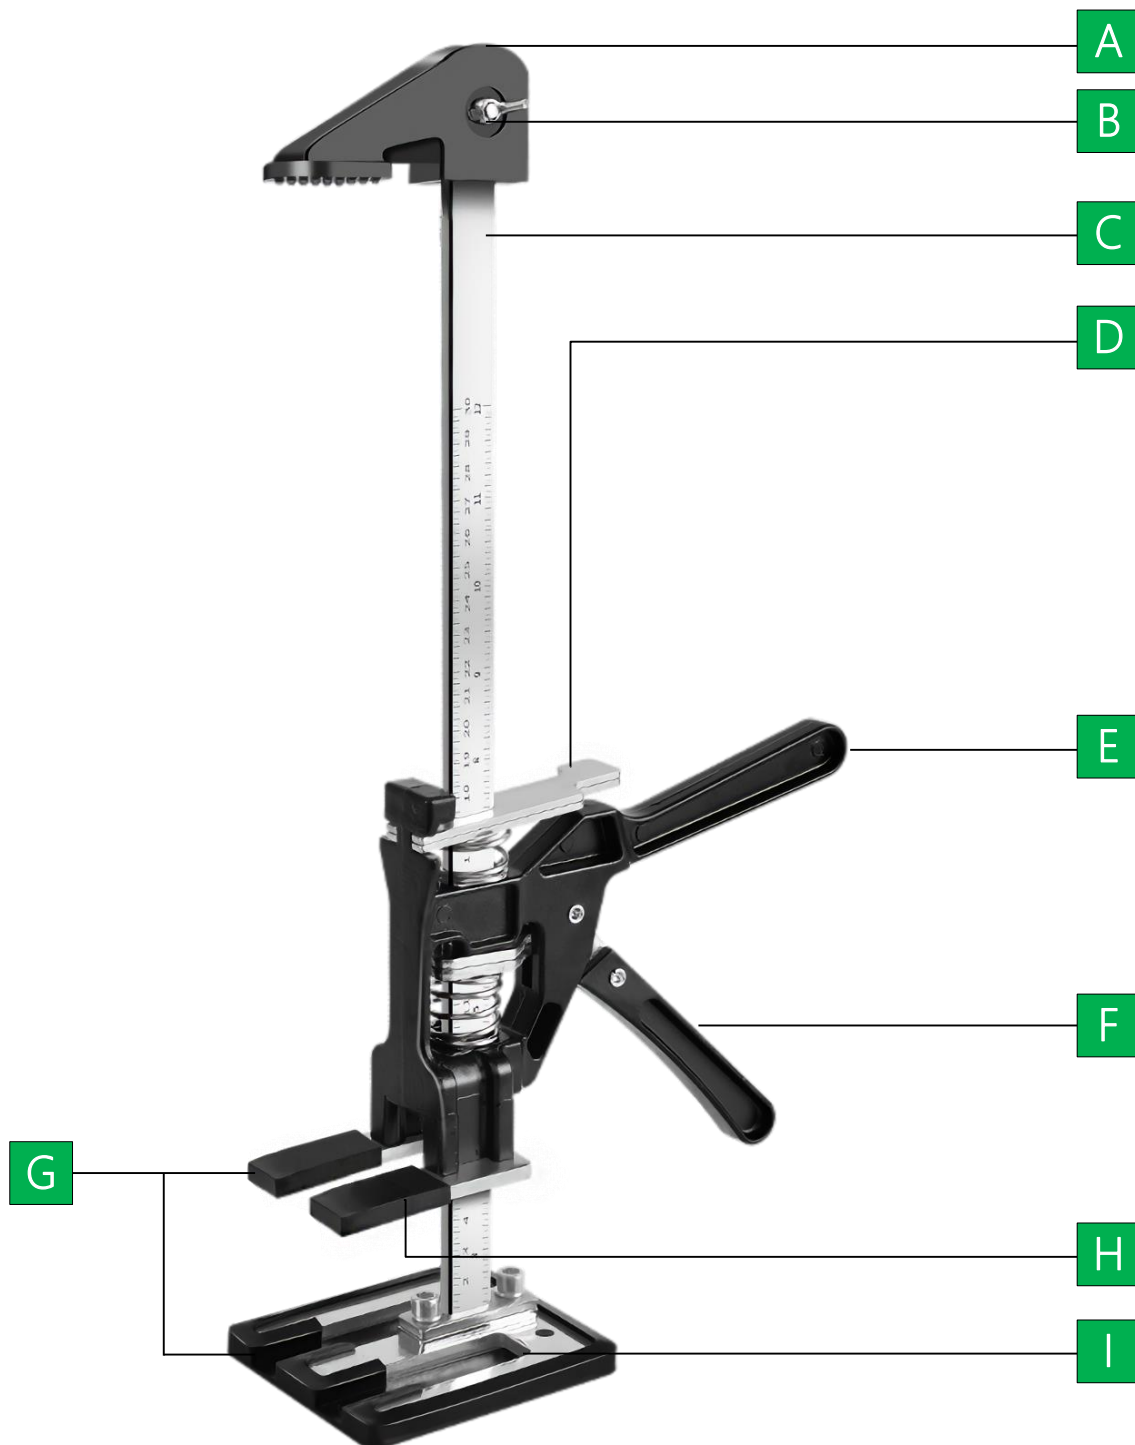

A Clamp Head

B Limit Screw

C Slide Shaft

D Decent Trigger

E Fixed Handle

F Lifting Handle

G Protective Sleeve

H Lifting Sheet

I Base Plate

How To Ascend

Use a pair of jacks together for balance and safety.

Insert the lifting piece into the gap at the bottom of the object and repeatedly twist the lifting handle upwards to lift the object to the desired height.



How To Descend

After the object is lifted to the desired height and firmly fixed, press descent trigger to release the lifting sheet to the no-load state, and then withdraw the jack.

Job finished, press down the lifting sheet with your hand while holding down the descent trigger to lower the lifting sheet to the original state.



For your safety: when lowering in loaded condition, hold the lifting handle before pressing descent trigger, then slowly release the lifting handle to avoid a sudden and rapid descent.


Use The Clamp Tool

It is also a powerful clamp and you can use the clamp function by attaching the clamp head.

- Remove the limit screw.
- Insert the clamp head into the slider shaft and tighten the screw.
- Raise the lifting sheet to hold the workpiece placed between the clamping head and the lifting sheet.



Specification

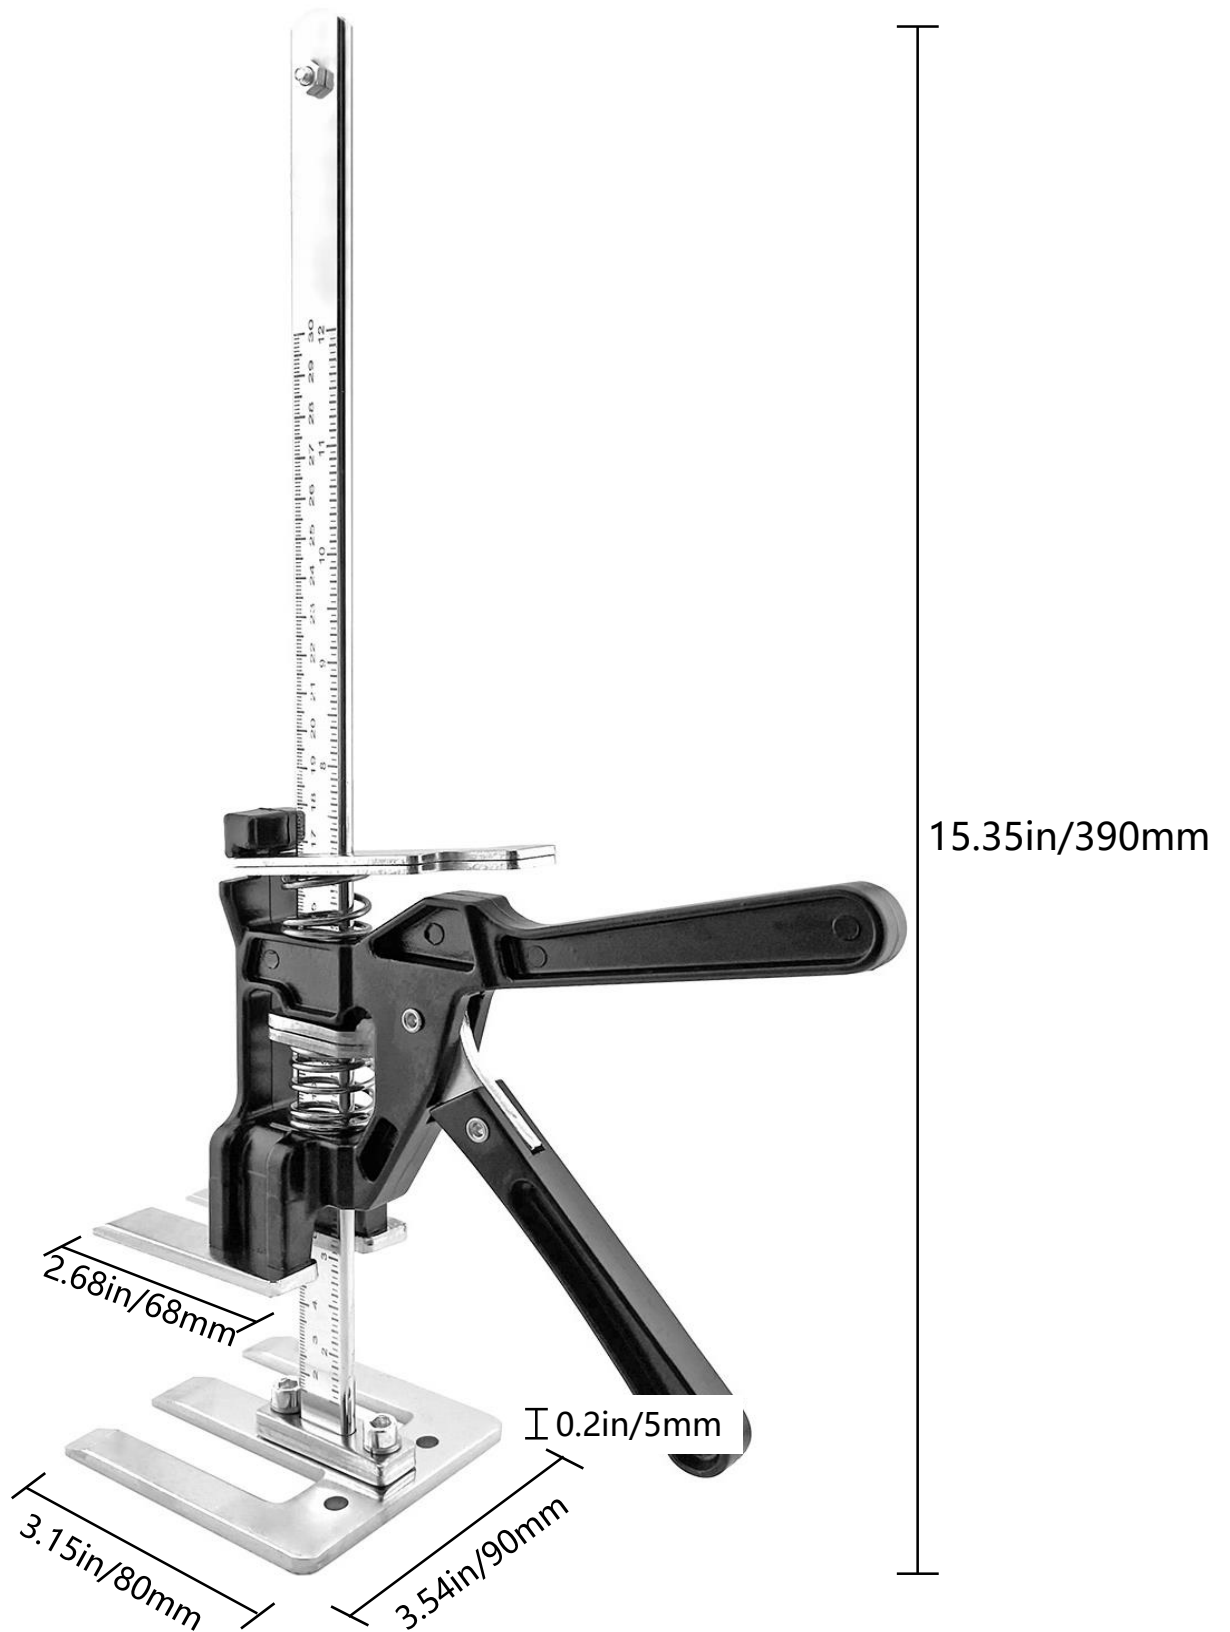


■ Lift Capacity: 220lbs/100kg ■ Lift Range: 9.84in/250mm

Tips for Use

- Please use them in pairs if possible.
- Please use them on a flat and stable platform.



- Please insert the arm into gap as much as possible.

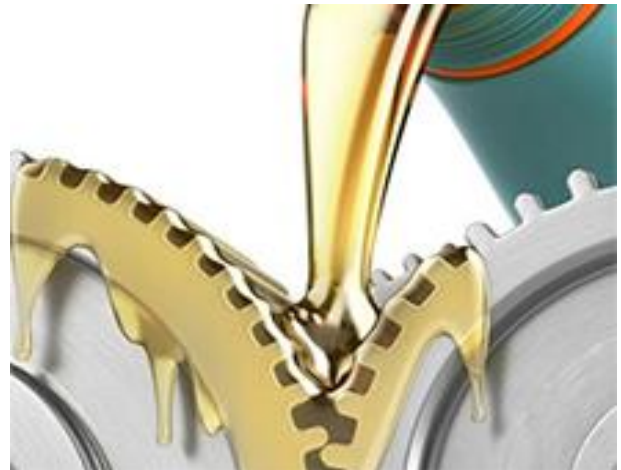

- Do not overload (less than 220lbs per jack).
- Lubricate moving parts when use is not smooth. Such as springs, and spindles. Use liquid lubricant or grease.