



INSTRUCTION MANUAL

Model: HLC-6579

ASSEMBLY GUIDE

Congratulations, you are now the owner of the new chair!

Before enjoying the comfortable chair, you have to assemble it . This assembly guide will take you through the basic assembly process. To make sure your assembly progress goes smoothly, please follow the assembly instructions **especially the important safety information.**

It is possible to assemble the chair by your own, while having **a second person to help you will make it easier.**

Please check if there are any missing parts in the package before start. If there are any issues, please don't hesitate to contact us and we'll help you ASAP.

If you run into any difficulty during the assembly, remember to check out the assembly Video to see if you've missed something. If you're still unable to resolve your problems, please contact us and our support team will assist you.







WARNING

To ensure proper assembly, please follow all steps and use all parts. Failure to follow this warning can result in serious injury to yourself or others.

Package List

- Without further ado, we kindly suggest you to list all parts needed for the chair first.


(1)*1 Back Support 	(2)*1 Seat Cushion 	(3)*2 Armrest 
(4)*1 Mechanism 	(5)*1 Gas Lift 	(6)*5 Casters 
(7)*1 Base 	(8)*5 Legs 	(9)*1 Headrest 
(10)*10 Bolts 	(11)*4 Bolts 	(12)*8 Bolts 
(13)*1 Wrench 		

Assembly Instruction


• Step 1:

Turn the Base **(7)** upside down, and then insert the Legs **(8)** one by one into the Base.

Next, screw ten Bolts **(10)** into the pre-drilled holes with the Wrench **(13)** to attach the base and the legs.

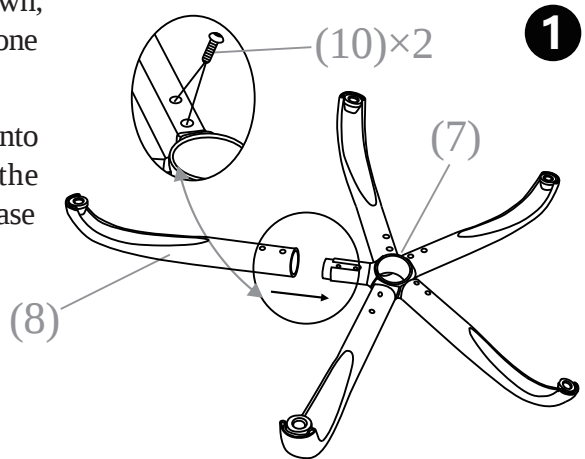

2

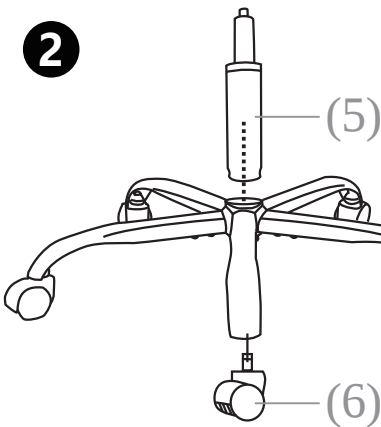

• Step 2:



Press the Casters **(6)** into the holes at the end of each Base Leg. And then insert the Gas Lift **(5)** to the base.

3

• Step 3:

Align the Mechanism **(4)** over the pre-drilled holes underneath the Seat Cushion **(2)**, make sure the front of the mechanism is facing the front of the Seat.

Attach the Mechanism to the Seat Cushion using Four Bolts **(11)**, tighten all the bolts with the Wrench **(13)**, being careful not to miss-thread the bolts or damaged the seat.

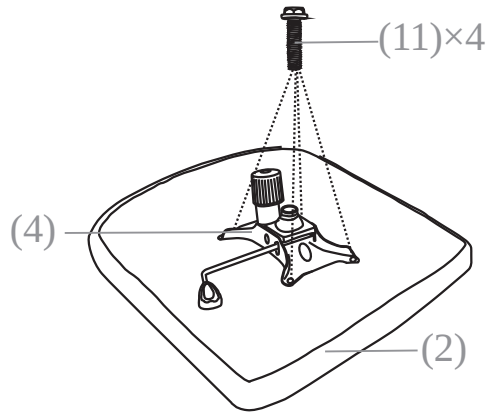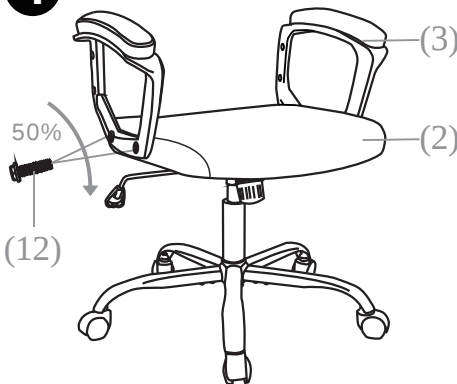**4**

• Step 4:

Turn the Seat Cushion **(2)** upright and align the center hole of the Seat Plate over the lift, then push the Seat Cushion down onto the lift firmly until the connection is secure.

Attach the Armrest **(3)** to the Seat Cushion **(2)** with Two Bolts **(12)**, using the Wrench **(13)**.

The installation of the other side Armrest is the same.


Note 1: The "Front" mark on the Armrests and the "Front" mark on the Seat Cushion should be in the same direction.

Note 2: Armrests are labeled with an "L" (left) or "R" (right) to show which side they should be placed on.


• Step 5:

Lay the Back Cushion on the seat of the chair with the top of the cushion toward the front.

Attach the Back Cushion **(1)** to the Arms by inserting one Bolt **(12)** in the Lower holes with the Wrench **(13)**.

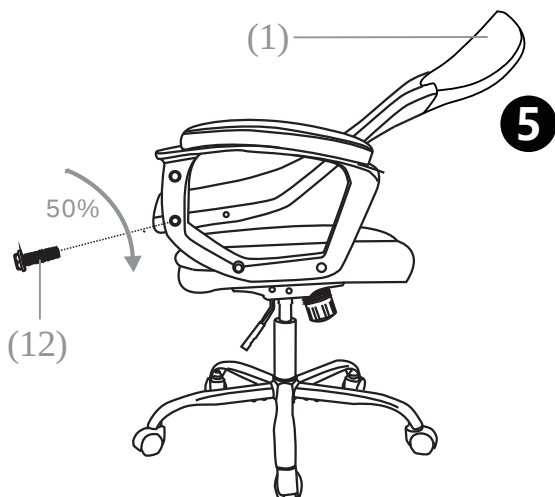

6

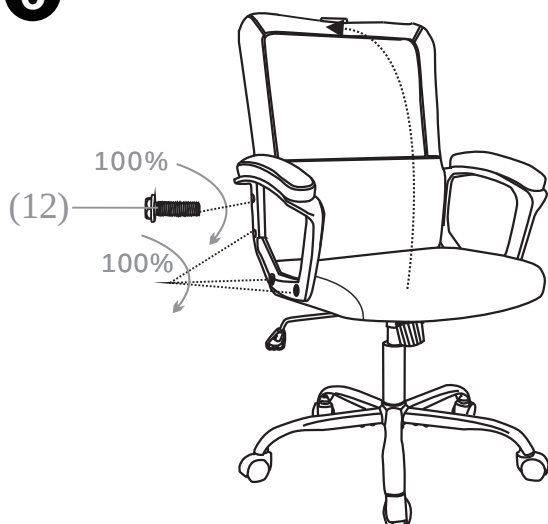

• Step 6:

Rotate the back of the chair up, then secure it with the Bolts **(12)** use the Wrench **(13)**. Adjust the balance on each side of the chair, and fully tighten all the bolts at this step.

• Step 7:

Press the Headrest (9) into the Headrest Bracket firmly.

CAUTION:


Make sure all bolts and screws are fully tightened before using chair. Lubricate all moving parts and tighten all bolts/screws every 6 month or whenever needed.



7

Instructions For Use

1. Seat Height: Paddle-shaped lever on the right side

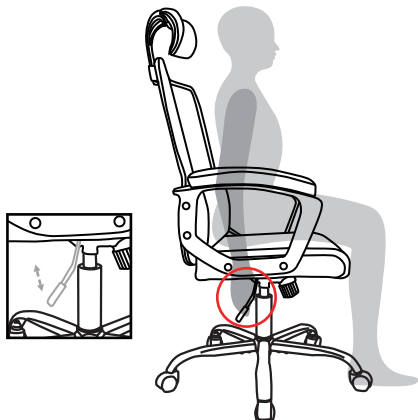

To raise:

While taking your weight off chair, lift lever up.




To lower:

While seated, lift lever up.

* At the proper height, your feet should rest flat on the floor.

2. Tilt Tension: Long stem under the seat with knob

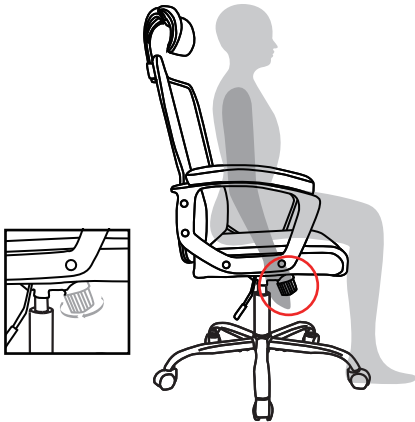

To increase tension:

While seated, turn knob forward (Counter clockwise).




To decrease tension:

While seated, turn knob backward (Clockwise).

* Set the tilt tension to control the resistance you feel when leaning back.

3. Operating the rocking function

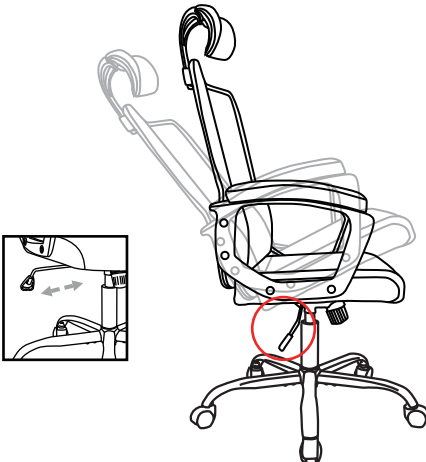

To let your chair tilt back, pull the control handle out.

To stop your chair from tilting, sit forward, then push the control handle in.

Safety And Maintenance

- Do not stand on the chair, Do Not use the chair as a stepladder.
- Use this product for seating one person at a time.
- Do not use the chair unless all bolts and screws are firmly secured.
- Avoid contact with sharp objects to prevent puncturing the fabric.
- Every 6 months, check all bolts and screws to ensure they are tight.
- To clean, spot clean only using a damp towel and mild cleaner, first test on a small, unseen area of fabric.
- Chair weight limit not to exceed 270 lbs.

Safety Information



Sit in the center of the chair, with your back to the backrest



Do not sit at the front edge of the chair



Do not stand on the chair



Do not use the chair with more than one person



Do not push the chair around when a person is sitting in it



Do not push down on the backrest when a person is reclined



Do not place all your weight on only the backrest