

Tailgate Tent with Awning

CAUTION

- Engine must be off and exhaust must be fully cooled before tent installation and use. NEVER run the vehicle engine when the tent is attached.
- Disconnect the battery or turn off the door lamps' so that they do not stay on when the hatch is open. This will reduce the risk of battery drainage.
- Allow adequate ventilation inside the tent at all times.
- Do not use candles, matches, or open flames of any kind in or near the tent.
- Do not smoke inside the tent.
- Do not store flammable liquids inside a tent.
- Do not install the tent when the temperature is below 0°C/32° F or when your vehicle is wet, it may cause damage.
- Exercise extreme caution when using fuel-powered lanterns or heaters inside or around the tent. Use battery-operated lanterns whenever possible.

CAMPSITE SELECTION

Select a smooth, level campsite clear of hard or sharp objects and avoid areas with overhead power lines and tree limbs. Park the vehicle in the chosen campsite and turn the engine off and engage the parking brake.

HOW TO STORE

1. Clean and dry the tent.
2. Fold the tent and insert into the carrying bag.
3. Store in a cool, dry place.


PACKAGE CONTENTS



Carry Bag x 1



Tent x1



Strap x 2



Accessory bag




Stake x 2

INSTALLATION INSTRUCTIONS



STEP 1

Move the tent towards the back hatch of your vehicle. Slip the tent over the hatch and wrap the bottom portion of the tent under the car.

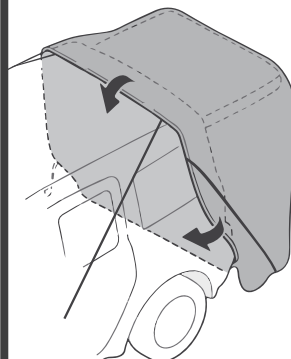


STEP 2

Pass through the strap to any gap of the wheel and adjust the straps to tighten up. Repeat on the other side.

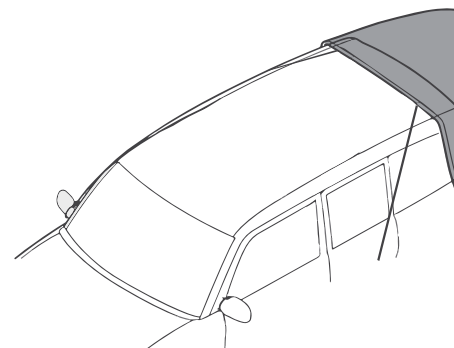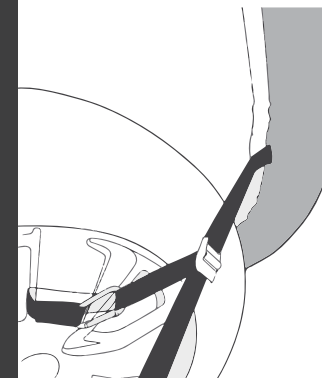

STEP 3

Use two straps with climbing buckle to secure on the roof rack (if have) or doorknob or car mirror, and adjust the straps to tighten up.

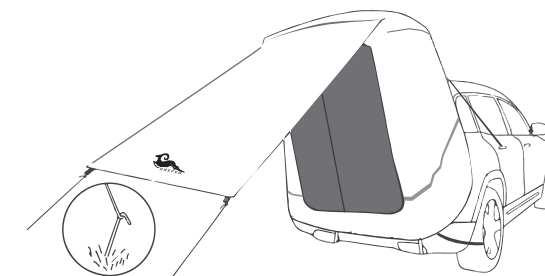

STEP 4

Setup the awning. Use the straps to connect the awning and the mental stakes, and nail the stake to the ground.