



BK-401ARC

**8K 4x1 HDMI™ Switcher
with ARC/eARC**

USER MANUAL

*Follow us on Youtube
and Facebook*



www.orei.com

Table of Contents

Introduction	04
Features	05
Package Contents	05
Specifications	06
Operation Controls and Functions	08
Remote	10
Application Example	11
FAQs & Troubleshooting	14

Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the service life of your equipment.

Registration Page

Please Activate your warranty by registering our product through the link below - **www.orei.com/register**

Technical Support

Need Help?

Our experienced Technical Support Team is here for you to answer your questions, give technical advice or help troubleshoot your project to get you installed on time and on budget. Call, email or chat with us now.

OREI Live Technical Support Hours

US team (US/Canada/Mexico): Monday-Friday, 9 a.m. - 5 p.m. Central Time

Support Email - info@orei.com | **Support Number** - 877-290-5530

Or

Chat Live on www.orei.com

Send us an instant message now. Our Technical Support Team will respond momentarily. Available during live support hours.

Introduction

The BK-401ARC is an 8K HDMI switch featuring 4 HDMI inputs and 1 HDMI output, allowing you to connect multiple devices to your TV. It can also extract audio from your sources and output it via S/PDIF and L/R ports. Compliant with HDMI 2.1 and HDCP 2.3, it supports video resolutions up to 8K@60Hz 4:2:0 or 4K@120Hz 4:4:4. With a video bandwidth of up to 48Gbps FRL and 18Gbps TMDS, it supports HDR10+, HLG, and Dolby Vision pass-through. It also supports ARC/eARC allowing you to connect an ARC/eARC Soundbar to the Input 1 and extract audio from the ARC/eARC TV connected to the output. CEC enables control of the soundbar's volume through your TV remote. It offers advanced EDID management, a compact design, and easy plug-and-play installation, making it perfect for personal or commercial setups.



Features & Package Contents

1. HDCP 2.3 Compliant
2. 48Gbps FRL & 18Gbps TMDS video Bandwidth
3. Video resolution up to 8K@60Hz 4:2:0 12bit and 4K@120hz 4:4:4 12bit
4. HDR/10/10+, Dolby Vision and HLG pass-through
5. VRR, ALLM, QMS, QFT and SBTM support
6. CEC Control: Control the soundbar and input devices through the TV remote.
7. Advanced EDID Management
8. Plug and play setup

Package Contents

1.	BK-401ARC	1 pcs
2.	Remote	1 pcs
3.	Power Adapter	1 pcs
4.	User Manual	1 pcs

Specifications


Technical	
HDMI Compliance	HDMI 2.1
HDCP Compliance	HDCP 2.3
Video Bandwidth	48Gbps FRL and 18Gbps TMDS
Video Resolution	Up to 8K@60Hz 4:2:0 12bit, 8K@30Hz 4:4:4 12bit, 4K@120Hz 4:4:4 12bit
Color Space	RGB_4:4:4, YCbCr_4:4:4, YCbCr_4:2:2, YCbCr_4:2:0
Color Depth	8/10/12bit
Audio Formats	HDMI Input/Output: LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X, DSD eARC Audio Out: LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X, DSD Optical: LPCM 2.0CH/Dolby/DTS 5.1CH Analog: LPCM 2.0CH
HDR	HDR, HDR10, HDR10+, Dolby Vision, HLG
ESD Protection	IEC 61000-4-2: ±8kV (Air-gap discharge) & ±4kV (Contact discharge)

Specifications

Connection				
Input	4 × HDMI [Type A, 19-pin female]			
Output	1 × HDMI [Type A, 19-pin female] 1 × OPTICAL [S/PDIF] 1 × L/R [3.5mm Stereo Mini-jack]			
Control	1 × SERVICE [USB Type C, Update port]			
Mechanical				
Housing	Metal Enclosure			
Color	Black			
Dimensions	L: 176mm / 6.92in W: 68mm / 2.67in H: 18mm / 0.7in			
Weight	315g / 11.11oz			
Power Supply	Input: AC100-240V 50/60Hz, Output: DC 5V/1A (US/EU standards, CE/FCC/UL certified)			
Power Consumption	2.5W (Max)			
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F			
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F			
Relative Humidity	20-90% RH (non-condensing)			
Recommended HDMI Cable				
Video Resolution	8K	4K60	4K24	1080P
HDMI Cable Length (HDMI IN/OUT)	2m/6.6ft (Ultra HDMI 2.1)	8m/26ft	12m/39ft	15m/49ft
The use of "Premium High Speed HDMI" cable is highly recommended.				

Operation Controls and Functions

Front Panel




No.	Name	Function Description
1.	IR window	IR signal receiving window.
2.	Power LED	The Red LED will light up when the device is powered on.
3.	IN 1/2/3/4 LED	The corresponding Green LED will light up when the respective input source is selected.
4.	OUT LED	The Green LED will light up when a display device is connected.
5.	AUTO LED	The Green LED will light up when the Auto switching function is turned on.
6.	eARC LED	▪ On: The ARC/eARC function is turned on. CEC communication and ARC/eARC is working properly. ▪ Flashing: The ARC/eARC function is turned on. CEC communication and ARC/eARC is not working properly. ▪ Off: The ARC/eARC function is turned off.
7.	eARC switch	Press the button to turn on/off ARC/eARC function.
8.	SWITCH button	Used to switch between the connected media sources ▪ Short press this button to circularly switch between the connected media sources. ▪ Long press for 3 seconds to turn on/off the auto switching function.

Operation Controls and Functions

No.	Name	Function Description
9.	EDID DIP switch	Use the DIP switch to set EDID. 111 - Copy OUT port sink EDID (as default) 110 - Video EDID copy sink EDID, Audio EDID Copy soundbar EDID 101 - FRL 12G_8K_HDR, Audio 2ch PCM 100 - FRL 12G_8K_HDR, Audio 5.1ch PCM/DTS/DOLBY 011 - FRL 12G_8K_HDR, Audio 7.1ch PCM/DTS/DOLBY/HD 010 - FRL 10G_8K_HDR, Audio 2ch PCM 001 - FRL 10G_8K_HDR, Audio 5.1ch PCM/DTS/DOLBY 000 - FRL 10G_8K_HDR, Audio 7.1ch PCM/DTS/DOLBY/HD
10.	SERVICE	Firmware update and debug port.

Rear Panel



No.	Name	Function Description
1.	IN 1/2/3/4	Connect a media device such as a DVD Player, Streaming device. Note: When the ARC/eARC function is turned off, connect the "IN 1(eARC)" port to HDMI source device to work as a signal input port; When the ARC/eARC function is turned on, connect the "IN 1(eARC)" port to a Soundbar or amplifier with ARC/eARC function to output the audio signal from other HDMI source, or the audio returned from the TV connected to the "OUT(eARC)" port. Please refer to "Application Example" for more details.

Operation Controls and Functions & Remote

No.	Name	Function Description
2.	OUT (eARC)	Connect a HDMI display device such as a TV, Projector, etc.
3.	OPTICAL	Optical fiber audio output port.
4.	L/R	Analog audio output port.
5.	DC 5V	Connect the included power adapter

Remote



eARC:

Press this button to turn on/off ARC/eARC function.

Auto:

Press this button to enable or disable auto switching.

1/2/3/4:

Press 1/2/3/4 button to select the corresponding signal input source.


C:

Press this button to circularly switch between the connected media sources.

Application Example

Situation 1

When the ARC/eARC function is turned off, the connection is as following. In this situation, the Optical and L/R audio outputs will output audio from the selected media device.

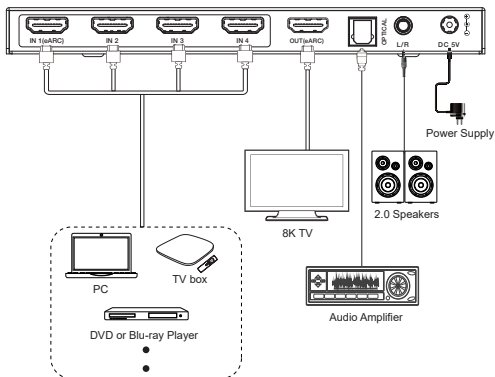


Situation 2

When the ARC/eARC function is turned on, select the input port 1 by pressing the "SWITCH" button on the front panel or the 1 button on the IR remote, then connect the "IN 1(eARC)" port to a Soundbar to output the audio signal returned from the "OUT (eARC)" port, as shown in the figure below. (For example, when the user watches TV apps, the Switcher will pass-through TV ARC/eARC audio to the Soundbar.)

Application Example

In this situation, the Optical and L/R audio outputs will output audio from the TV.

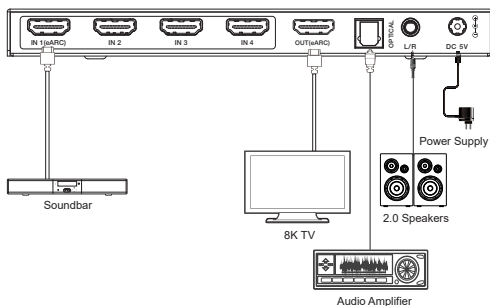

Note:


1. If the 8K TV supports ARC/eARC function, the Soundbar will receive the audio signal returned from the TV. It will not work if your TV doesn't support ARC/eARC
2. The IN 1 channel will be locked when it is selected as the input source. At this moment, other input channels will not be identified automatically even if Auto Switching is enabled. For example, if the IN 3 is connected to a source device now, it will not be output as the signal source automatically because the IN 1 is locked.

Application Example

Situation 3

When the ARC/eARC function is turned on, select the input port 2/3/4 by pressing the “SWITCH” button on the front panel or the buttons on the remote. If you connect the “IN 1(eARC)” port to a Soundbar now, it will output the audio signal from the selected input channel.

In this situation, the Optical and L/R audio outputs will output audio from the selected input channel.

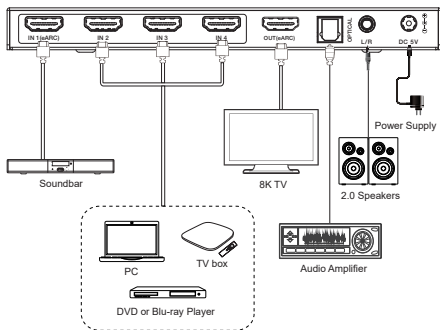

Note:

In this situation, the Soundbar will not output the audio returned from the 8K TV connected to the OUT port, no matter the 8K TV supports ARC/eARC or not.



The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

FAQs & Troubleshooting

1. What is the maximum length of the HDMI outputs?

We recommend using High Quality HDMI cables under 30 feet.

2. Can I use a Capture Card to record games from my PlayStation or Xbox?

Our devices are HDCP compliant and will not work with capture cards.

3. Can I display both game consoles at the same time on my TV, side by side?

No, you can only display one source at a time.

4. I am not getting HDMI output

Try the steps below:

1. Change the HDMI cable
2. Change the resolution from the source
3. Change the EDID settings on the BK-21A (Refer Page 09)

5. VRR and Other HDMI 2.1 Features not working

Please check if your display supports VRR, ALLM and FVA. Confirm that VRR works when connecting the source directly to the display. Confirm if you are using high quality HDMI 2.1 cables.

6. Audio outputs not working

Please check the audio output format from the source. The audio format from the source should match the capabilities of the audio outputs. (Refer Page 06)

FAQs & Troubleshooting

Still have some questions?

Please feel free to contact us at: info@orei.com. OR Fill out the form on the 'Contact Us' page on the website.
Our team will be more than happy to help you.

OREI Live Technical Support Hours

US team (US/Canada/Mexico): Monday-Friday, 9 a.m. - 5 p.m. Central Time
Support Email - info@orei.com | **Support Number** - 877-290-5530



**8K 4x1 HDMI™ Switcher
with ARC/eARC**

BK-401ARC

www.orei.com

© 2024