

Installation manual of Tesla 3. Y multifunctional intelligent LCD instrument

Note:

- 1.The installation instructions may differ slightly from the actual operation. If there are any differences,please follow the actual situation or contact us.
- 2.Warning: Please do not disassemble any part by yourself,any improper operation will not be covered by our warranty.



1.Remove the left and right trim panels of the central control panel




2.Use a # 15 hexagon screwdriver to remove the trim panel at the front passenger's knee position



3.Unfasten the wire harness attached to the trim panel



4.Find the OBD plug (most versions of the ODB plug are gray).

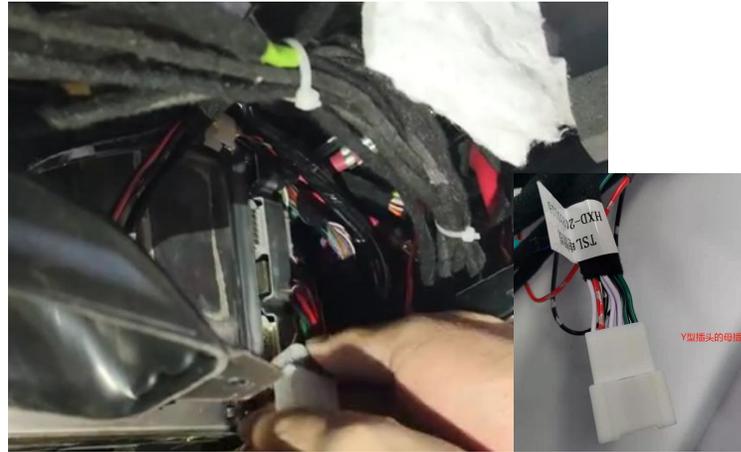

5.Connect the OBD plug to the female plug of the Y-type plug provided by us



6.Insert the connected plug into the original position of the OBD plug



7. The effect of plug installation is shown in the figure




8. Get the wire harness out of this hole



9. Then thread the wire harness to this position, as shown in the figure




10. Remove the entire central control panel

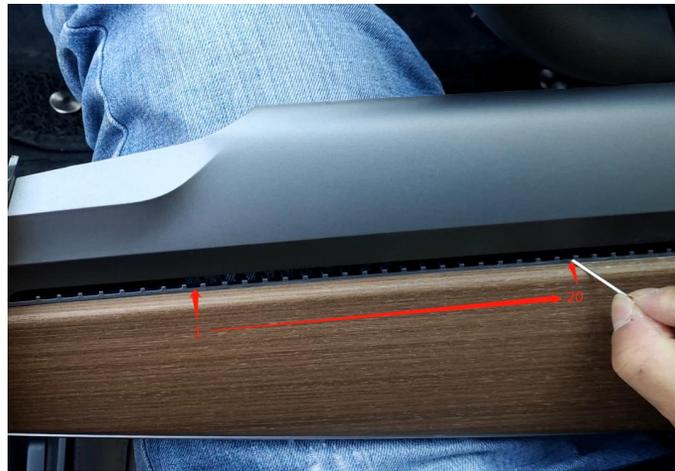


11. Count from the first hole with a real hole to the 20th grid (mark on the 20th grid).



12. Insert the wire harness into the corresponding grid in sequence

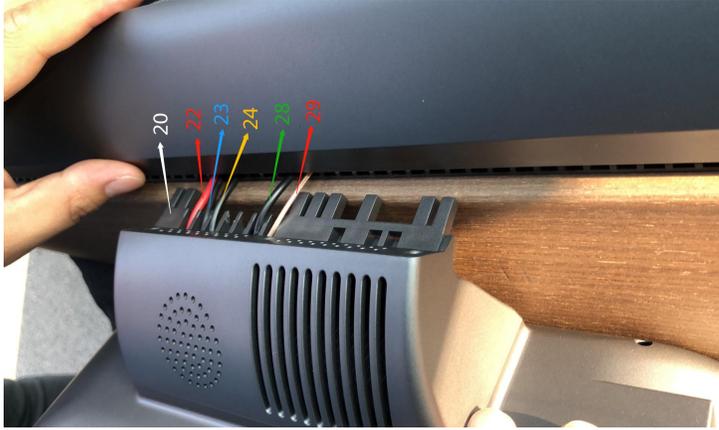


13. The wiring harness installation effect is shown in the figure. If any wiring harness is installed incorrectly, it will cause the risk of wiring harness damage (the number marked on each wiring harness is the position of the corresponding hole).

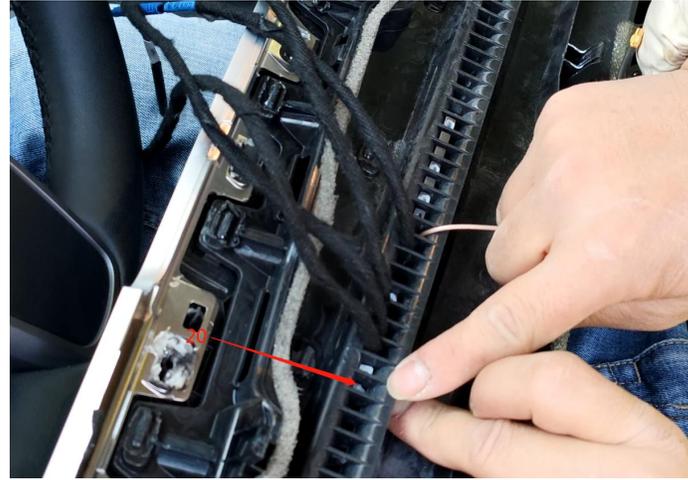

14. Check the correct installation through the back of the trim panel, as shown in the figure.



15. Pass the wiring harness through the grey fixing plate in sequence and fix the grey plate with screws.

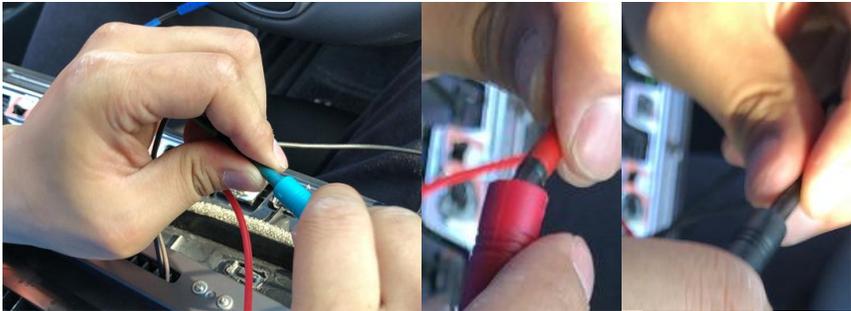

16. After fixing the plate, insert the plugs corresponding to all colors. Restore the trim panel when there is no problem with the screen test. (the blue wire harness is the front camera wire harness. If there is no option to purchase the front camera, there is no need to connect it.).

Installation procedure of front camera



Camera accessories

Plug No.1 is the same as plug No.2



1. Install the camera bracket under the front license plate and tighten the screws. If it cannot be fixed, use glue and double-sided tape.



3. Find the rubber circle in the figure from the bottom of the passenger's foot and poke a small hole in the rubber, Thus, put the No. 2 plug out of the front cover from here, and connect the No. 3 plug with the No. 2 plug. no.1 plug is connected with the "front camera" plug of our display in the car, and the installation can be completed.



2. Put the No. 3 plug in the camera accessories on the fishing line, and pull it into the front cover to be inserted with the No. 2 plug.

Function and operation:

Steering wheel right button and finger touch screen

Right button of steering wheel: up, down, left, right, long press left, long press right.

Six function keys: up is to slide up the screen interface, down is to slide down the screen interface. Press the left key to exit the application, and press the right key to confirm.

Long press the left key to display or cancel the display of the code table. Long press the right button to activate Siri or voice system

The linkage and brightness between the home screen and the steering wheel screen automatically follow the home screen

Installation tutorial video

