


## ⊙ Specifications:

HARDWARE FEATURES	
Interface	4 10/100Mbps LAN Ports 1 10/100Mbps WAN Port
Button	WPS/Reset Button Power On/Off Button WiFi On/Off Switch
External Power Supply	9VDC / 0.6A
Wireless Standards	IEEE 802.11n, IEEE 802.11g, IEEE 802.11b
Antenna	2*5dBi Fixed Omni Directional Antenna (RP-SMA)
Dimensions ( W x D x H )	7.6 x 5.1 x 1.3 in. (192 x 130 x 33 mm)
WIRELESS FEATURES	
Frequency	2.4-2.4835GHz
Signal Rate	11n: Up to 300Mbps(dynamic) 11g: Up to 54Mbps(dynamic) 11b: Up to 11Mbps(dynamic)
EIRP	<20dBm(EIRP)
Reception Sensitivity	270M: -68dBm@10% PER 130M: -68dBm@10% PER 108M: -68dBm@10% PER 54M: -68dBm@10% PER 11M: -85dBm@8% PER 6M: -88dBm@10% PER 1M: -90dBm@8% PER
Wireless Functions	Enable/Disable Wireless Radio, WDS Bridge, WMM, Wireless Statistics
Wireless Security	WEP, WPA / WPA2, WPA-PSK / WPA2-PSK
SOFTWARE FEATURES	
WAN Type	Dynamic IP/Static IP/PPPoE/ PPTP(Dual Access)/L2TP(Dual Access)/BigPond
DHCP	Server, Client, DHCP Client List, Address Reservation
Quality of Service	WMM, Bandwidth Control
Port Forwarding	Virtual Server, Port Triggering, UPnP, DMZ
Dynamic DNS	DynDns, Comexe, NO-IP
VPN Pass-Through	PPTP, L2TP, IPSec (ESP Head)
Access Control	Parental Control, Local Management Control, Host List, Access Schedule, Rule Management
Firewall Security	DoS, SPI Firewall IP Address Filter/MAC Address Filter/Domain Filter IP and MAC Address Binding
Management	Access Control Local Management Remote Management

⊙ Specifications:

OTHERS	
Certifications	CE, FCC, RoHS, Wi-Fi
System Requirements	Microsoft® Windows® 98SE, NT, 2000, XP, Vista™ or Windows 7, MAC® OS, NetWare®, UNIX® or Linux.
Environment	Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

⊙ Diagram:

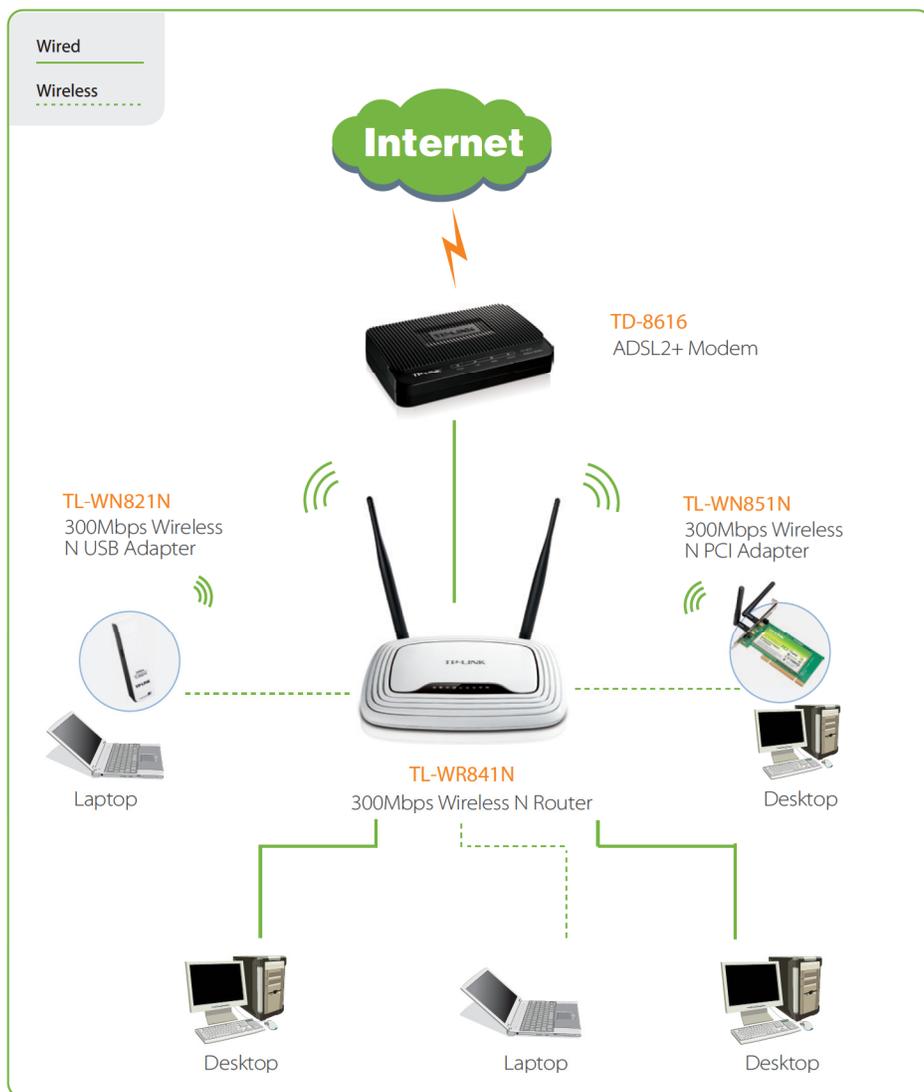

Package:

- 300Mbps Wireless N Router TL-WR841N
- Power supply unit
- Resource CD
- Quick Installation Guide