

2-Way Indoor/Outdoor Speaker System

1/2" High Compliance Polymer Tweeter

USER GUIDE

PYLE
PyleUSA.com

MOUNTING THE BRACKET


1. Remove the bracket knobs and the bracket from the speaker
2. Hold the bracket up to the mounting surface.
"PDWR" can be mounted either horizontally or vertically, hold the bracket so that the speaker wire fits through the large, circular wire hole in the bracket, align the bracket to be square with the surrounding (**Use A level for accuracy**)
3. Mark the locations of the three shaped screw holes, use all of the holes
4. Drill pilot holes into the mounting surface
5. Gently pull the speaker wire through the wire hole in the center of the mounting bracket, the bracket so that the holes all line up.
6. Use your hardware to attach the bracket to the mounting surface.

FINAL ADJUSTMENTS

1. After checking that the speaker is in-phase and works correctly, angle the speaker for the best sound.
2. Hand tighten the bracket knobs only, power tools may over-tighten the knob, and strip the threads of the insert.
3. Check that the entire installation is safe and secure.



MOUNTING

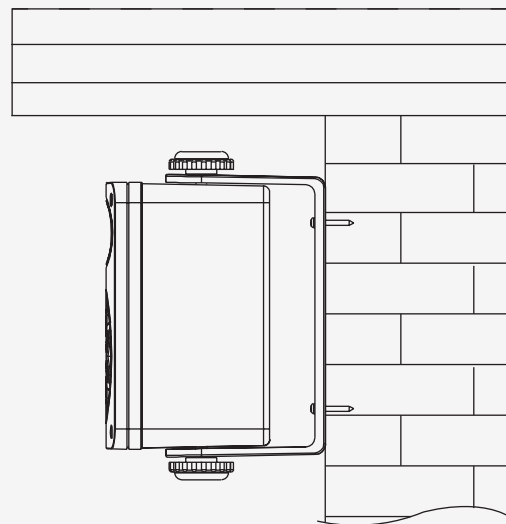

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

Technical Specs:

Model Number	Peak Power	RMS Power	Subwoofers Size	Midranges	Tweeter	Frequency Response	Magnet	Impedance	Colour
PDWR35WT	200 Watt	100 Watt	3.5"	1.75"	0.5"	70-21 kHz	24 Oz	8 Ohm	White
PDWR35BK	200 Watt	100 Watt	3.5"	1.75"	0.5"	70-21 kHz	24 Oz	8 Ohm	Black
PDWR35YL	200 Watt	100 Watt	3.5"	1.75"	0.5"	70-21 kHz	24 Oz	8 Ohm	Yellow
PDWR35RD	200 Watt	100 Watt	3.5"	1.75"	0.5"	70-21 kHz	24 Oz	8 Ohm	Red
PDWR35BL	200 Watt	100 Watt	3.5"	1.75"	0.5"	70-21 kHz	24 Oz	8 Ohm	Blue

Model Number	Peak Power	RMS Power	Subwoofers Size	Midranges	Tweeter	Frequency Response	Magnet	Impedance	Colour
PDWR45WT	300 Watt	150 Watt	4"	1.75"	0.5"	60-21 kHz	30 Oz	8 Ohm	White
PDWR45BK	300 Watt	150 Watt	4"	1.75"	0.5"	60-21 kHz	30 Oz	8 Ohm	Black
PDWR45YL	300 Watt	150 Watt	4"	1.75"	0.5"	60-21 kHz	30 Oz	8 Ohm	Yellow
PDWR45RD	300 Watt	150 Watt	4"	1.75"	0.5"	60-21 kHz	30 Oz	8 Ohm	Red
PDWR45BL	300 Watt	150 Watt	4"	1.75"	0.5"	60-21 kHz	30 Oz	8 Ohm	Blue

Model Number	Peak Power	RMS Power	Subwoofers Size	Midranges	Tweeter	Frequency Response	Magnet	Impedance	Colour
PDWR55WT	500 Watt	250 Watt	5.25"	1.75"	0.5"	50-21 kHz	40 Oz	8 Ohm	White
PDWR55BK	500 Watt	250 Watt	5.25"	1.75"	0.5"	50-21 kHz	40 Oz	8 Ohm	Black
PDWR55YL	500 Watt	250 Watt	5.25"	1.75"	0.5"	50-21 kHz	40 Oz	8 Ohm	Yellow
PDWR55RD	500 Watt	250 Watt	5.25"	1.75"	0.5"	50-21 kHz	40 Oz	8 Ohm	Red
PDWR55BL	500 Watt	250 Watt	5.25"	1.75"	0.5"	50-21 kHz	40 Oz	8 Ohm	Blue



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

[PyleUSA.com/ContactUs](https://www.pyleusa.com/ContactUs)

PYLE

California Prop 65 Warning



WARNING:

This product contains Nickel carbonate which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: www.P65warnings.ca.gov