


IN-CEILING SPEAKERS

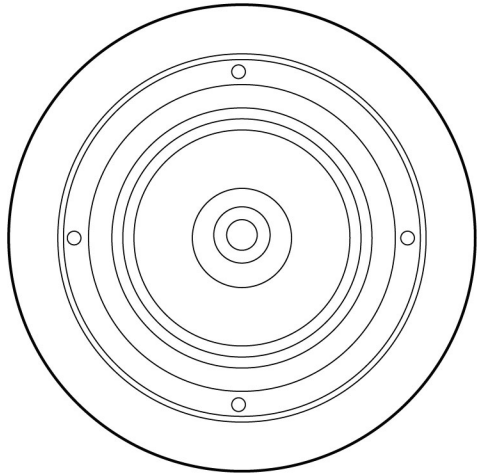

PDIC1651RD
PDIC1661RD
PDIC1681RD

IN-CEILING SPEAKER INSTALLATION MANUAL

Thank you for purchasing this PYLE in-ceiling speaker system. It is a state-of-the-art product carefully designed and manufactured for your installation needs, and has been thoroughly tested to ensure consistent and reliable performance.

If you have any question about the installation or operation of your PYLE in-ceiling speaker system which are not answered by this manual, contact your dealer immediately.

PDIC1651RD **5.25" 150 Watt 2-Way** *Ceiling / Wall Speakers (Pair)*

Specifications:

- In-Wall / In-Ceiling System
- 2-Way Stereo Sound Speakers
- Includes (2) 5.25-inch Speakers
- 1/2" High Compliance Polymer Tweeter
- Polypropylene Cone with Rubber Edge
- Mounts Flush on Walls or Ceilings
- Environmentally Friendly ABS Construction
- Perfect for Custom Installations & Applications
- Includes Round Stain Resistant Grills
- Cut-Out Template for Easy Installation

Technical Specs:

- 150 Watt Rated Peak Power
- Frequency Response: 80Hz-20kHz
- Impedance: 16 Ohms
- Sensitivity: 88 dB
- Total Unit Dimensions (Diameter x Depth): 8.0" x 3.0"
- Cutout Diameter: 6.5", Cutout Mounting Depth: 2.6"

PDIC1681RD **8" 250 Watt 2-Way** *Ceiling / Wall Speakers (Pair)*

Specifications:

- In-Wall / In-Ceiling System
- 2-Way Stereo Sound Speakers
- Includes (2) 8-inch Speakers
- 1/2" High Compliance Polymer Tweeter
- Polypropylene Cone with Rubber Edge
- Mounts Flush on Walls or Ceilings
- Environmentally Friendly ABS Construction
- Perfect for Custom Installations & Applications
- Includes Round Stain Resistant Grills
- Cut-Out Template for Easy Installation

Technical Specs:

- 250 Watt Rated Peak Power
- Frequency Response: 50Hz-20kHz
- Impedance: 16 Ohms
- Sensitivity: 89 dB
- Total Unit Dimensions (Diameter x Depth): 10.7" x 3.5"
- Cutout Diameter: 9.3", Cutout Mounting Depth: 3.5"

PDIC1661RD **6.5" 200 Watt 2-Way** *Ceiling / Wall Speakers (Pair)*

Specifications:

- In-Wall / In-Ceiling System
- 2-Way Stereo Sound Speakers
- Includes (2) 6.5-inch Speakers
- 1/2" High Compliance Polymer Tweeter
- Polypropylene Cone with Rubber Edge
- Mounts Flush on Walls or Ceilings
- Environmentally Friendly ABS Construction
- Perfect for Custom Installations & Applications
- Includes Round Stain Resistant Grills
- Cut-Out Template for Easy Installation


Technical Specs:

- 200 Watt Rated Peak Power
- Frequency Response: 70Hz-20kHz
- Impedance: 16 Ohms
- Sensitivity: 88 dB
- Total Unit Dimensions (Diameter x Depth): 9.0" x 3.1"
- Cutout Diameter: 7.6", Cutout Mounting Depth: 2.8"


1600-63rd Street
Brooklyn, NY 11204 USA

EXISTING CONSTRUCTION


IN-CEILING SPEAKERS

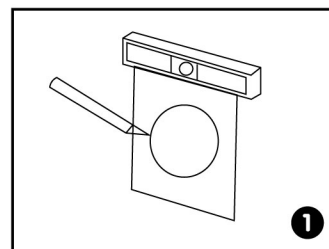


Cut the drywall.

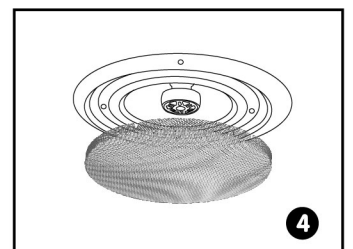


Replace the metal grille.

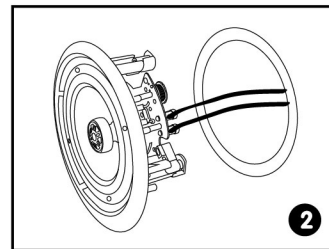

Connect the speaker wires to the speaker.

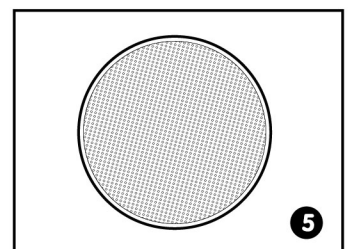

Complete.

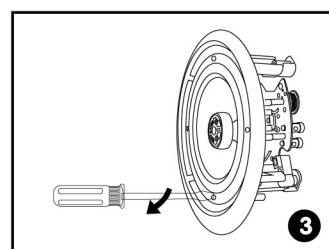

Screw down each of the four Phillips head screws. The locking tabs will swivel into place and secure the unit to the rear surface of the drywall. Put in the strips of adhesive to secure the grille.