




Instruction Manual & Parts Catalog

Trailer Spare Tire Carrier

Model 70214

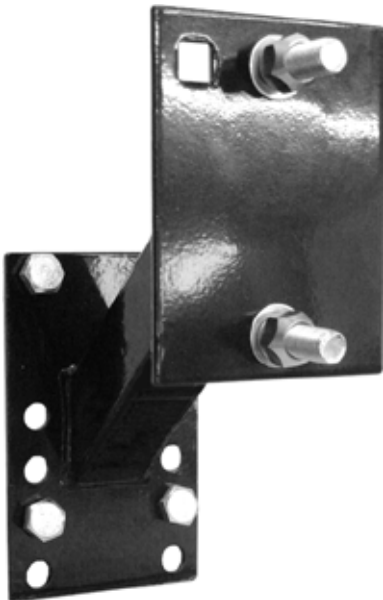

Read and understand this entire manual before assembling, installing, operating, or servicing this product.

SAVE THIS MANUAL

Copyright© 2012 by Maxx Group, LLC All rights reserved. No portion of this manual or any artwork contained herein may be reproduced in any shape or form without the express written consent of Maxx Group, LLC. Due to continuing improvements, actual product may differ slightly from the product described herein. Tools required for assembly and maintenance may not be included.

IMPORTANT SAFETY INFORMATION

This is a **SAFETY ALERT** symbol.



It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.



DANGER indicates a hazardous situation which, if not avoided, will result in death or injury.



WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.



CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.



NOTICE indicates important information which, if not followed, may cause damage to equipment.

SAVE THIS MANUAL

Keep this manual for the safety warnings and precautions. The manual offers important information on how to assemble, use and maintain this product.

Write the product's model number and purchase date on the cover page of this manual.

Keep this manual (and your purchase receipt) in a safe place.

UNPACKING

The shipment should be thoroughly inspected as soon as it is received. The signed "bill of lading" is acknowledgement by the carrier of receipt in good condition or shipment covered by our invoice. For your own protection, if any of the goods called for on the bill of lading are shorted or damaged, do not accept them until the carrier makes a notation on the freight bill of the shorted or damaged goods.

Notify Maxx Group, LLC immediately if any hidden loss or damage is discovered after receipt.

Definition of Symbols



WARNING concerning Risk of Eye Injury. Wear ANSI approved eye protection.



WARNING concerning Risk of Hearing Loss. Wear hearing protection.



IMPORTANT SAFETY INSTRUCTIONS



1. **Read and understand all safety warnings and instructions.** Failure to follow the warnings and instructions may result in serious injury or death. Save all warnings and instructions for future reference.

2. Personal and Work Area Safety



A. **Always wear ANSI approved safety goggles.**



B. **Always wear hearing protection when working in noisy environments.** Prolonged exposure to high intensity noise can cause hearing loss.



C. **Use safety equipment.** Safety shoes, hard hat and work gloves must be used for applicable conditions.

D. **Dress appropriately.** Never wear loose fitting clothing or jewelry when working. Contain long hair, and keep hair, clothing and gloves away from moving parts.

E. **Use common sense when working.** Stay alert and concentrate when assembling and using the Trailer Spare Tire Carrier. Never work while under the influence of alcohol, drugs or medications.

Personal and Work Area Safety (continued)

F. While assembling and using the Trailer Spare Tire Carrier keep work area clean and well lighted. Keep spectators and children out of the work area.

3. Use of the Trailer Spare Tire Carrier

A.  **WARNING** Do not exceed the Spare Tire Carrier's 100 Lbs. maximum weight capacity.

B. Chock wheels of trailer during the installation of this Spare Tire Carrier. Make sure trailer is on a flat, level, solid surface.

C. **Be aware of the danger of “dynamic loading”**. This situation arises when a load is dropped onto the Spare Tire Carrier, resulting in a short term excessive load. Dynamic loading can result in damage and failure of the Spare Tire Carrier and/or trailer, and personal injury to people in the area.

D. Periodically check the mounted Spare Tire Carrier to make sure all hardware is tightly secured. Check for damaged or worn parts; never use a damaged Spare Tire Carrier. Check that the hardware securing tire to Carrier is in good condition and secure.

E. Identify recommended trailer spare tire mounting points; read trailer manufacturer's manual for recommendations and safety warnings. Spare Tire Carrier and spare tire location cannot interfere with normal operation of the trailer. Carrier location cannot interfere with visibility of trailer lights or license plate.

F. It is the responsibility of trailer's owner to make sure the use of this product conforms with all D.O.T., and state rules and regulations.


ously discussed cannot cover all possible events and circumstances. It is important that the person installing and using this product use common sense at all times.

Maxx Group, LLC is not responsible for the attachment or the installation of this product. The attachment of this product is critical and beyond the control of Maxx Group, LLC. It neither guarantees, nor will it be liable for any damage resulting from its attachment or improper use.

Limited Warranty. Maxx Group, LLC warrants to the original retail purchaser that the product is free of defects in material and workmanship at the time of shipment. This product is warranted for 90 days from the date of purchase. This warranty is expressly in lieu of all other warranties, express or implied. Proof of purchase is required for warranty transactions; a copy of the original invoice or sales receipt is required.

Keep in mind that the warnings previ-

Assembling and Setting Up the Trailer Spare Tire Carrier

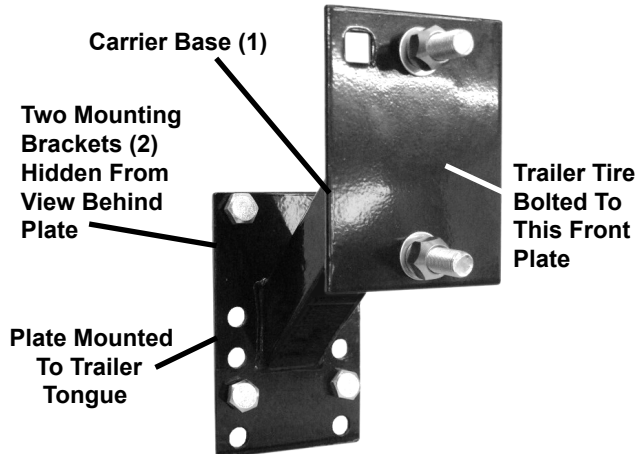

1. Refer to photo above and to the Assembly Diagram at end of this manual.

2. The Trailer Spare Tire Carrier will be placed on the side of the trailer tongue. Select the desired location based on the instructions and warnings on page 3 of this manual.

Note: The Tire Carrier should be mounted so that the front plate (which will hold the tire) is positioned higher than the plate which will be attached to the trailer's tongue (see Assembly Diagram).

3. Make sure the empty trailer has all tires chocked, and is located on a flat, level, solid surface. Raise the trailer tongue and support the tongue in two places (on each side of tongue).

4. Position the Carrier Base (1) on the outside of trailer tongue; the two Mounting Brackets (2) will be on the other side of trailer tongue. The Mounting Brackets will be secured to Carrier Base using the four Hex Bolts (5), Washers (6), Spring Lock Washers (7) and Nuts (8) - see Assembly Diagram. Tighten Nuts to 40 ft.lbs.

Warning: Choose the closest mounting holes on Mounting Brackets and Carrier Base Plate against trailer tongue if the height of your trailer tongue is less 5", instead of using the farthest mounting holes.

5. The trailer spare tire will be mounted on the Front Plate. It is recommended that a helper assist in lifting and positioning the spare tire. **Make sure the tire's rim is centered on the Front Plate before mounted. Note the three hole positions on the Front Plate (see Assembly Diagram).** The trailer tire will be mounted with two Round Head Bolts (3). **One of the Bolts will be inserted in one of the two uppermost holes (depending on whether rim has 4 or 5 lug holes). The other Bolt will be inserted in the hole in lower portion of the Front Plate.** Secure both Bolts using Nuts (4) torqued to 40 ft.Lbs.


6. Periodically check the Trailer Spare Tire Carrier. Check that Bolts are tight and check that there are no cracks or damaged parts.

SPECIFICATIONS

Maximum Weight Capacity	100 Lbs.
Application	Bolts onto trailer frame with maximum tongue dimensions of 3" x 5"
Finish	Powder Coated

Parts List

Part #	Description	Qty
1	Carrier Base	1
2	Mounting Bracket	2
3	Bolt (Round Head) 1/2" x 1 3/4"	2
4	Nut	2
5	Bolt (Hex) 7/16" x 4 1/2"	4
6	Washer	6
7	Spring Lock Washer	6
8	Nut	4

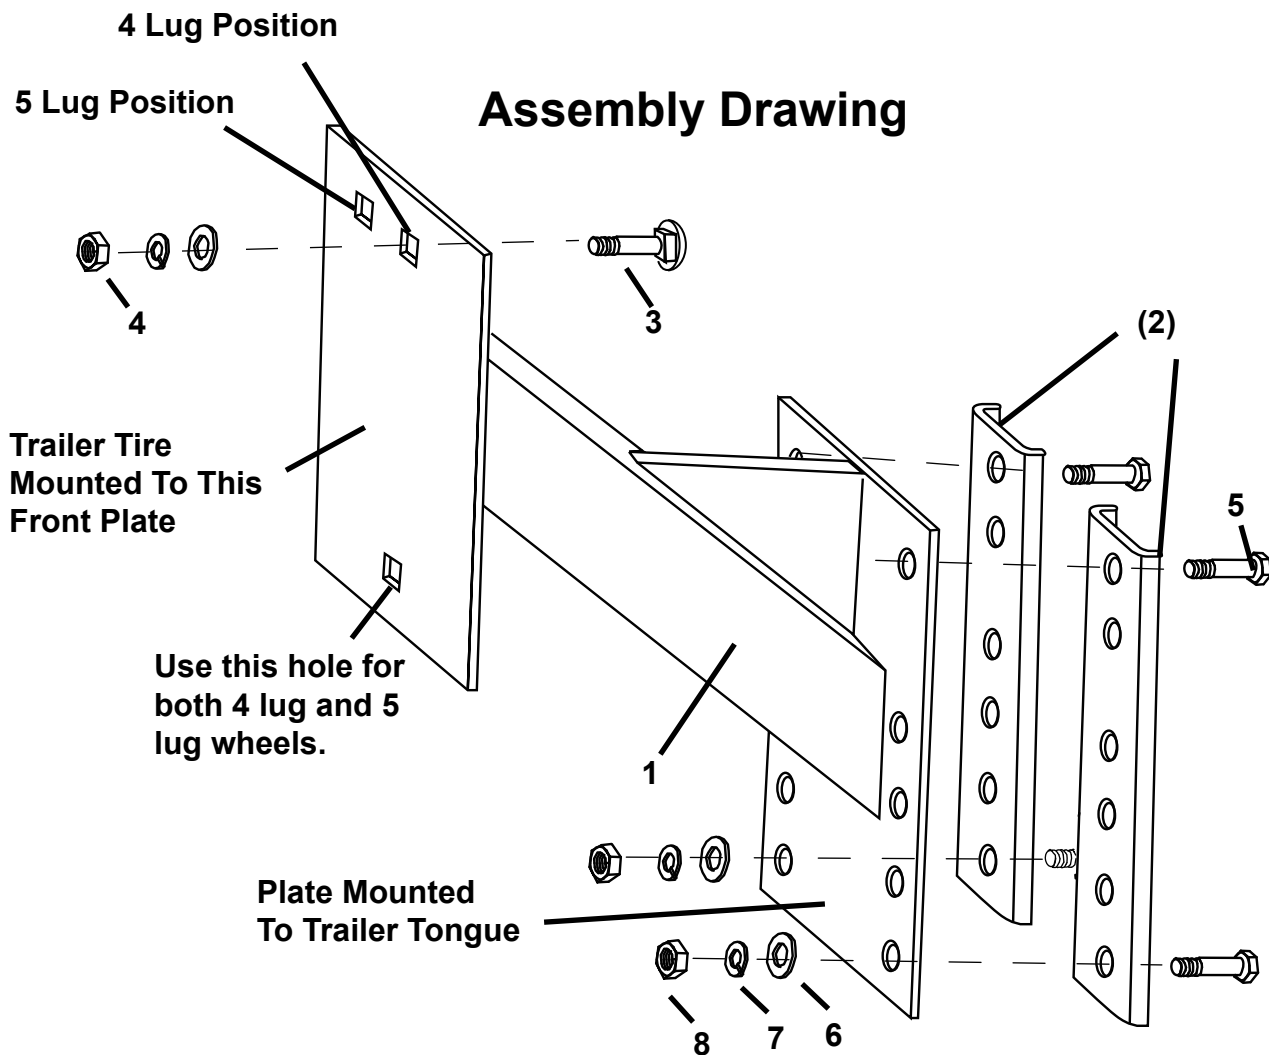

Note: The Parts List and Assembly Diagram is provided as a reference tool only. Some parts are listed and shown for illustration purposes only, and are not available as replacement parts. All repairs to this tool (including replacing parts) should only be done by a qualified service technician.