




- 1 Front basket
- 2 Rear basket
- 3 Bracket saddle
- 4 Bracket top plate
- 5 Knobs
- 6 Washers
- 7 U bolts
- 8 Machine screws
- 9 Wrench

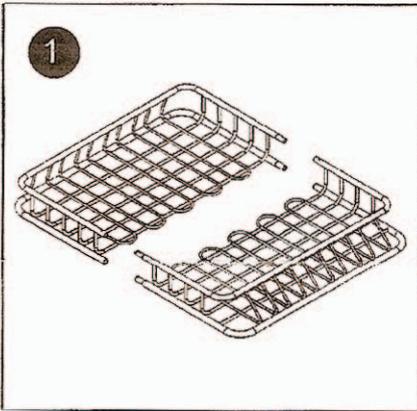

1 First slide front and rear basket together then secure it with machine screws (8). Then lay the basket on the roof bars.

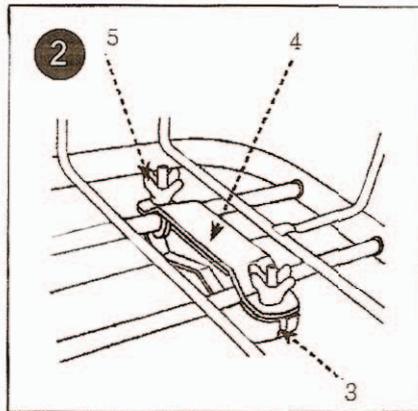

2 Now snap the saddle (3) into basket. The saddle must sit on the cross bar then secure it with bracket top plate (4), knobs (5), washers (6) and U bolts (7).

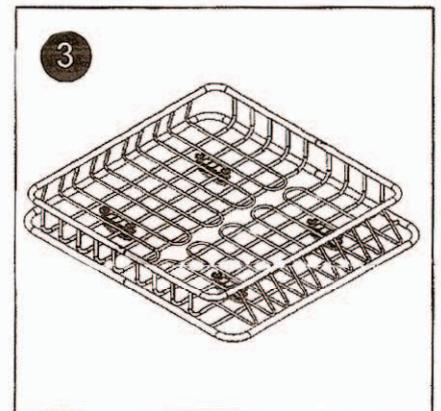

3 Always position the saddles away from the center for maximum support

**CAUTION**

- 1.1 The roof basket has been designed and manufactured to attach securely to a variety of vehicles with rails on the roof. The attachment of this roof cross bar to a vehicle is beyond the control of the manufacturer. The user must therefore ensure that the roof basket is suitable for use with their particular cross bars and that any items are securely and safely attached to the roof basket.
- 1.2 During the journey, please check the attachment of roof basket to cross bar constantly and cautiously. Retighten the knobs if necessary. Make sure all the parts are in good condition. Contact authorized dealer if any part needs attention.
- 1.3 Always obey the national law about the roof basket.
- 1.4 The maximum load for this roof basket is 150 lbs. Do not over load! The minimum distance between two cross bars is 40 cm (15 in).
- 1.5 Reduce the speed on rough road.
- 1.6 This roof basket is designed for temporary use only, remove when not in use or during the bad weather.
- 1.7 Failure to obey the guideline in the instruction will void the warranty.