

Travlog Car Roof Bag

User Manual



Thank you for choosing Travlog car roof bag, our products are designed to meet the highest standards of quality, we hope that Travlog can increase your ease and enjoyment on the journey.


Warranty of 12 Months: If this product defected within 12 months Travlog will either repair or replace it without charge.

After Sale Service
Email: Support@ontravlog.com

20 Cubic Feet

Material: 840D mesh material, with double-sided PVC coating

Size: 47.24 * 39.37 * 17.71in(120 * 100 * 45cm)

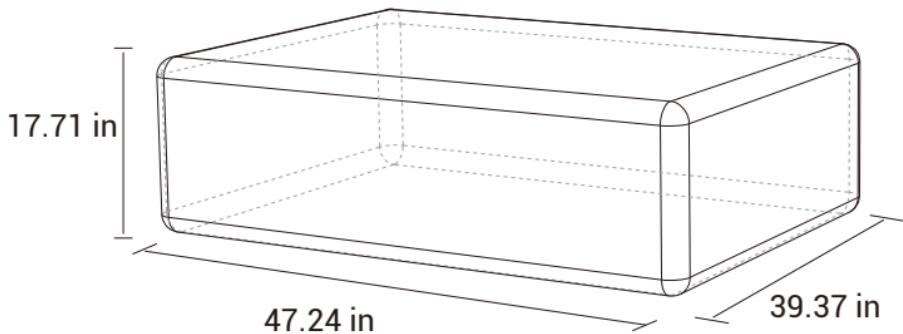

Package Included:



1 x Roof Bag



1 x Storage Bag



1 x Anti-Slip Mat



1x User Manual



1*3.5m Fixed Strap



4 x Tough Door Hook

Please Note:

1. When you have a long journey, you can tie the 3.5-meter fixed strap to the middle of the roof bag to prevent luggage from moving up and down inside the bag
2. Please zip up and tighten the fixing straps after packing to create a secure attachment and avoid movement during travel.
3. Since this product is soft shell, don't put sharp things in it.
4. Don't load goods that exceed the height of the product and put them in order.
5. Keep the side which without zipper towards the FRONT of the vehicle.
6. Recommend airing it out outside of your house as there may be a smell of rubber when first opened.
7. To keep the inside of the bag dry, please place both zippers on side instead of keep them back and front.
8. Always remember to attach the velcro.

WARM TIPS



Zipper closed



Velcro attached



Straps tied tightly



Zipper opened




Velcro loose



One strap is tighter than the other

With Roof Rack Installation Steps



1. Place the anti-slip mat on the center of car roof top before putting the bag on.



2. Zip up and put on the flap after loading the luggage.



3. Run the buckle through the rack.



4. Plug the buckle and tighten the reinforcing strap.



5. Plug the buckle and tighten the fixing strap.

Without Roof Rack Installation Steps



1. Pull back the weather stripping seal.



2. Plug the door hook on the metal door frame.



3. Pop the weather stripping seal back.



4. Run the buckle through the door hook.



5. Plug the buckle and tighten the fixing strap.

How To Use Password Lock

1. The initial password is "000"
2. How to change the password: 1. After opening the lock turn the lock column 90° and press it down
3. Keep the lock column pressed rotate the number you need to the scale line
4. Loosen the lock beam, and lock the password lock again



**Note: Please do not change the password frequently;
if you forget the password you set,
the password lock will not be able to open**