MANUAL




For Honda Accord 2008-2013 / C7246

Central Control Disassembly and Operation
Post-installation rendering


TOOLS REQUIRED FOR DISASSEMBLY

1.Wires 2.Frame Accessories
3.Installation Tools

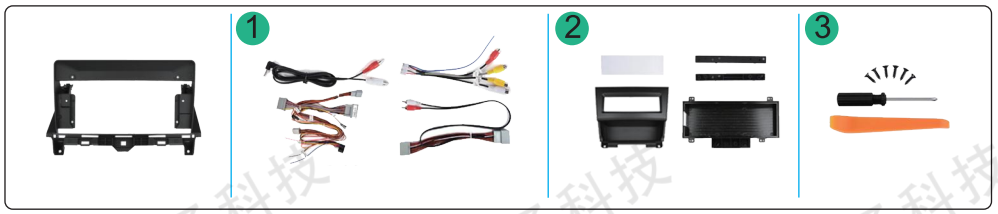

Disassembly:

1. Use a pry bar to lever open the frame below the gear lever, and unscrew the connected wires.

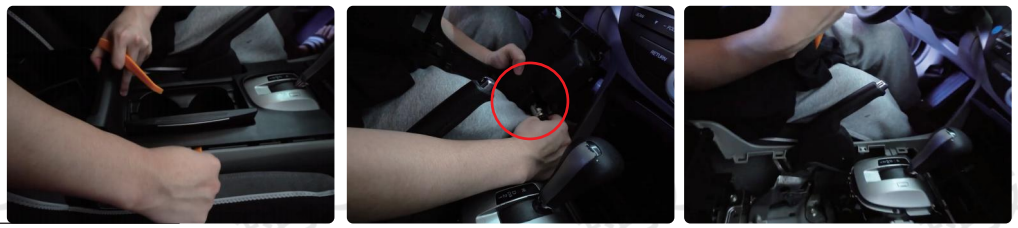

2. Use a screwdriver to unscrew the 4 screws that secure the storage box, remove it and then unscrew the 2 screws beneath the air conditioning control panel.



3. Pry open side strips on central control, unscrew screws on both sides of the air conditioning panel, remove the control panel, and unplug corresponding wires.



4. Use a screwdriver to unscrew the frame of the display screen and remove it, then unscrew the 4 screws securing the display screen, take out the screen, and unplug the connecting wires.



PROPOSE

Before starting the replacement job, you should prepare tools such as a plastic pry tool and a screwdriver, and make sure the car's power is cut off during the installation.

Installation

(If the wiring harness does not match, please contact customer service to request the correct wiring harness)


1. Tear off the protective film on the surface of the transparent screen, and affix the screen in the position above the new storage box, as shown in the diagram.




2. Unscrew the 4 screws on the back of the original car display screen, then install the screen above the new storage box and tighten the screws.




3. Plug the original car display screen cables into the extension cables and connect them to the air conditioning control panel socket. Then, connect the cables of new radio to the original car cables and fasten the radio.

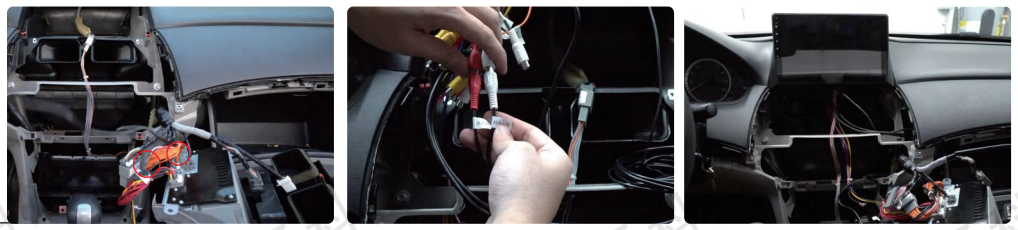

4. Install the air conditioning control panel back into the original car,tighten and secure the screws on both sides, and then reinstall the side strips on both sides of the central control.

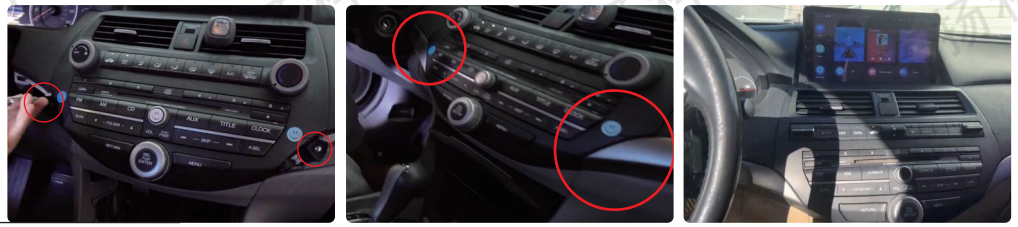

5. Tighten the screws under the air conditioning control panel, attach the new storage box below it, reassemble the frame under the gear lever, and secure the connecting wires—your new radio is now installed.

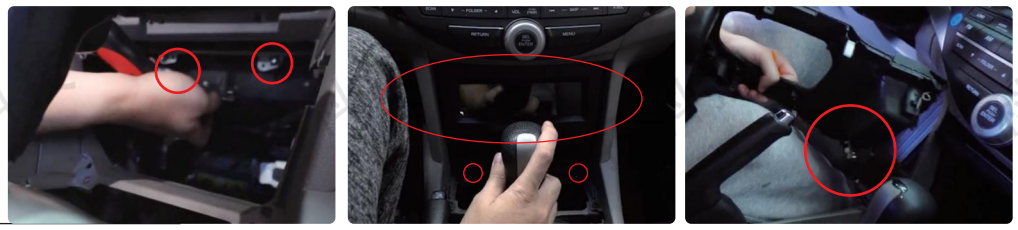

COMPARATION

Effect of Installation



GENTLE REMINDERS

Due to the complexity of the product structure, you may encounter some problems during installation. If you still have any questions about the installation after reading this manual, you can contact usand we will respond to you within 24 hours. Don't worry; we will do our best to solve the problem for you until you are satisfied.

After-sales email:cheyang728@gmail.com

WARN FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation