

Universal Car Seat Cover USER GUIDE

This user guide consists of 5 parts: installation steps, important notes for a perfect installation, an installation video, maintenance instructions, and warranty information. Please save this user guide for future reference.

The installation steps provide clear, step-by-step instructions to properly install the car seat cover. The important notes section highlights key considerations to ensure a perfect fit and lasting use. An installation video is also included to visually demonstrate the process.

Additionally, the guide covers maintenance recommendations to keep the car seat cover looking its best. Finally, the warranty information outlines the coverage and terms to give you peace of mind.

We encourage you to thoroughly review this entire user guide before installing your new car seat cover. Proper installation and care will maximize the product's longevity and performance. Please let us know if you have any questions - we're here to help!

Part One: Installation Steps

STEP ONE: PREPARE


Prior to commencing installation, please confirm that the following components and accessories are present:

Seat Cover Components:

- ✓ 2 Front Headrest Covers
- ✓ 2 Front Seat Back Covers
- ✓ 2 Front Seat Cushion Covers
- ✓ 3 Rear Seat Back Covers
- ✓ 3 Rear Seat Cushion Covers
- ✓ 1 Rear Seat Headrest Pad

Installation Accessories:

- ✓ 8 Clips
- ✓ 18 Plastic Anchors
- ✓ Instruction Manual

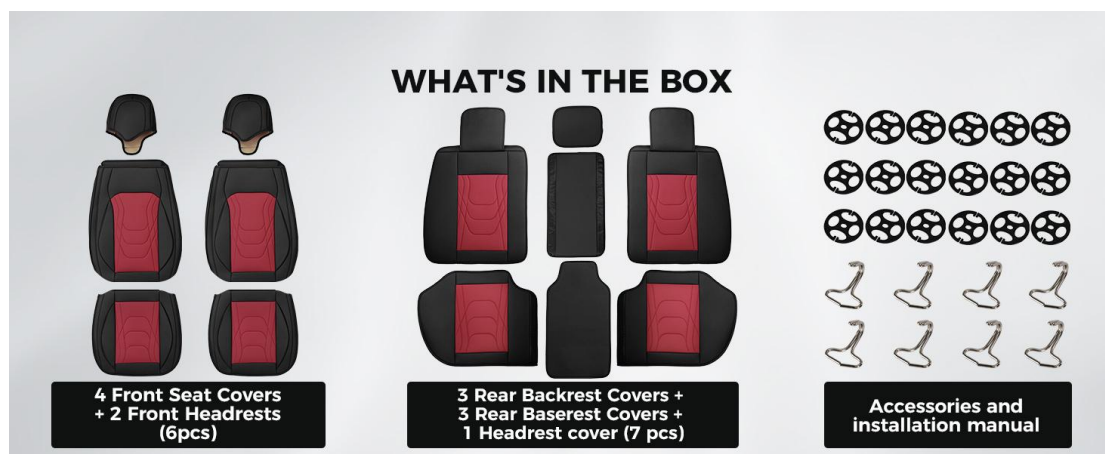


STEP TWO:INSTALLING FRONT SEAT

1. Install the plastic anchor and clips at the locations shown in the diagram. The plastic anchor and clips can be installed either before or after attaching the seat cover to the seat.

Front Seat:

Tips: For the rubber bands on the seat backrest, wrap them around the anchors one additional time to secure the cushion.

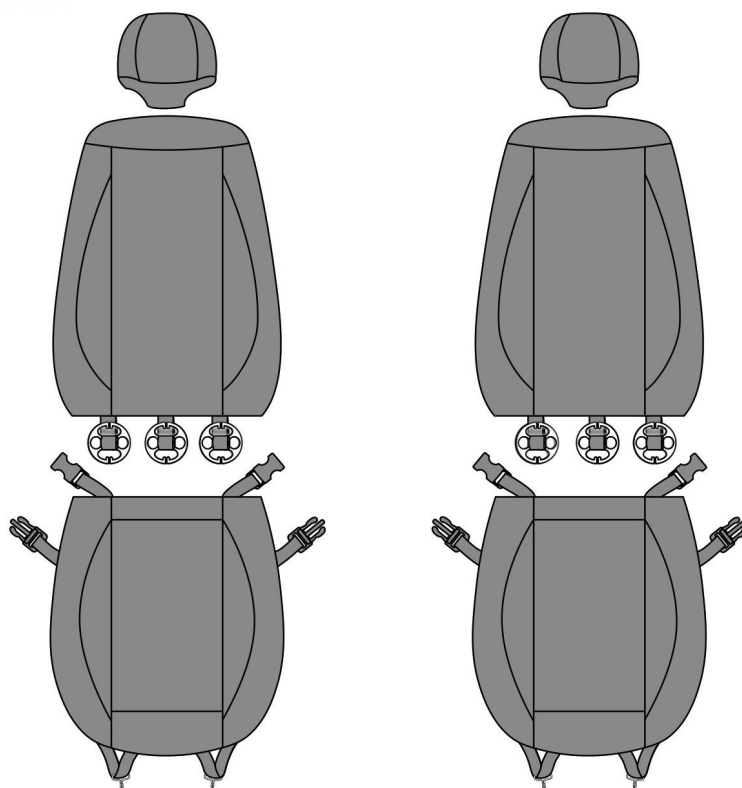


Rear Seat

For installations without removing the rear seat bottom, attach the rubber bands to the plastic anchors as follows:


Wrap the rubber bands on the seat bottom multiple times around the plastic anchors.

If your installation does not match this scenario, refer to the appropriate installation instructions.

Rear Seat

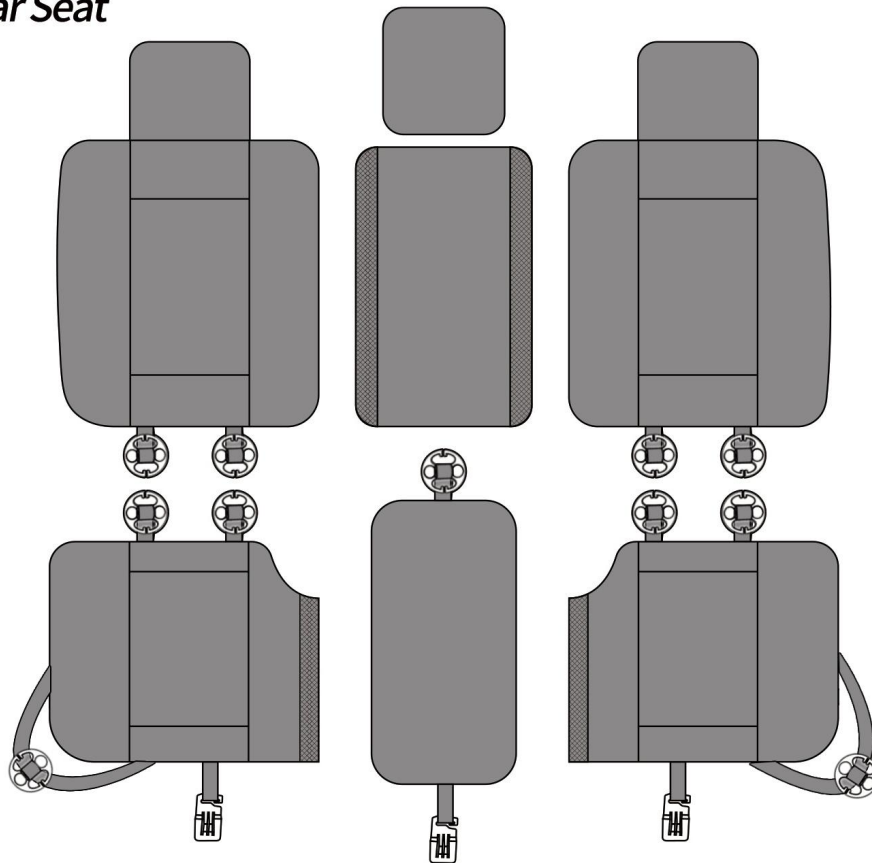


Plastic Anchor Installation: See diagram below.

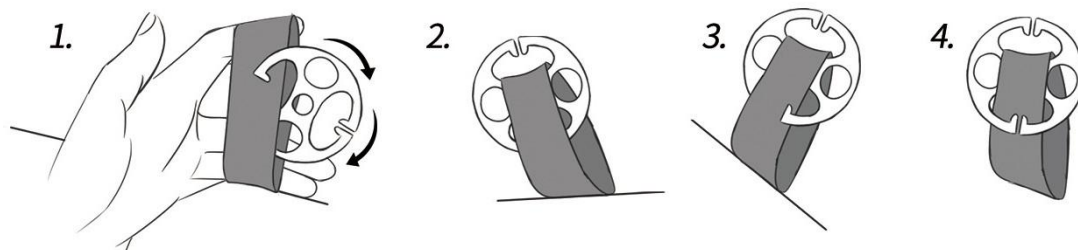


Clip Installation: See diagram below.


An alternative method is shown in the installation video; either method may be used.

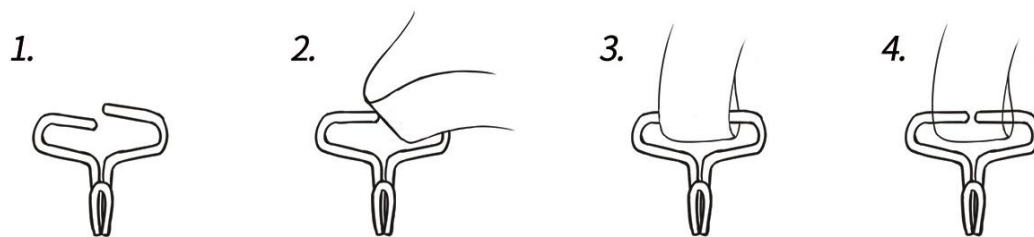



2.Installing the Seat Back Cover

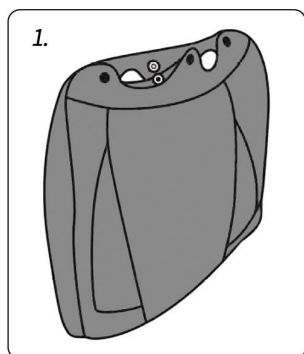

1. Unfasten the top fasteners (buckles or zipper).

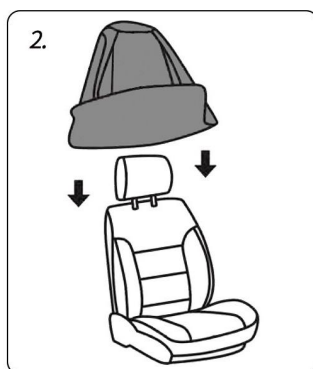


2. Slide the cushion in from the top down into the seat.

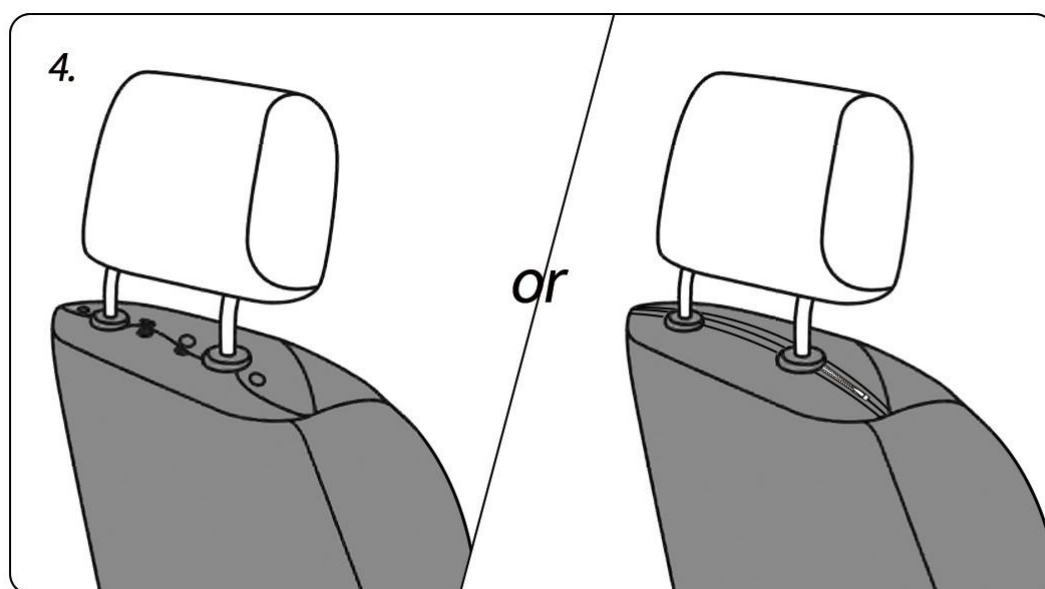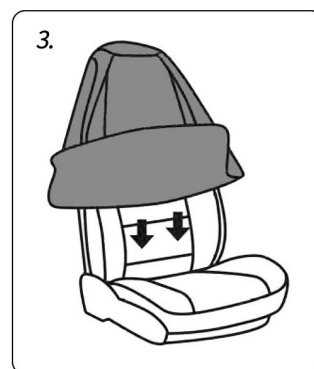

4. Reattach the fasteners (or zip up) that were previously opened.




Tuck the plastic anchor into the seam of the seat.

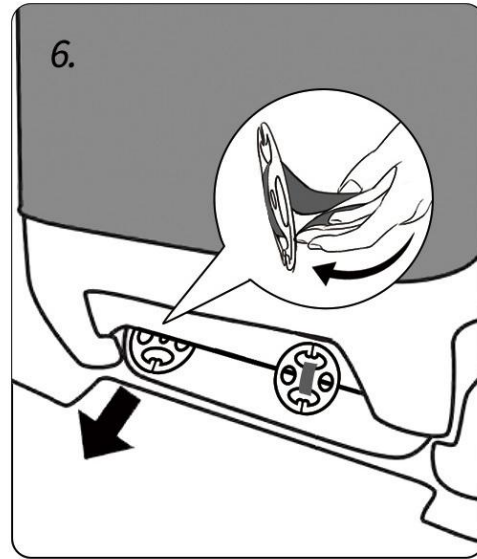


From the back of the seat, pull the plastic anchor out and stand it upright, ensuring it does not fall out.


2. Attach the Headrest Cover

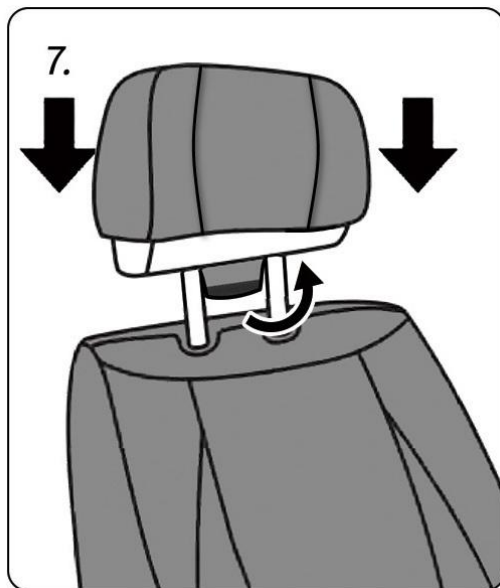



Install the headrest cover, tucking the hook-and-loop fastener from back to front.

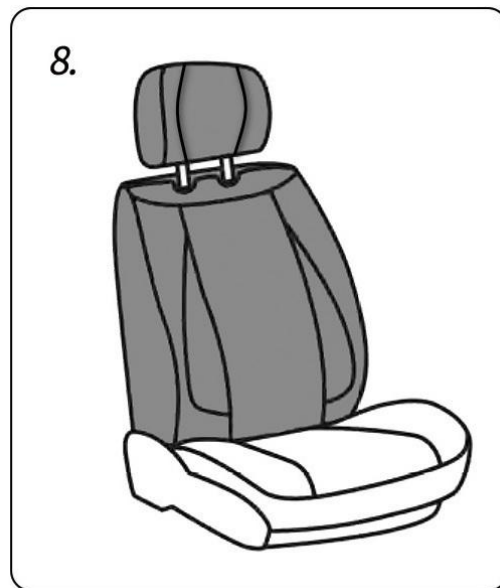


3. Installing the Bottom Cushion Cover

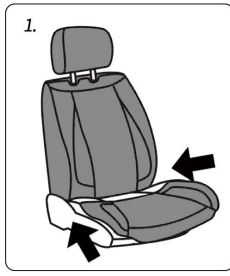


Slide the cushion into the seat.

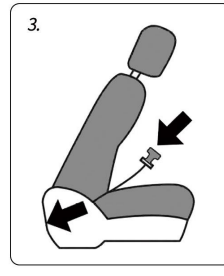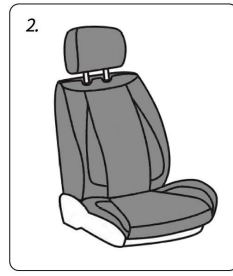


Thread one end of the clip from the side to the back

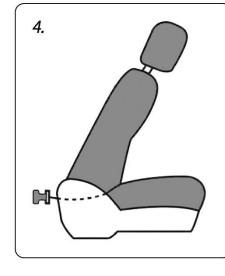


Tuck the other end through the seat seam to the rear.

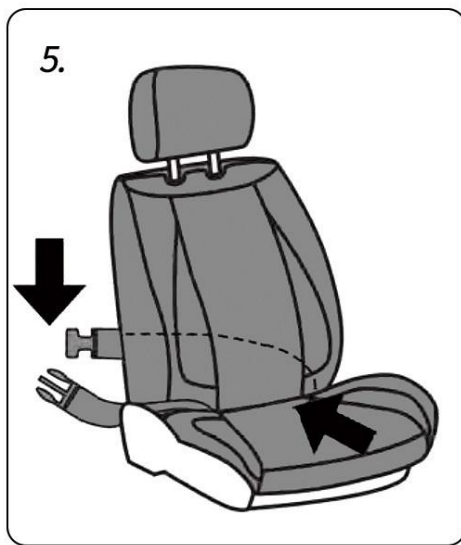


Route one end of the clip along the seat side; thread the other end through the seat seam.

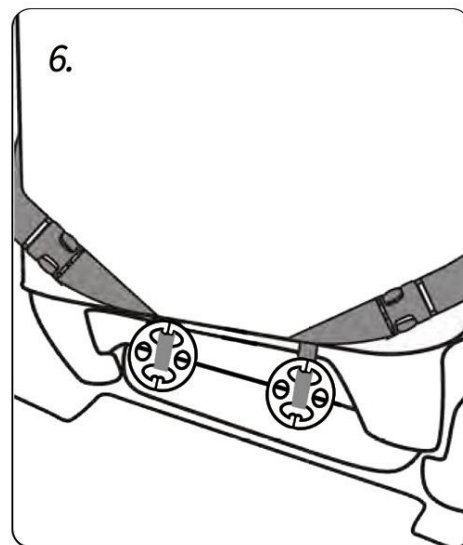

Attach both ends of the clip to the side of the seat.

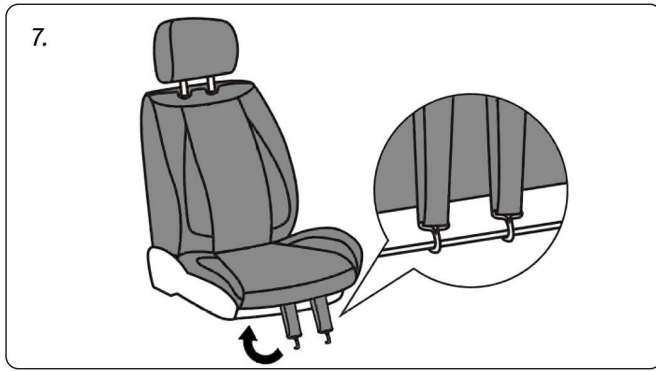




Hook the cushion's clips onto any secure point on the underside of the seat.

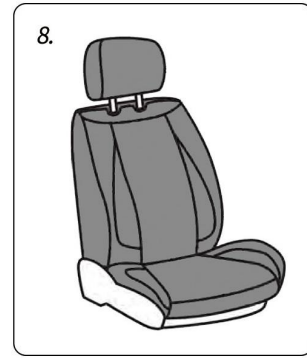

Installation Complete.

STEP THREE: INSTALLING REAR SEAT CUSHION COVER


This installation method is for vehicles with a solid seat base. Vehicles with gaps under the seat require a different installation method.

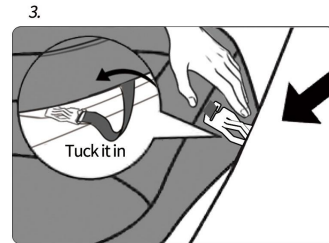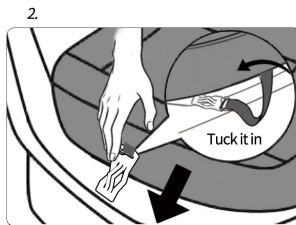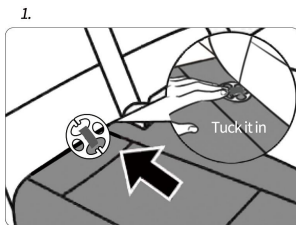

Side Cushions on the seat. Insert the plastic anchors into the seam between the seat and backrest.


Insert the fasteners into the seam under the seat.

4.

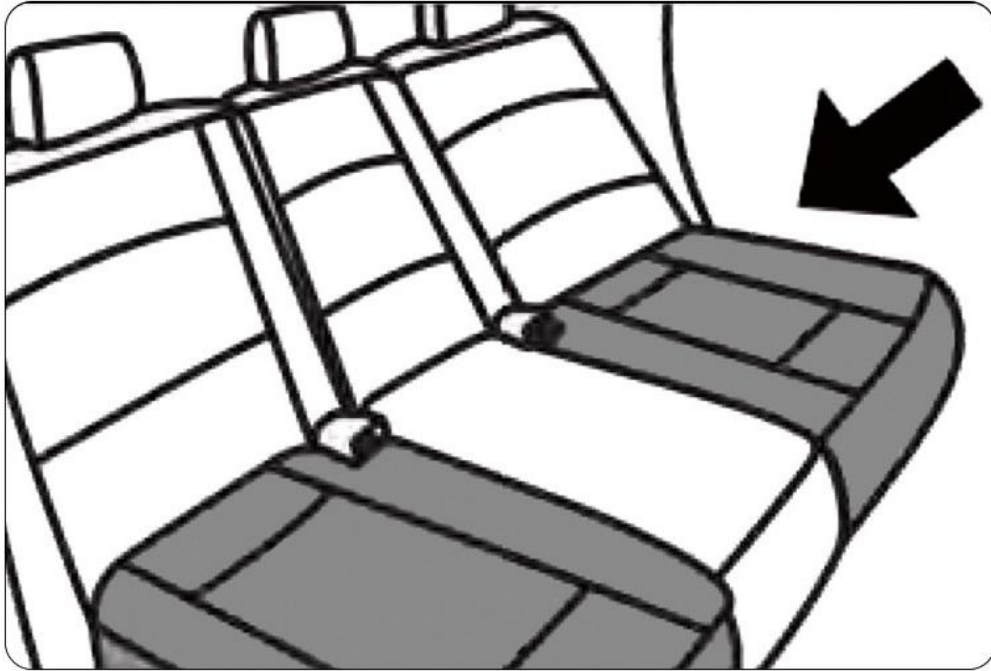

Follow the same steps for the opposite side.

5.

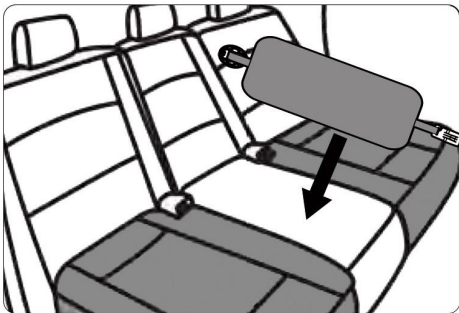


Position the center cushion piece.
Attach the hook-and-loop fasteners to
the sides.

6.




Insert the plastic anchors into the seat
seam.
Insert the fasteners under the seat.


STEP Four: INSTALLING REAR SEAT BACK COVER

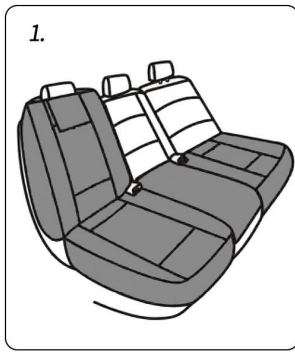


1.
Install the seat back cover.
Secure the elastic straps around the headrests.

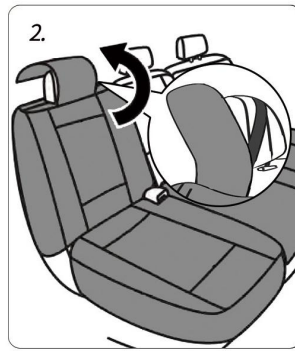


2.
Attach the headrest cover to the headrests, securing the clips.

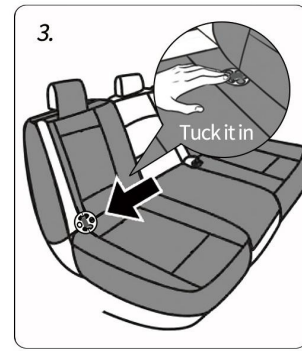

3.
Tuck the plastic anchors into the seat seams.

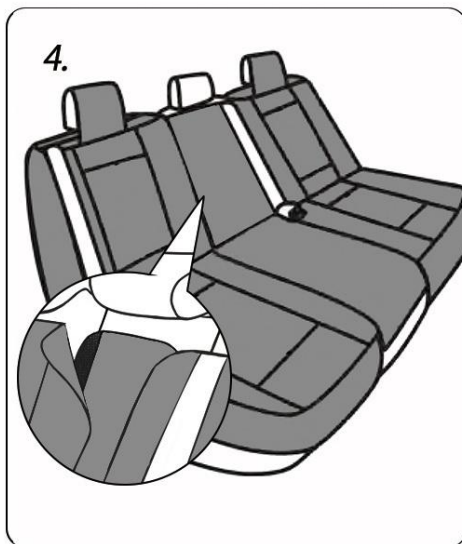


4.
After installing the side seat back covers, position the center cover and secure it with hook-and-loop fasteners.

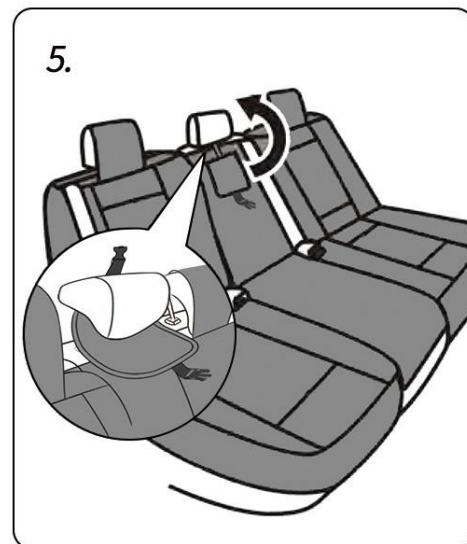

5.
Cover the headrest with the center headrest cover and secure the clips.

6.

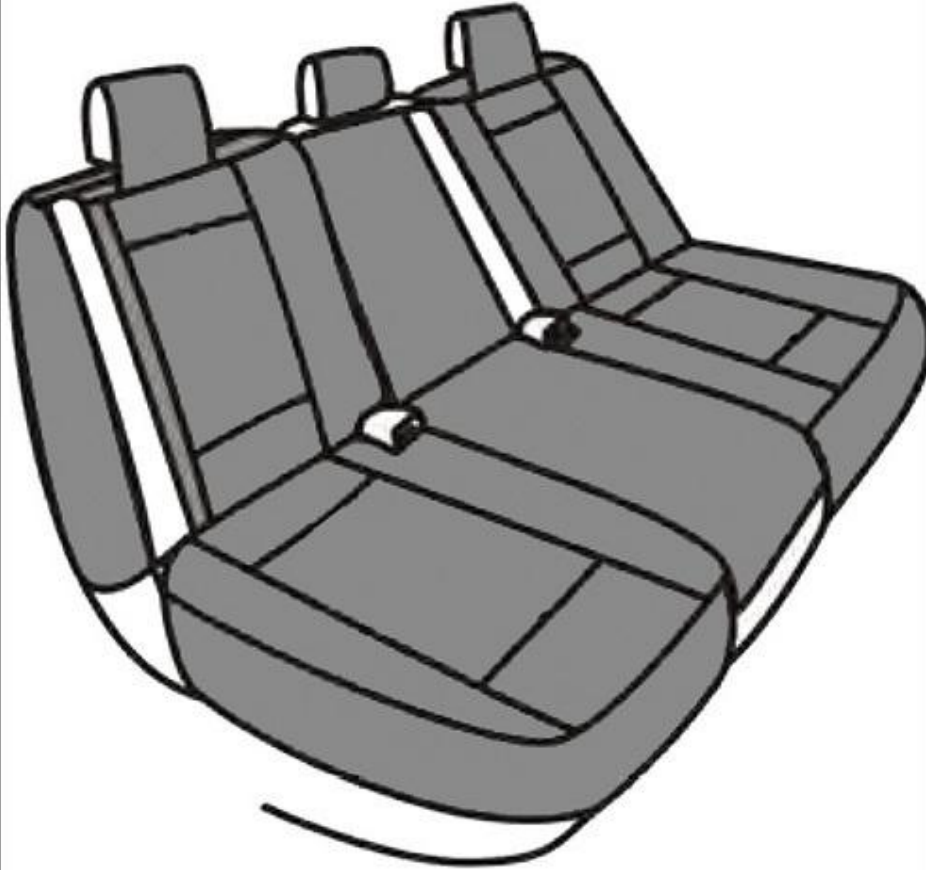

Installation complete.

Part Two: Important Notes

1. This manual applies only to the illustrated product. For other products, please refer to their respective instructions.
2. The seat cover is designed for specific front, back, left, and right positions. Please ensure correct placement. Instructions for identifying these positions are provided below.

2.1 Headrest Cover

Look for the two decorative stitching lines to identify the front of the headrest covers.



Front View



Rear View

The front of the headrest covers has decorative stitching lines. The reverse side lacks this detail.

2.2 Front Seat Back Cover

Correct front seat cover installation is crucial for airbag deployment.

Locate the airbag label or opening on the seat cover. This marking indicates where the airbag will deploy.

Ensure that the side with the airbag label or opening is facing the vehicle door.



Airbag Openings



Airbag Markings and Labels

2.3 Front Seat Cushion Cover

The front seat cushion cover is universally designed to fit either side; it is not side-specific.

2.4 Rear Seat Back Cover

The complete rear seat back cover consists of three pieces. The left and right pieces are differentiated by their edges: the curved edge faces outward, and the straight edge faces inward.



2.5 Rear Seat Cushion Cover

The rear seat cushion cover consists of three pieces. The left and right cushions can be distinguished by their edges: the curved edge should be positioned on the outside, while the straight edge should face inward.

2.6 Middle Pad

To identify the back and bottom portions of the center rear seat cushion, look for hook-and-loop fasteners (velcro). The backrest piece has fasteners on both sides; the bottom piece does not.



While products differ, identification is the same.

3. After installation, verify that the seat cover does not interfere with the proper function of the seatbelt.
4. Make sure all straps or fasteners are securely attached to prevent movement while driving.
5. Adjust the seat cover to align properly with the seat and backrest for optimal comfort.

Part Three: Installation Video

Scan the code below with your camera or a QR reader app to access our comprehensive installation video playlist. This playlist covers step-by-step guides for installing FREESOO universal seat covers on all car seat types. Learn the perfect installation process for your vehicle's seating configuration.



Alternatively, you can search for "FREESOO Ultimate Universal Car Seat Cover Installation" on YT to watch the videos. This will provide step-by-step instructions to ensure proper installation and comfort.

Part Four: Removing Wrinkles

To remove wrinkles in the seat cover, you can try applying a damp cloth or sponge and gently steaming the area. Alternatively, use a handheld garment steamer or a warm blow dryer to smooth out the wrinkles. Take care not to overheat the material and damage the seat cover.

Part Five: Maintenance

To keep your seat covers looking and feeling their best, follow these simple care instructions:

- **Regular Cleaning:** Regularly wipe down your seat covers with a damp (not soaking wet) cloth to remove dirt, dust, and crumbs. This prevents dirt from embedding itself and causing more significant stains. Avoid harsh chemicals or abrasive cleaners.
- **Immediate Stain Treatment:** Address spills and stains *immediately*. The longer a stain sits, the harder it will be to remove. Blot (don't rub!) the stain with a clean cloth.
- **Spot Cleaning:** For tougher stains, gently blot (don't rub!) with a mild detergent solution and a clean cloth. Rinse thoroughly with a damp cloth and allow to air dry completely. Test any cleaning solution in an inconspicuous area first.
- **Avoid Harsh Chemicals:** Never use harsh chemicals, bleach, or abrasive cleaners. These can damage the material and cause fading or discoloration.
- **Air Dry Only:** Always air dry your seat covers. Do not put them in a washing machine or dryer. Direct heat can cause shrinkage, warping, or damage.
- **Protect from Sun Exposure:** Prolonged exposure to direct sunlight can fade and damage the color of your seat covers. Park in shaded areas whenever possible.

- **Regular Inspection:** Regularly inspect your seat covers for any signs of wear and tear, such as rips, tears, or loose stitching. Address these issues promptly to prevent further damage.

Part Six: Warranty

At FREESOO, we stand by the quality of our products. We offer a 30-day return policy for items that have quality issues. If you encounter any defects in materials or workmanship within this period, you can return the product for a full refund or exchange.

Please note that personalized or custom items may not be eligible for return unless there is a manufacturing defect.

Before making your purchase, please ensure that you check the compatibility of the car seat cover with your vehicle model. This step is crucial for a perfect fit and optimal performance. If you have any questions regarding compatibility, feel free to reach out to our customer service team for assistance. Your satisfaction is our priority!