



Filling the Clean Water Tank


BISSELL®
BigGreen Commercial®




1. Remove the Dirty Water Tank. Pull handle to upright position and lift up to remove.




2. Lift Clean Water Tank from the base of machine.




3. Remove cap. Fill tank to FILL line with hot tap water. Do not boil or microwave water.



4. Use the cap on tank to measure BISSELL formula. Use two capfuls of formula for a full tank.




5. Replace the Clean Water Tank and Dirty Water Tank.




6. Push the Dirty Water Tank handle back to lock into place.

Carpet Cleaning Tips


- Before your first use, remove the cardboard cut out from the foot.
- Move furniture to another area if cleaning the entire room. (Optional)
- Vacuum area with a dry vacuum cleaner thoroughly before deep cleaning.
- Plan your cleaning route to leave an exit path. It is best to begin in the corner farthest from your exit.
- Pretreating is recommended to improve cleaning for heavily soiled carpet in high-traffic areas.
- Your machine has a circuit breaker that automatically shuts off the brush if a large or loose object gets caught in it. If that happens, unplug your machine, remove the object and plug machine in to reset the circuit breaker.
- You may notice hair and debris deposits on the carpet or in the tank that were loosened while cleaning (especially with newer carpets that have never been deep cleaned before). This debris should be picked up and thrown away.




1. Plug into a proper outlet.



2. Turn the Power Switch to the ON (I) position.



3. Recline handle by pushing down on the green lever on the back of the machine while pulling back on handle.

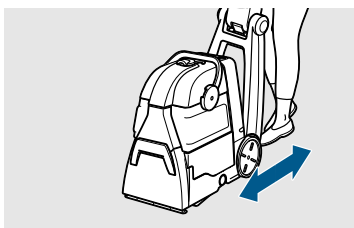

4. Make cleaning passes. Repeat these passes until solution being pulled up appears clean.

- 1.** Hold Spray Trigger
- 1 pass forward
 - 1 pass back

- 2.** Release Spray Trigger
- 1 pass forward
 - 1 pass back


⚠ WARNING To reduce the risk of injury, use extra care when cleaning on stairs. Keep machine on a level surface.

NOTICE Do not overwet. Take care not to run over loose objects or edges of area rugs. Stalling brush may result in premature belt failure. Some Berber carpets have a tendency to fuzz with wear. Repeated strokes in the same area with an ordinary vacuum or deep cleaner may aggravate this condition.


Upholstery Cleaning Tips

If using to clean upholstery, check upholstery tags.


- Check manufacturer's tag before cleaning. "W" or "WS" on the tag means you can use your deep cleaning machine. If the tag is coded with an "X" or an "S" (with a diagonal stripe through it) or says "Dry Clean Only", do not proceed with any deep cleaning machine. Do not use on velvet or silk. If manufacturer's tag is missing or not coded, check with your furniture dealer.
- Check for colorfastness in an inconspicuous place.
- If possible, check upholstery stuffing. Colored stuffing may bleed through fabric when wet.
- Vacuum thoroughly to pick up loose debris and pet hair. Use a vacuum with a brush attachment and a crevice tool to clean in fabric folds.




1. Connect solution hose to the hose connection point on machine, next to Flow Indicator. Insert hose and turn clockwise until locked into place.



2. Open Hose Latch on the front of the machine and insert hose into place. Turn clockwise until locked into place.




3. Attach the cleaning tool to the end of the hose.



4. Clean by pressing the red trigger to spray solution onto the area to be cleaned. Slowly move the tool back and forth over the soiled surface.

Caution: Do not overwet.




5. Release the trigger to suction soiled water. Continue to clean in the area, working in small sections, until no more dirt can be removed.


⚠ WARNING To reduce the risk of injury, use extra care when cleaning on stairs. Keep machine on a level surface.

Emptying the Dirty Water Tank


Bissell[®]
BigGreen Commercial[®]



1. Remove the Dirty Water Tank by pulling the handle to the upright position and lift up. Carry the tank like a bucket to a utility sink or outside where you will dispose of the dirty water.




2. Unlatch the top of the tank from the bottom by pushing the handle all the way forward and lifting the top off. Pour dirty water into the sink.




3. Rinse both parts of the Dirty Water Tank with warm tap water. The top half of the Dirty Water Tank can also be rinsed clean through the nozzle area.

Cleaning the Hose and Tools



1. To clean attachments, remove from hose and rinse in clean, running water and let dry.



2. Clean the hose by removing it from the machine and running tap water run through both ends.

⚠ WARNING To reduce the risk of electric shock, turn Power Switch OFF and disconnect plug from electrical outlet before performing maintenance or troubleshooting checks.