




OWNER'S MANUAL

MODEL #CTOCAT1GR Outdoor car canopy
10.5ft x 9.2ft x 86.6in / 3.2m x 2.8m x 2.2m

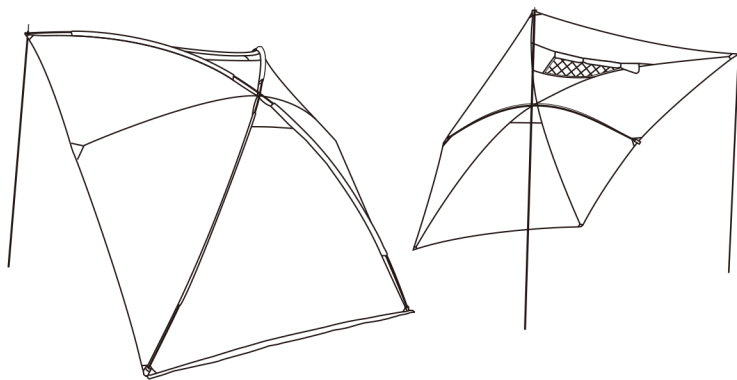

✓ QTY.	DESCRIPTION	PART NUMBER
FABRIC BODY		
— 1	Canopy top	N/A
POLES		
— 2	Fiberglass, shock-corded roof pole-sliver	Pole-A
— 1	Fiberglass, shock-corded roof middle pole-sliver	Pole-B
— 2	Steel, chain-corded support pole-Black	Pole-C
UNIVERSAL PARTS		
— 1	Carry Bag	N/A
— 1	Pole Bag	N/A
— 6	Guy Rope on Fly Bottom; 3M	GROP-3MBW
STAKES		
— 6	Steel Stakes Φ 5mm	STS-7IN

Review your parts list above to make sure all parts listed above have been included in your package.

ASSEMBLY INSTRUCTIONS

THIS RECREATIONAL PRODUCT REQUIRES TWO PEOPLE TO ASSEMBLE.

- Unless otherwise specified all instructions will be given assuming the assembler is facing the front opening of the tent.
- Carefully fold out your poles, using caution to prevent snapping the shock-cording. Make sure each pole segment is "seated" into the next section before flexing the pole during set-up.
- Do not drop tent bag or pole bag. Do not bounce tent bag on its end to remove tent, as these actions may damage the shock-cord and/or pole ends.
- Always store tent in the carry bag, do not drag or push tent across rough surfaces as it will cause extra wear and may puncture the floor, even when folded.


STEP 1: Verify Package Contents

Verify package contents by emptying contents of bag(s) and confirming all parts are included and undamaged.

Tip: Do this at home before you leave on your trip.


STEP 2: Lay out the canopy

- A) Select a smooth level site and spread out your canopy.
B) Extend poles and sort into groups.

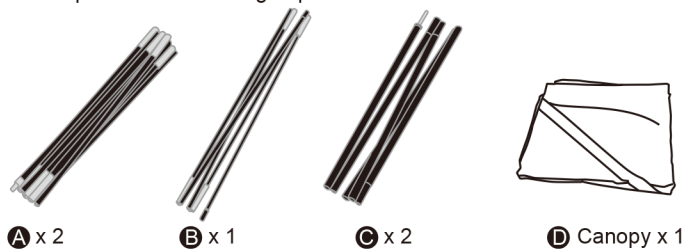


STEP 3: Assemble Canopy


- A) Place the roof poles (Pole A/B) in position for installation.

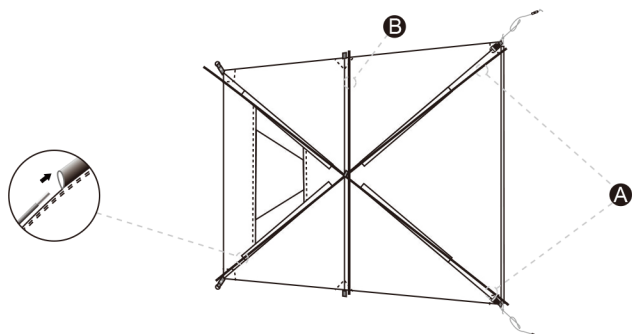

- B) Begin with two roof poles (Pole A) and slide into sleeves and webbing loops. Then insert one end into O-ring and the other into webbing pocket.
Caution: please make sure two roof poles insert through the webbing loops in the middle on canopy top.

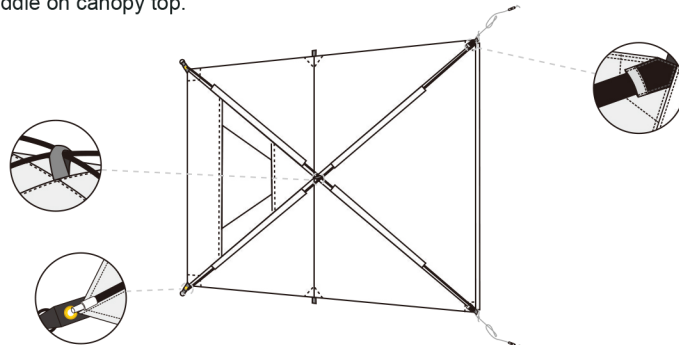

- C) Slide the ends of roof middle pole into webbing pockets at back on canopy's middle section. Securing it by tying with fabric string.

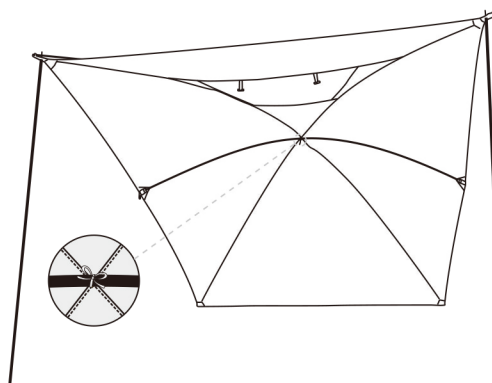


STEP 4: Attach canopy

- A) Choose the place you want the canopy to attach to. Use the guy ropes to fasten the canopy.
B) To lift the canopy, please insert the end of steel pole (Pole C) into plastic O-ring on the webbing at canopy's front corners.

STEP 5: Stake the canopy

- A) To secure guy lines, find the guy line plastic slider and look for the portion of the line opposite the knot. Pull this portion, forming a loop (works like a slip knot.) Extend guy line to ground and stakes. Repeat with remaining guy lines.

Tip: Stakes provided are for solid ground. Camping in sand? We suggest corks crew style. Check favorite retailer for availability.

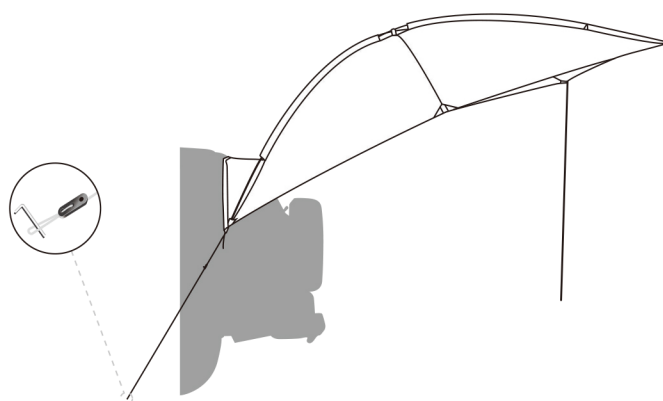

DISASSEMBLY INSTRUCTIONS

- Store all Poles and Stakes in their corresponding Bags to prevent any possible tearing or damage to the fabric piece(s).

STEP1: Pull out the stakes and place the stakes into stake bag.

STEP2: Remove and carefully fold the rest of the fiberglass poles.

STEP3: Fold the canopy into a rectangular shape the same width as pole bag, lay pole bag and stake bag at one end and roll tightly together, slowly squeezing air out.