AOLISHENG

DRAWER SLIDES INSTALLATION INSTRUCTIONS


- **Features**

Load capacity: 45kg/pair	
Available in lengths 8 inch - 24 inch	
Material:Cold Rolled Steel Q235/Stainless steel 201	
3-Fold Full Extension	Separable
Guided by: 2 ball cages	Fitting to the side panel:screw fixing
Fitting to drawer: screw fixing	

- **How to Chose Size**
  Measure the depth of the drawer.

① For example,if the depth is 13in/330mm,choose 12in/300mm drawer slides.
② Deviations of 0.7in/25mm-1in/30mm are suitable


- **Installation Precautions**

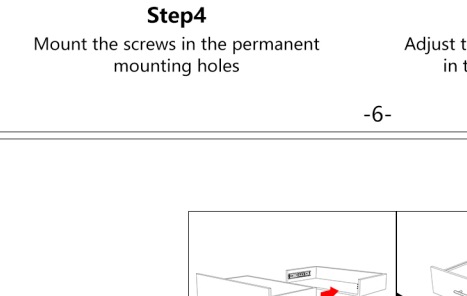


❶ 1.8" /45mm
❷ 0.5±0.01" /12.7±0.2mm

Installation Precautions:
The installation of the slide rails on both sides should be horizontally aligned, and the screws should be fixed in place.

- **Installation Instruction**

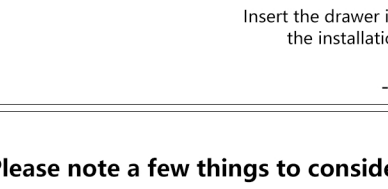

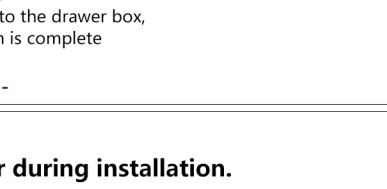

Step1

1:Press the release button and pull out the inner rail
(the outer rail and the middle rail are inseparable)
2:After the tracks are separated,go to the next step of the installation guide

Step2

Make sure the slides are leveled during
the installation process

Step3

Place the base slides stay with the
front edge of cabinet

Step4

Mount the screws in the permanent
mounting holes

Step5

Adjust the inner member.Mount the screws
in the permanent mounting holes

Step6

Insert the drawer into the drawer box,
the installation is complete

Please note a few things to consider during installation.

- When marking hole placements you MUST NOT drill through the slide holes during installation.Doing this will create metal filings which lodge in the tracks resulting in rough running and ultimately,failure of the slides.
- There must be no rubbing of the fixing against the moving slides.This will cause failure of the slide.
- Our slides are designed to be side mounted paired side by side.Mounting them vertically one above the other or in a flat position will void the warranty.