
crenova A6500

Multimedia Home Projector

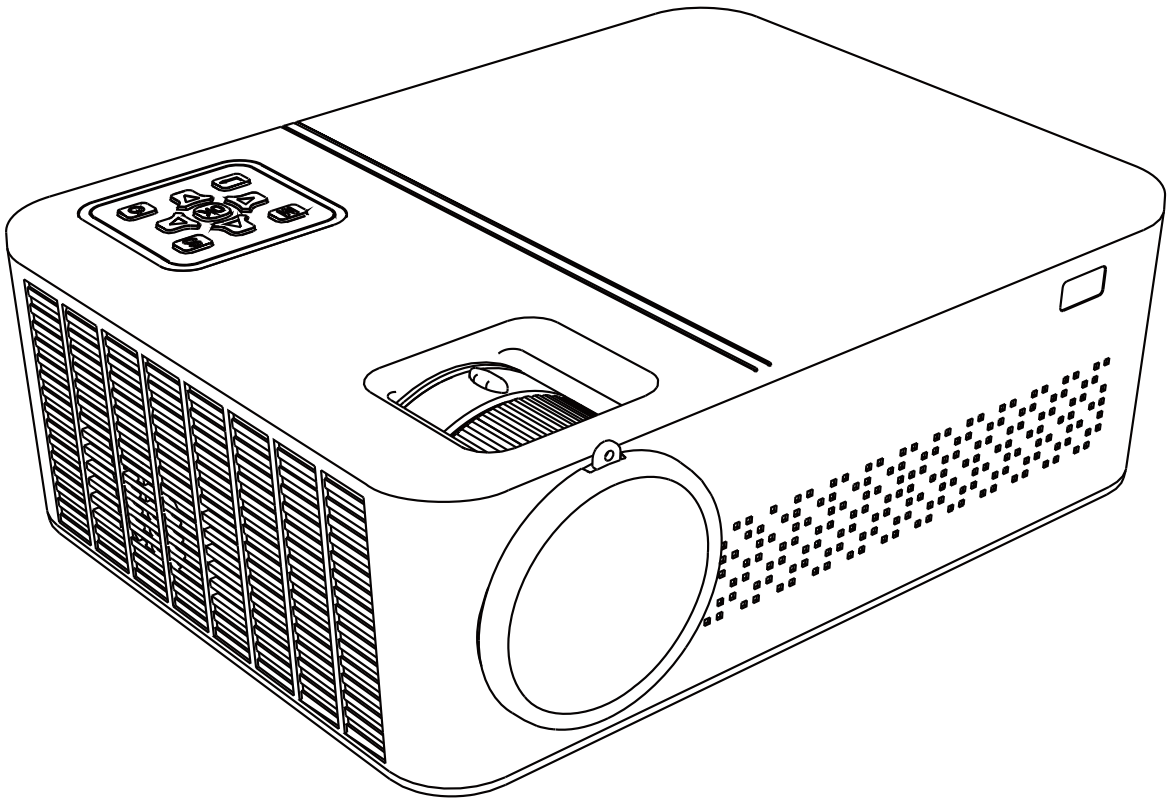

Quick User Guide

To ensure safe and proper use, please read this instruction before operation.

Customer Care

Have more questions?


Check out the FAQ on our website: www.crenova.net

Wanna share your feedback?

Tag us #Crenova on social media!


Facebook


Twitter


Ins


Youtube

Need other help?

Email: Service@crenova.net

Facebook: www.facebook.com/icrenova/


Warranty Terms

1. 24-month limited warranty of free replacement/partial/full refund
2. Timely customer service via Facebook/service@crenova.net
3. Lifetime professional support provided by Crenova


Box Contents

Ensure your projector box included all of these parts:


1. A6500 Projector
2. Remote Control
3. Power Cable
4. 3-in-1 AV Cable
5. HDMI Cable
6. Cleaning Cloth
7. Instruction Manual

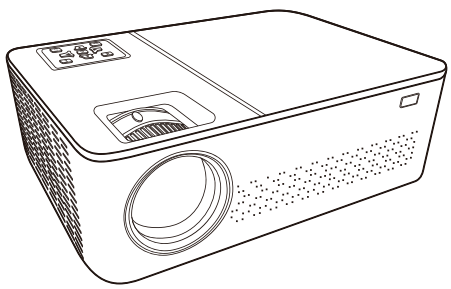


A6500 Projector

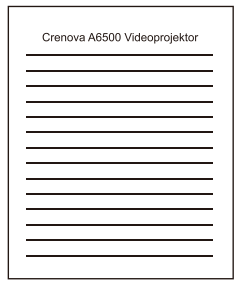


Instruction Manual




Cleaning Cloth




HDMI Cable

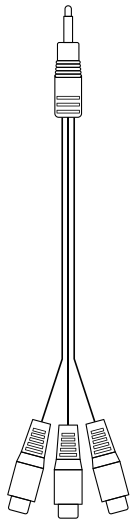

3-in-1 AV Cable





Power Cable

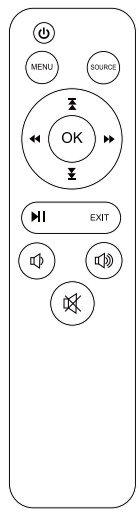


Remote Control


Product Parts

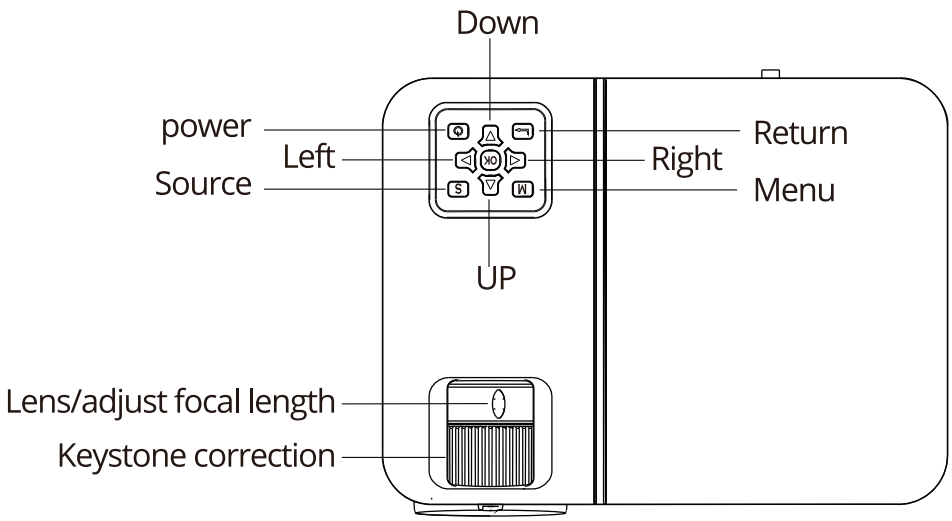

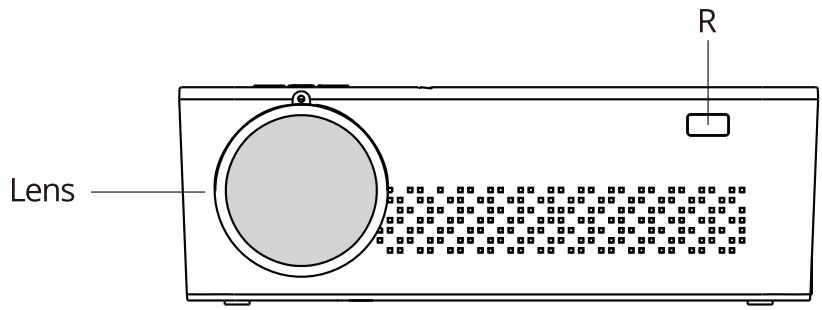

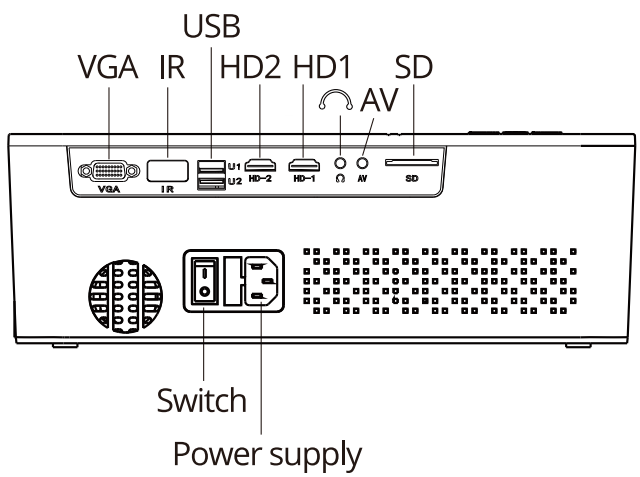

Remote Control

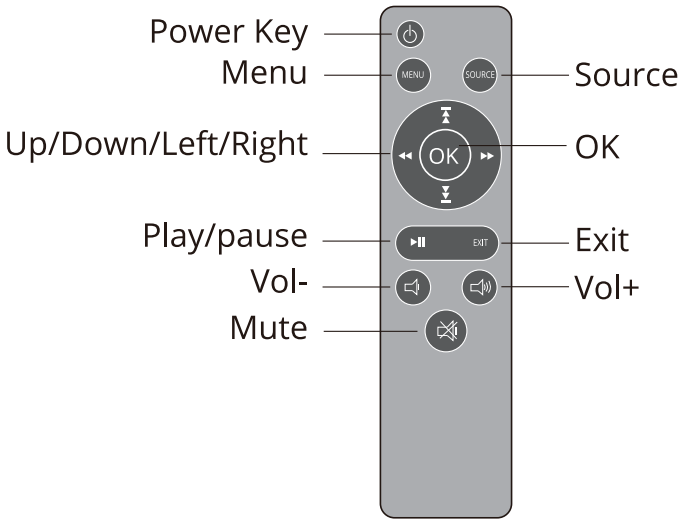

Power key: ON/OFF key

Mute: turns off sound

Menu: used to select functions

Exit Button: exits functions

OK Button: selects and confirms options

Vol+/Vol-: Increase or decrease the volume

Source: used to select the input channel of the signal

Up/Down/Right/Left: used to move upward/downward/right/left

Play/Pause: used to play/pause when playing files, pictures or videos

Basic Operation

1.Power on & Power off


5 seconds after power-on, turn on the power switch on the back of the projector, then press the power key on the projector panel or the remote controller to turn on the device.


Press the power key on the projector control panel or the remote control to turn off the device. And turn off the power switch on the back of the projector.

When the machine is turned off, unplug the power line in time to save energy.

2.Image Focus & Keystone Correction

Place the projector horizontally. Move the projector backward or forward to adjust the projection size by adjusting projection distance. Rotate the Focus Ring and adjust the Keystone Corre -ction simultaneously until to get the image clearly enough.

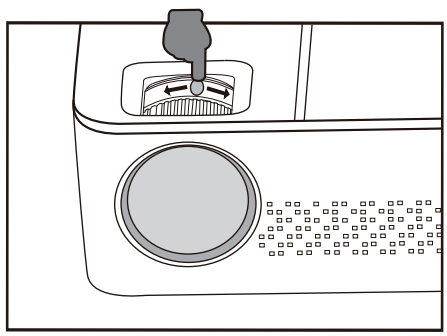


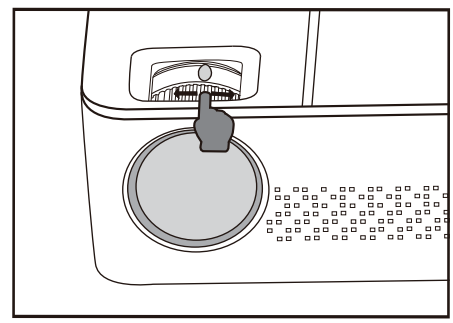

Multimedia Connections


Connect the multimedia device via the USB port/HDMIport/V-GA port/AV port/3.5mm audio jack/SD card port of the projector.

- USB Connection
- HDMI Connection
- VGA Connection
- 3.5mm Audio Device Connection
- AV Video Device Connection
- SD Connection

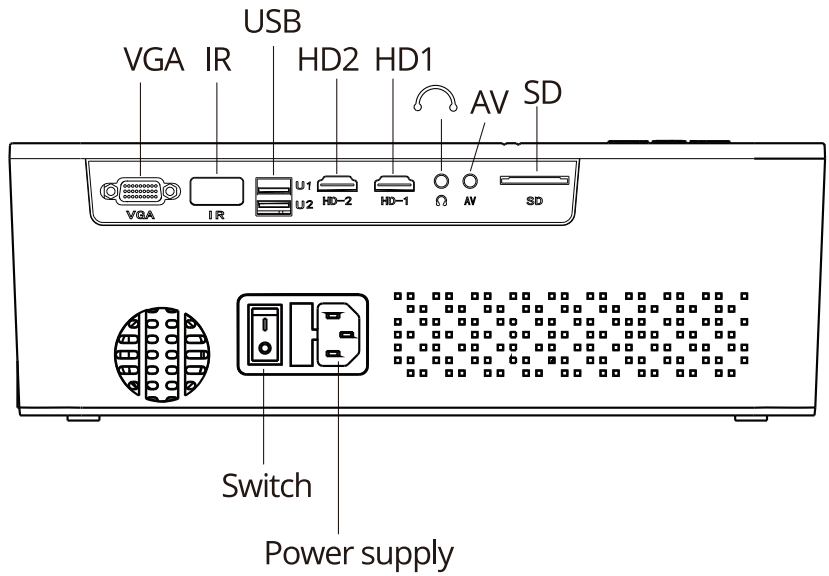


Select Signal Source

Choose the right input source according to your connected device.

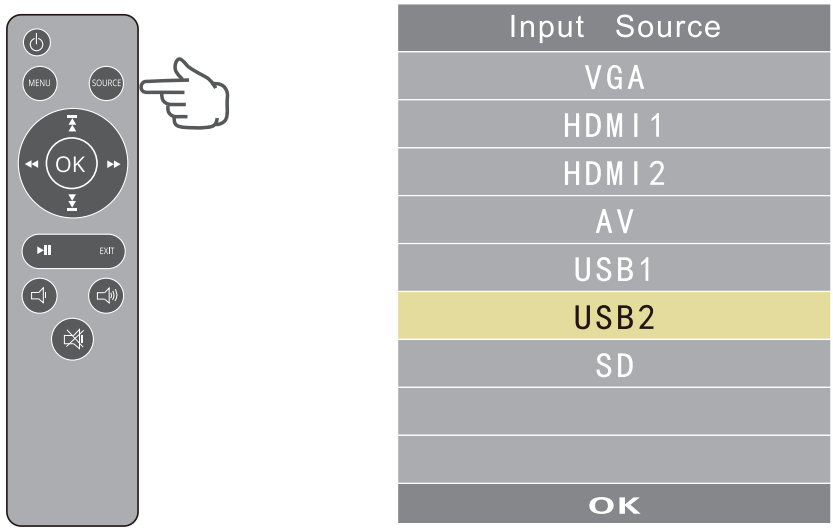


Then, choose the Picture/Music/Video/Text type before you start to play.

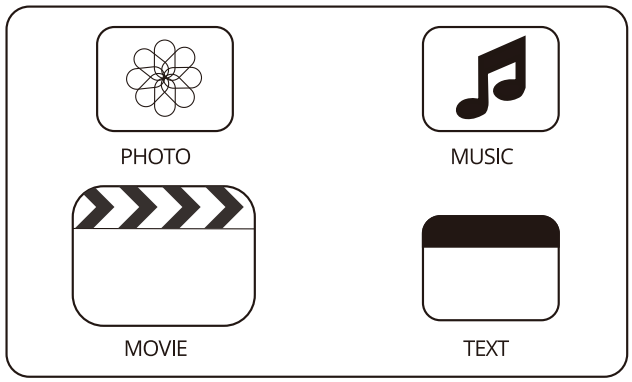


Projector Settings


Properly set up the projector for better film experience.
Open the video page and press "MENU" on the projector panel or remote control to the interface as shown below.

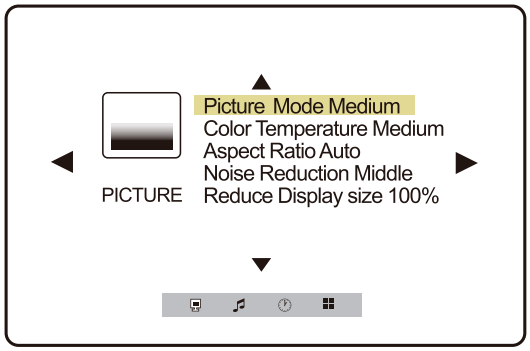


- **Picture Mode:** Preset "medium", "soft", "user" and "vivid" modes for different projected contents.
- **Color Temperature:** Preset "medium", "warm", "user" and "cool" color temperature modes for different color preferences.
- **Aspect Ratio Auto:** Preset "Auto" , "4:3", "16:9" and other options for the adjustment of display scale.
- **Noise Reduction Middle:** Preset "medium", "low", "high", "default" and other noise cancellation modes to set up the intensity of noise reduction.
- **Reduce Display size:** To proportionally reduce the screen scale, ranging from 75% to 100%.

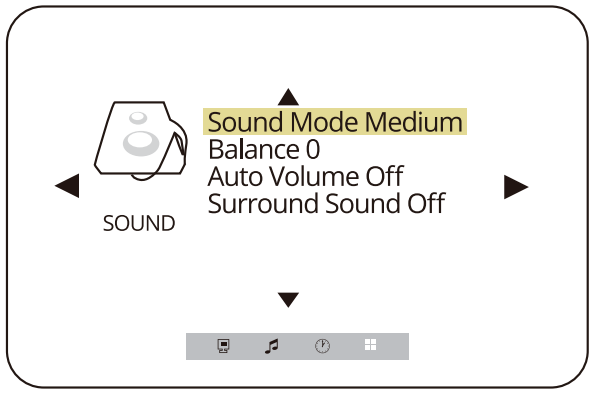

- **Sound Mode Medium :** Preset "medium", "music", "movie", "sport", and "user" mode for different projected contents.
- **Balance 0:** To set up the gain difference between the left and right channels.
- **Auto Volume Off :** Limit volume
- **Surround Sound Off:** To set up the surround sound effect.

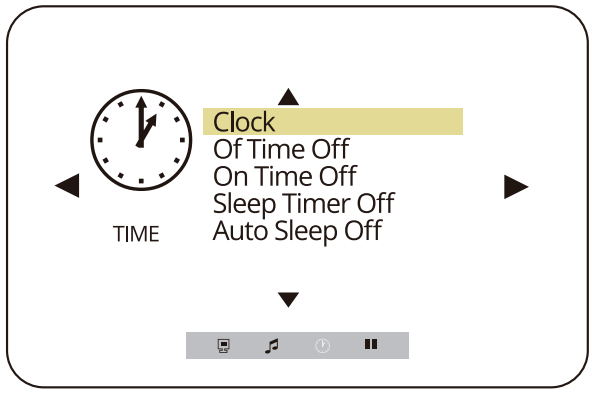


- **Clock:** Time can be set
- **On/Off Time off:** Set auto-start/automatic shutdown time
- **Sleep Timer off:** Sleep countdown
- **Auto Sleep off :** Automatic shutdown without signal

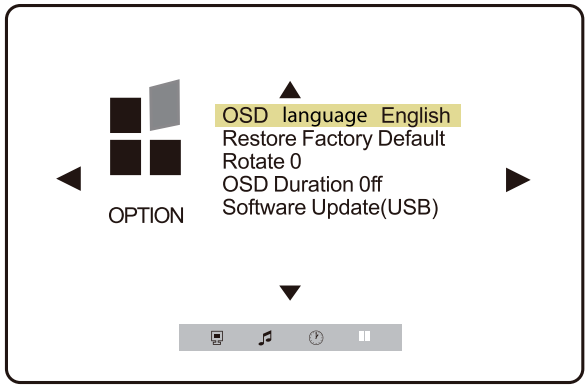

- **OSD Language English:** To sets up the language displayed in the operation interface.
- **Restore Factory Default:** To restore factory system settings.
- **Rotate 0:** To set up the direction of the image display. Suitable for adjusting image display directions for projectors mounted by different means.
- **OSD Duration Off:** Set the display time of the menu and automatically return to the startup page after the time expires.
- **Software Update(USB):** To update the system's software version (USB storage device should be inserted and have the correct upgrade patch).

Ceiling Installation


When install the projector, please use the hanger and screw of sufficient strength, so as to avoid projector falling accident. If the quality of the screw or screw in depth is not enough.

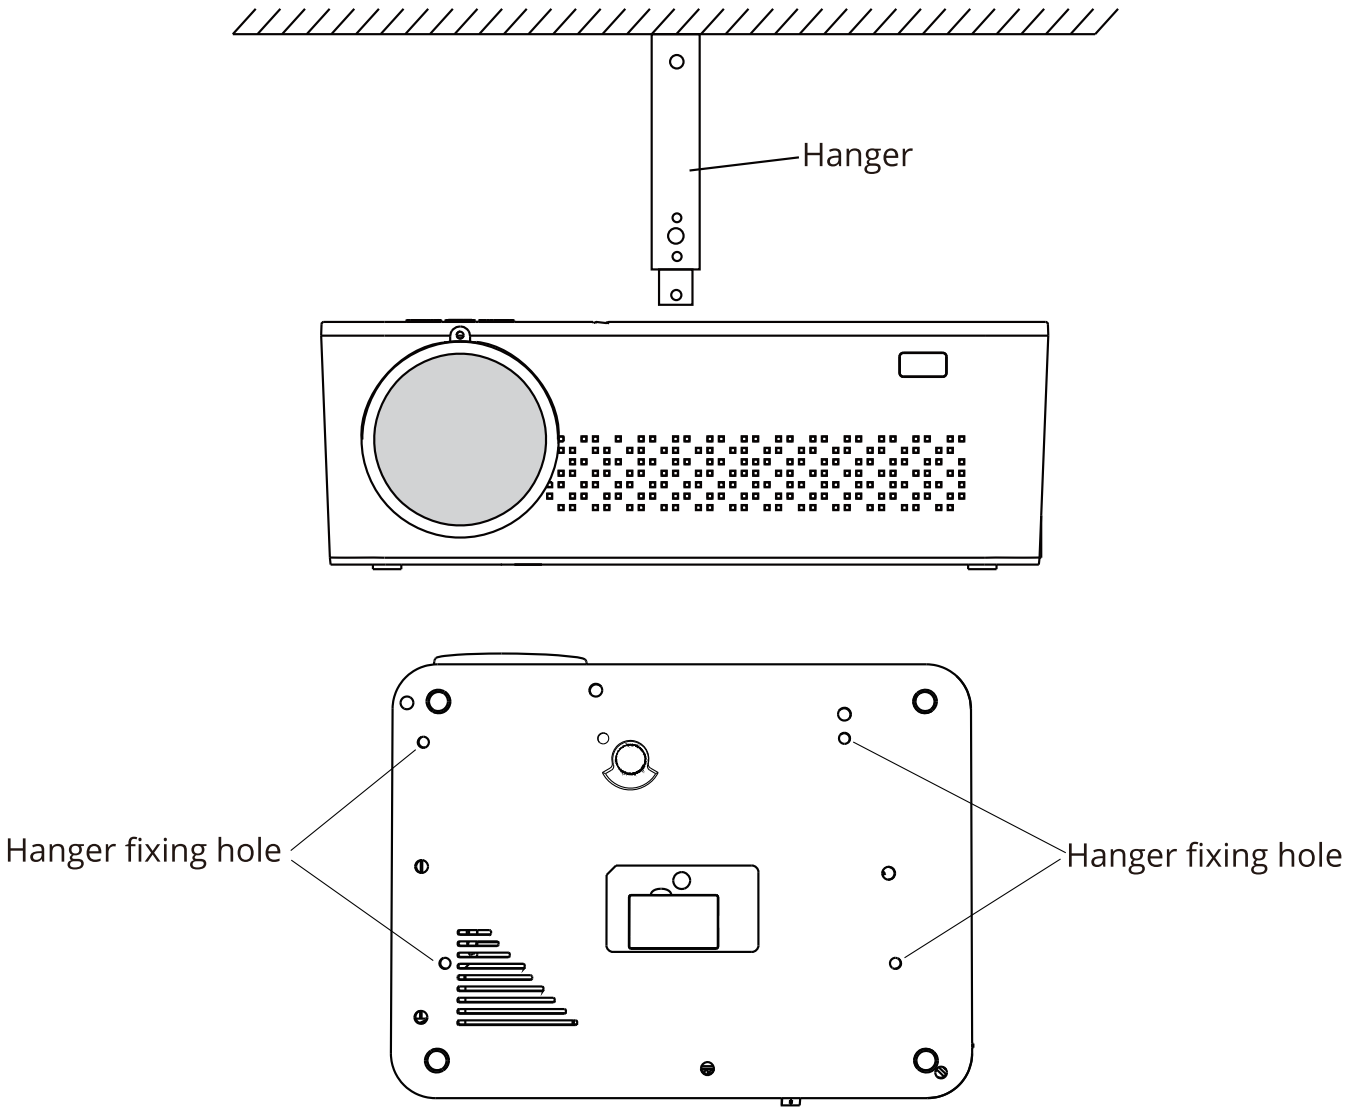


Correct Storage

Power off the projector through the following steps and store the device safely


- Press on body panel of the projector or remote control, and power off the device according to the prompts.
- Rotate the focusing ring into the device to ensure that the lens is fully contained inside the device.

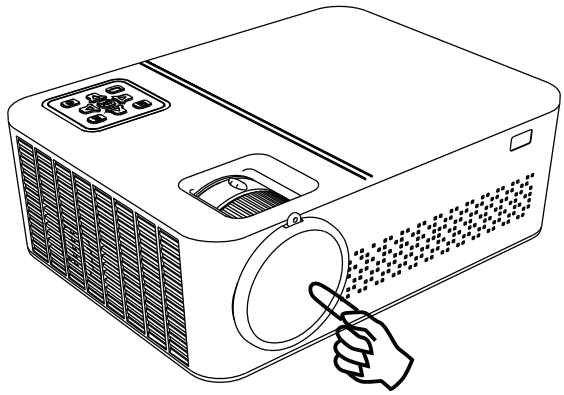


- Cover the dust-proof lens cap into the lens and store the device in a cool and dry place.

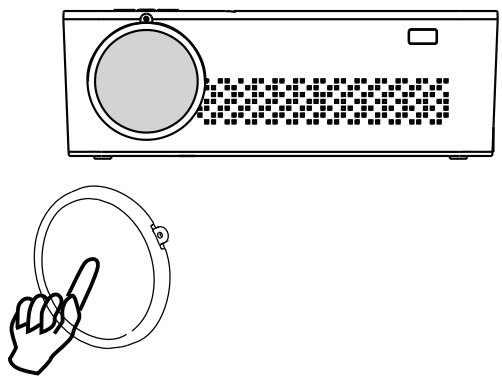

Projection Distance & Size

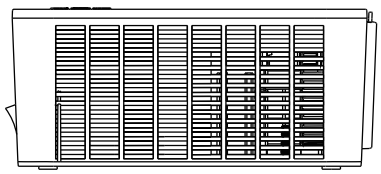

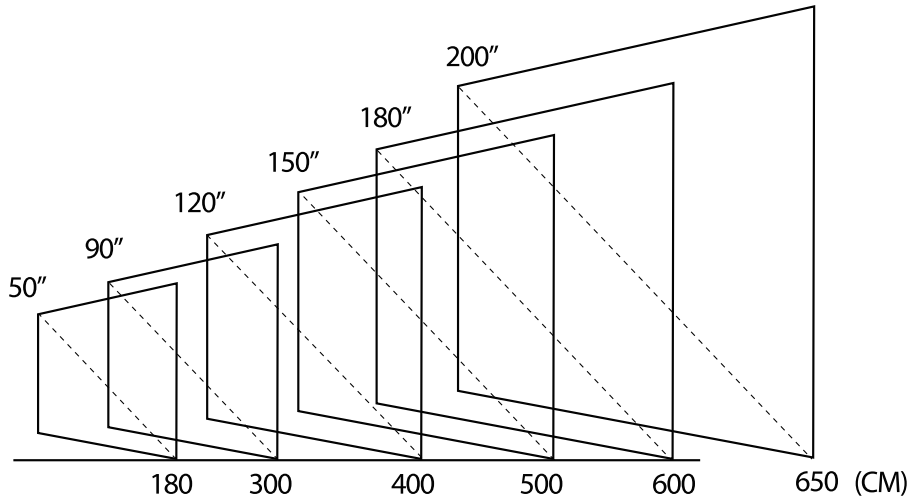

Helpful Tips


- Business data presentation is not recommended.
- Recommended to operate the projector in a dark room.
- The cooling system makes slight noise to avoid overheating.
- Recommended connecting an external audio device in larger scenes.
- Maximum supported resolution of the projector is 1920x1080 pixels.
- Do not hot-plug the device. Please power off before making any connections.
- Turn off this product when it's not in use to prolong the life of the projector.

FAQ

How to connect the IOS device/iPad?

Please use an extra adapter to connect the IOS device/iPad: Lightning to HDMI Adapter(Not Included). And select the HDMI source in the projector setting.


1. Connect extra Lighting to HDMI cable with 5V/2A USB AC Adapter.
2. Connect your projector via the HDMI cable.
3. Connect your iPhone, iPad, iPod with the Lighting to HDMI cable.
4. Click the "Trust" on your phone and wait 5 seconds to synchronize the phone with the projector.

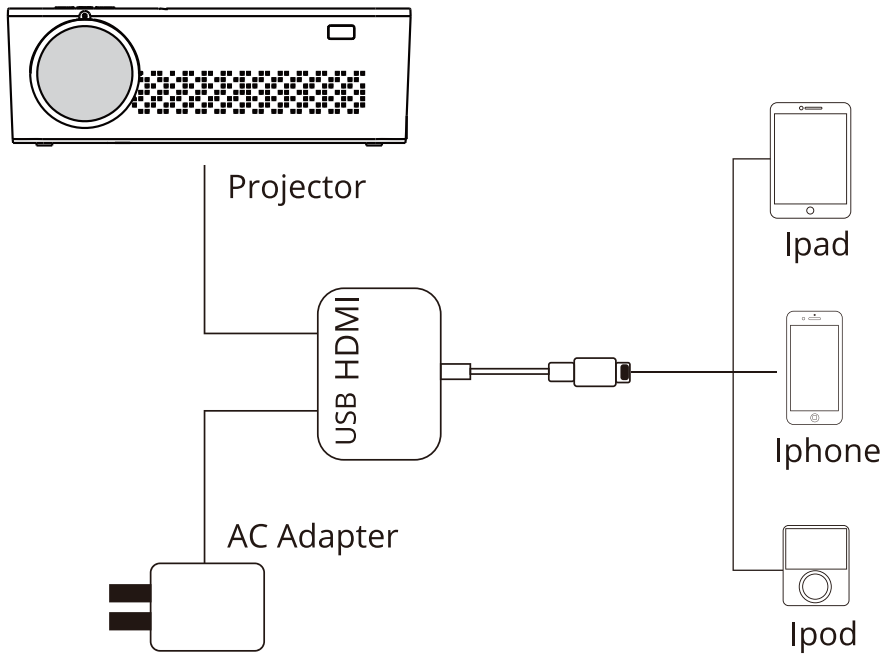

How to connect iMac/Macbook/Air?

Please use an extra adapter to connect the iMac/Macbook/Air: Mini DisplayPort/USB Type C to HDMI Adapter(Not Included). And select the HDMI source in projector setting.

Mini Display port/USB Type C to HDMI Adapter

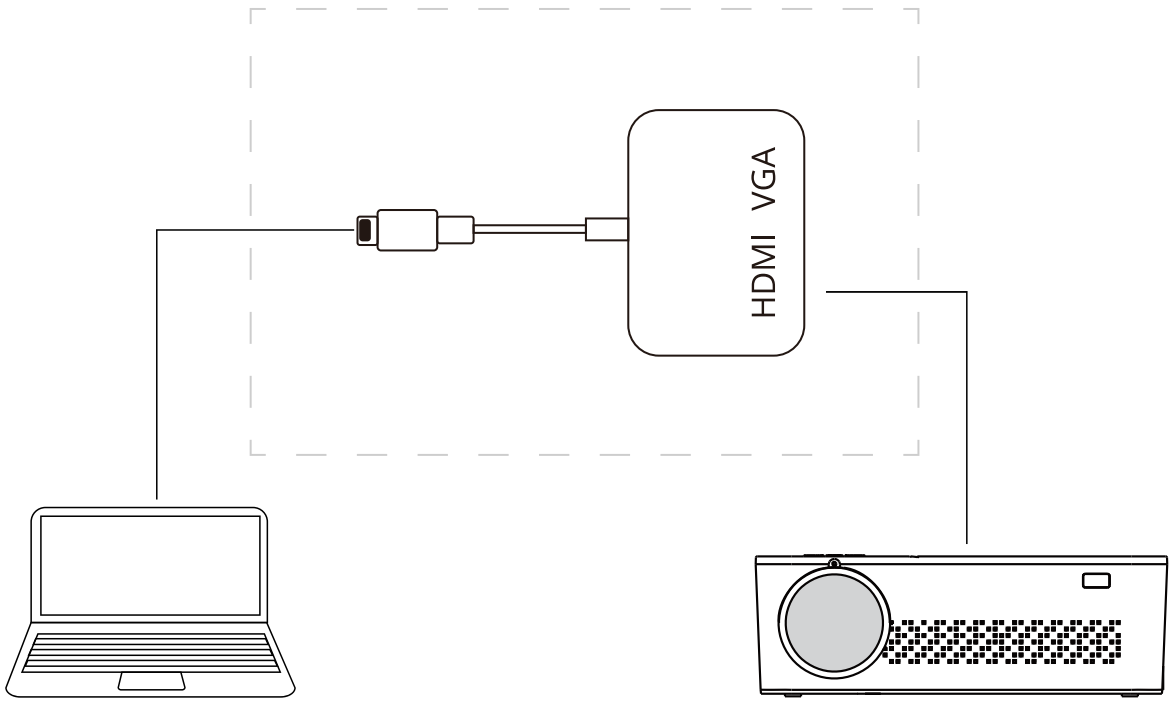

Macbook

Projector


How to connect Android phones?

Please use an extra MHL Micro USB to HDMI Adapter (Not Included) to connect the Android phones. And select the HDMI source in projector setting.

1. Connect extra charger 5V/1A.


2. Get in the Phone settings >Turn on the "Developer" option>Turn on the "USB Debugging".

3. It will sync successfully a few seconds later.

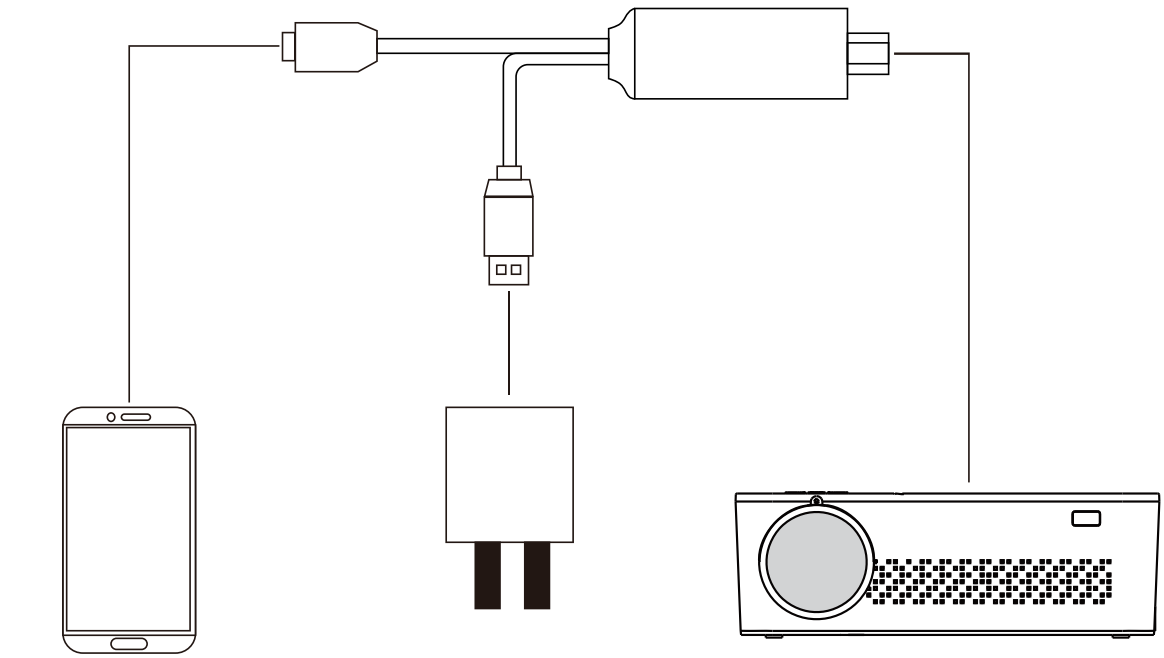

Android Phone Charger Projector

Or you can connect some Android Phones /Laptops with Multi-screen Interactive Function via Type-C to HDMI Adapter (Not Included).

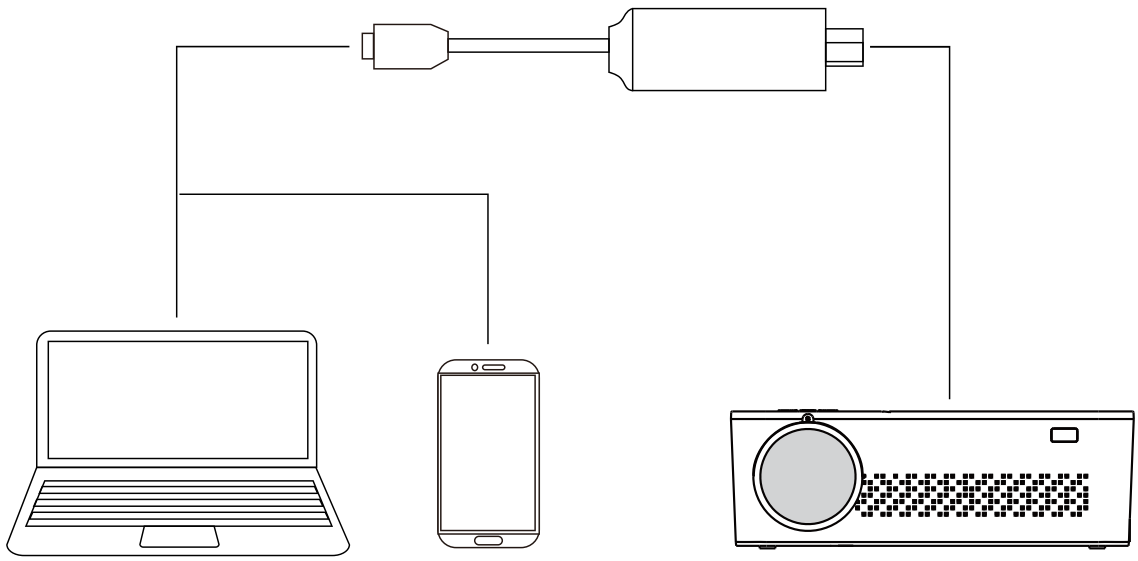

Laptop Android Phone Projector

Product Specifications

Image Technology	TFT LCD
Brightness	450（ANSI)
Native Resolution	1920*1080
Max Supported Resolution	1080P
Light Source	LED
Projection Distance	1.5-6.5M
Projection Size	35-200 inches
Aspect Ratio	16：9/ 4：3
Color	16.7K
Focus Method	Manual Zoom
Keystone Correction	±15° Correction
Consumption	130W
Power Supply	AC100-240V 50Hz/60Hz
Input Interface	HDMI*2,USB*2,AV*1,VGA*1
Output Interface	3.5mm Audio Out*1
Speaker	2*4ohm, 3W
Product Size	32*24*11CM
Net Weight	2.62KG

✉ Note: The specifications are subject to change without notification.