SANSI

LED Grow Light

User Guide

Product Overview

The drawings in this manual are for reference only.



Product and Accessories



Telescopic pole×1



Spliced Light Pole×3



Base×1



Lampshade×1



Bolt Kit×1



Bulb×1

Installation & Adjustment

⚠ Risk of electric shock! Disconnect power before wire connection.


1. The lamp head angle is adjustable
2. The telescopic pole is adjustable
3. When moving the bracket, never lift the telescopic pole directly to prevent it from falling off; you should hold the assembled spliced light pole firmly by hand.



Usage Diagram



Remote Control

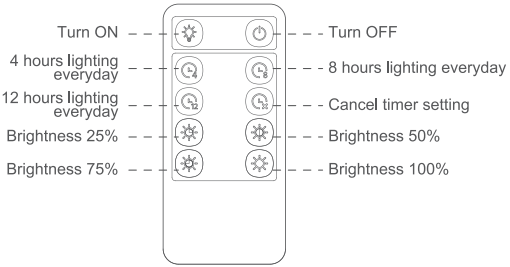

(The remote control is based on actual product)

Note: 1. Timer has a 24-hour cycle function. For example, if press “4 hours lighting everyday” button at 7:00 a.m., the lamp will turn off after 4 hours(at 11:00 a.m), and continue to work as this schedule every day.Press the timer button or cancel the timer, and the light will blink twice to indicate successful operation.
2. After setting the timer, unplug it and plug it in again, or turn it off and on again with remote control, it needs to be retimed.

Model: WBRT-RF10-4FSM01 FCC ID: 2A4AE-REM-P01
Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment. This device complies with Part 15 of the FCC Rulers. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference,and
(2) This device accept any interference received, including interference that may cause undesired operation.

Technical Data

Model: C23ZW005-V0032A27
Rated Power: 32W
Rated Voltage: AC 120V, 60 Hz
Spectrum: Full Spectrum
Color Temperature: 4000K
PPF (Photosynthetic Photon Flux): 40 μmol/s
Control Method: Remote Control
Brightness Adjustment: 4 levels
Timer Duration: 4 / 8 / 12 hours
Lifespan: 25000 hours
Ambient Temperature:
-20 ~ +40 ℃ (-4 ~ +104 °F)
Net Weight : Approx.
5.7 kg (Approx. 12.5 lbs)

Safety Warnings

1. This product is intended for indoor plant cultivation only.
2. Before first use, please read the user manual carefully. Pay attention to all warnings in the manual.
3. Ensure that the voltage indicated on the product label or in the manual matches your mains power supply voltage.
4. Do not perform installation or wiring while the power is connected.
5. Do not install/place the product in rooms with heat sources, hot steam, corrosive gases, flammable gases, vapors, dust, or similar harsh environments.
6. Position the light so that it is not viewed directly at a distance of less than 10 m for extended periods.
7. The product is for indoor use only. Do not expose it to rain.
8. Do not cover the product with cardboard, textiles, or similar materials.
9. Do not touch the light housing during operation to avoid burns!
10. Do not continue to use the product if it or any component is damaged, or if it malfunctions.
11. To avoid eye damage, do not stare directly at the light source for prolonged periods or direct it at people or animals.
12. The operating ambient temperature for this product is -20 ~ +40°C (-4 ~ +104°F). The product and accessories should be stored within a temperature range of -20 ~ +65°C (-4 ~ +149°F). Do not use the product in excessively high or low temperatures.
13. The light source and LED driver of this product are not user-replaceable. When they reach end of life, the entire product shall be replaced.

Warranty&contact

2-year warranty
Email: service@sansiled.com
Web: www.sansiled.com
Mfg. date is printed on the Certificate of Approval